





SPEAKER SPECIFICATION

项目 Items		规格 Specification	
1	公称阻抗 Nominal Impedance	$\Omega \pm 15\%$ at 1.0v	
2	最低共振周波数 Lowest Resonance Frequency	Hz $\pm 20\%$ Hz Without a baffle	
3	实效周波数带域 Effective Frequency Range	3K ~ 17KHz -10dB	
4	出力音压 Output Sound Pressure Level	90dB ± 3 dB 2.83V/1M at (6K,8K,10K,12K)Hz AVE.	
5	入力 Input	定格入力 Rated input 10 W	最大入力 Maximum input 20 W
6	磁束密度 Flux Density	----- $\pm 10\%$ GAUSS	
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 7.75 V	
8	动作试验电压 Operation Test	Must be normal at program source V	
9	极性 Polarity	/	
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: Sub Magnet:	/G
11	连续负荷试验 Life Test	Din45573 10W 96H	After the Test, Speaker should be meet the Outside and item 7,8
12	耐热试验 Heat Resistance	70°C ± 2 °C 30%-35%RH 8Hours and then room temperature 1 hours	
13	耐湿试验 Humidity Resistance	40°C ± 2 °C 90%-95%RH 8Hours and then room temperature 1 hours	
14	耐寒试验 Cold Resistance	/	
15	落下试验 Drop Test	1M 75° ± 2 °	
16	绝缘耐压试验 Insulation Resistance	Or more 1M Ω 以上	
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing	
18	失真率 Distortion	MAX	
19	各部 材质	Cone Paper	黑色全紙
		Voice Coil	21 Φ 雙面蜂鳴片
		Cap	/
20	总重量 Total Weight	/	

Frequency:

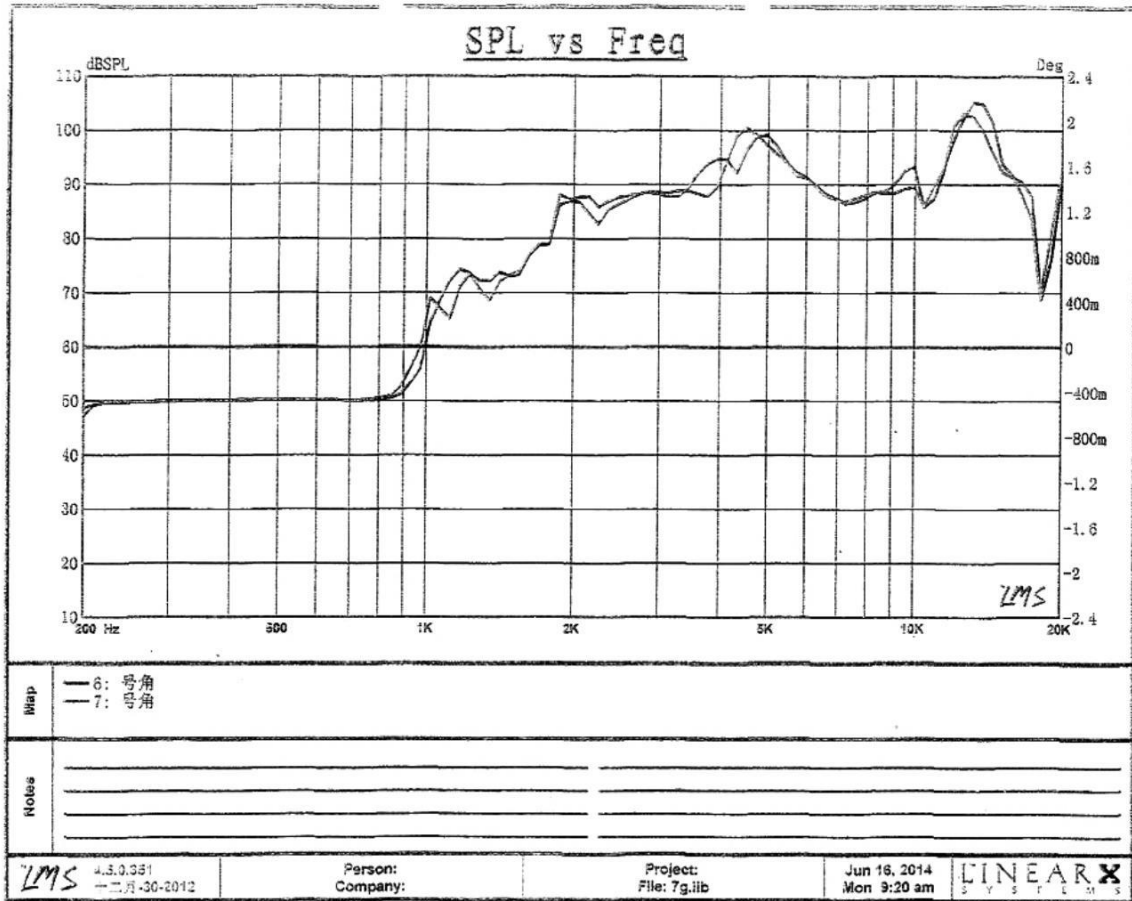

Mechanical Dimensions

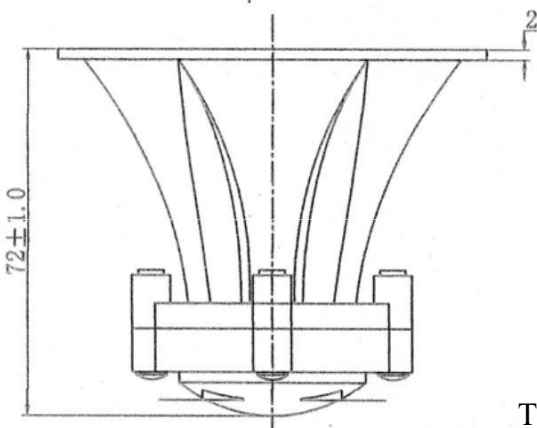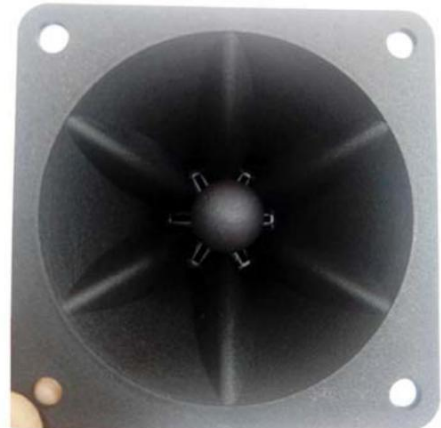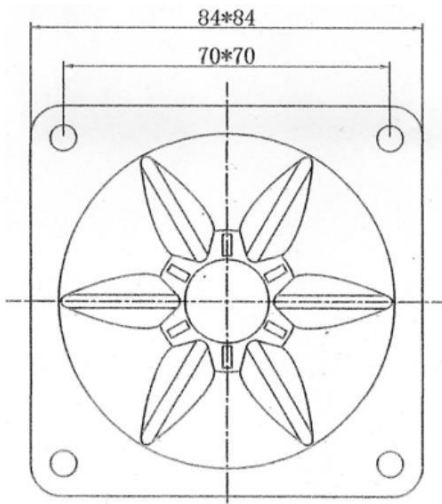

Tolerance: ± 0.5