

7-Channel Battery Charger



Instruction Manual

Please read and save all instructions to ensure safe and effective use of this product.


2. charging: the LED indicator will lights in red constant when battery is being charged.
3. full charged: the LED indicator will lights in green constant when battery is being fully charged.
4. alarm: the LED indicator will flash red and green alternately when there is the short circuit, bad battery , battery reverse, alkaline battery charging.
5. regarding the alarm detection for alkaline battery charging , it can not be 100% accurate identification, part of the alkaline batteries will be precharged, stopping charge after precharged and indicated as full charged state.

NOTE:

1. Please make sure the power adapter is equal or greater than 5V/2A.
2. The charger could support max 4pcs C/SC/D size batteries only in slot 1/3/4/6 at one time.

Specification

 Input	DC 5V/2A
 Battery Types	Ni-MH/Ni-Cd
 Max Wattage	10W

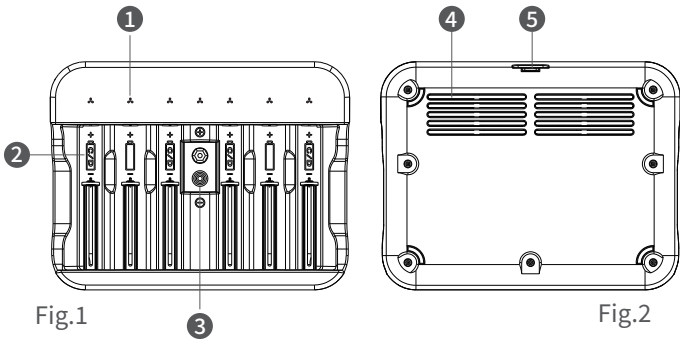

Description of the device

Basic elements (see Fig.1)

- 1 - LED indicator
- 2 - Battery slot for AA, AAA,C, D
- 3 - Battery slot for 9V battery
- 4 - Cooling grid

Power cable (see Fig.3)

- 1 - USB-A connector
- 2 - Type-C USB connector

Power connection (see Fig. 2)


- 5 - Type-C USB input port

 Current	AA ,AAA,C ,D: 500mA*6±20% 9V: 30mA*1 ±20%
 Size(L*W*H)	170*130*41 mm
 Weight	250g ±10g

Attention

-  Use sufficient power supply
-  Used for 1.2V Ni-MH/Cd AA, AAA, C, D, 9V battery
-  Don't expose to liquids
-  Avoid dropping
-  Don't disassemble
-  Avoid extreme temperature

Using the device

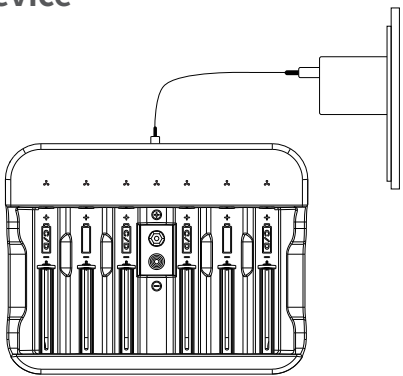

Power Supply

1. Connect the Type-C connector (see Fig. 3 -2) of the enclosed cable to the Type-C USB socket in the charger (see Fig. 2 - 5).
2. Connect the USB-A connector (see Fig. 3 - 1) of the enclosed cable to the adapter or other device from which the charger will be powered.
3. Make sure that the adapter is connected to the mains or that the device is sufficiently powered (5V/2A or more) or charged (eg laptop, powerbank, etc.)
4. LED Indicator Description:

1. self-detection: all LED indicators will flash red and green alternately once when the power is switched on, indicating that the charger self-detection well and is ready for charging.

Warranty Information

Our product is guaranteed to be free from manufacturing defects for a period of 12 Months.

If your product becomes defective during this period, Electus Distribution will repair, replace, or refund where a product is faulty; or not fit for intended purpose.

This warranty will not cover modified product; misuse or abuse of the product contrary to user instructions or packaging label; change of mind and normal wear and tear.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage.

You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

To claim warranty, please contact the place of purchase. You will need to show receipt or other proof of purchase. Additional information may be required to process your claim.

Any expenses relating to the return of your product to the store will normally have to be paid by you.

The benefits to the customer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods or services to which this warranty relates.

This warranty is provided by:
Electus Distribution
Address 46 Eastern Creek Drive, Eastern Creek NSW 2766
Ph. 1300 738 555