

digitech

Rechargeable Wireless Headset

with Charging Base and USB Audio Adapter




Model:
AA2181



Please read and save all instructions to ensure safe and effective use of this product.

Instruction Manual

PRODUCT OVERVIEW

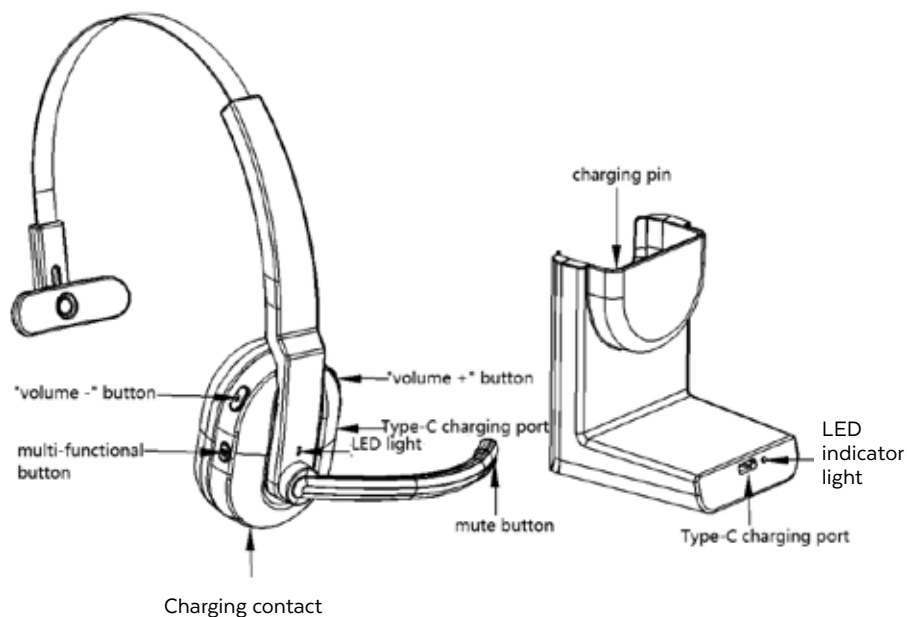

BOX CONTENTS

- 1 × Headset with Charging Base
- 1 × Dongle
- 1 × USB Type-C to USB Type-A Charging Cable
- 1 × User Manual

BASIC OPERATION

Basic Headset Functions

Button	Function	Operation Instruction
Multi-function button	Power On	When the headset is off, press and hold the Multi-function button for 2-3 seconds to turn it on.
	Power Off	When the headset is on, press and hold the Multi-function button for 3 seconds to turn it off.
	Pairing	Turn on the headset to enter pairing mode. Then double-press the Multi-function button to pair with your device.
	Play / Pause	Briefly press the Multi-function button to play or pause music.
	Answer a call	When there is an incoming call, briefly press the Multi-function button to answer.
	End a Call	During a call, briefly press the Multi-function button to end the call.
	Redial	When connected to a device or playing music, double-press the Multi-function button to redial the last number.
	Call Audio Switch	During a call, press and hold the Multi-function button for 1-2 seconds to switch the call audio between the headset and your phone.
	Three-way Calling	1. When a new call comes in during a call, briefly press the Multi-function button to answer the new call and end the current call. A beep will sound. 2. When a new call comes in during a call, double-press the Multi-function button to answer the new call and place the current call on hold. A beep will sound. 3. When a new call comes in during a call, press and hold the Multi-function button for 1-2 seconds to reject the new call and continue the current call. A beep will sound. 4. During a three-way call, double-press the Multi-function button to switch between the current call and the call on hold. A beep will sound.
	Reset	Press and hold the Multi-function button for 10-13 seconds to reset and restart the headset.
Microphone Mute Button	Mute/Unmute	During a call, briefly press the Mute button to mute the microphone. Press it again to unmute.

Button	Function	Operation Instruction
Volume +	Volume Up	While connected, briefly press the Volume + button to increase the headset volume.
	Next Track	Press and hold the Volume + button for 1 second to skip to the next track.
Volume -	Volume Down	While connected, briefly press the Volume - button to decrease the headset volume.
	Previous Track	Press and hold the Volume - button for 1 second to skip to the previous track.
Combination Button	Clear Paired Devices	Press and hold the Multi-function button and Volume - button simultaneously for 5 seconds to clear the pairing records. After clearing, AA2181 will no longer connect to previously paired devices automatically.
Charging Base Instructions	Charge the Headset	Place the headset in the charging base and connect the charging cable to a power source. The red light on the headset will remain on while charging.
	Charging Complete	The red light will turn off when the headset is fully charged.

Basic Dongle Function

Function	Operation Instruction
Power On	When the device is off, insert the USB dongle into a computer to turn it on.
Power Off	Unplug the USB dongle from the computer to turn it off.
Enter pairing mode	If there are no saved pairing records, the dongle will automatically enter pairing mode when powered on.
Reconnect	If a pairing record exists, the dongle will automatically reconnect when powered on. If the headset disconnects from the dongle, the dongle will enter reconnection mode.

Note: The dongle can only be connected to AA2181 headsets. It cannot be connected to other headset models.

PAIRING AND CONNECTION

Headset with a Mobile Phone

- Turn on the headset. The red and blue indicator lights will flash alternately, indicating that the headset is in pairing mode. (Figure 1)
- Enable on your phone, search for “AA2181”, and tap to connect. (Figure 2)
- Once pairing is successful, your phone will show “AA2181 Connected”.
- The headset will automatically reconnect to the last connected phone when it is turned on again.



Figure 1



Figure 2

Headset with Dongle

- Insert the dongle into a computer. Once recognised, the dongle's blue indicator light will flash rapidly.
- Turn on the headset and place it close to the dongle. The headset will automatically connect to the dongle.
- When the dongle's blue indicator light remains steadily lit, pairing is complete.

Connection with two devices

The headset can be connected to two devices at the same time.

- Press and hold the Multi-function button for 2 seconds to enter pairing mode. The red and blue LED indicators will flash alternately.
- Enable on Device 1, search for “AA2181”, and tap to connect. Once connected, the blue indicator light will flash slowly.
- Turn off on Device 1. The headset will automatically re-enter pairing mode.
- Enable on Device 2, search for “AA2181”, and tap to connect.
- Once Device 2 is connected, turn back on for Device 1. Device 1 should reconnect automatically. The headset is now connected to both devices.

Note: Only one device can play audio at a time. To play audio from the other device, pause or stop playback on the first device.

LED Indicator - Headset

Mode	LED Indicator
Power On	Blue LED flashes twice.
Power Off	Red LED flashes twice.
Pairing Mode	Red and blue LEDs flash alternately.
Connected / Standby Mode	Blue LED flashes once every 10 seconds.
Playing Music	Blue LED flashes once every 10 seconds.
During a Call	Blue LED flashes once every 10 seconds.
Incoming Call	Blue LED flashes.
Manual Reconnection	1. When reconnecting after power-on, the red and blue LEDs flash alternately. 2. When reconnecting after being out of range, the blue LED flashes once every 10 seconds.
Clear Pairing History	Red and blue LEDs light up simultaneously for 1 second.
Charging	Solid red LED.
Fully Charged	Solid blue LED.
Low Battery	Red LED flashes.


LED Indicator - Dongle

Mode	LED Indicator
Power On	Blue LED flashes.
Power Off	Blue LED turns off.
Pairing Mode	Solid blue LED.
Reconnecting	Blue LED flashes once every second.
Connected	Blue LED flashes rapidly.

CHARGING

Headset charging

- When the red LED flashes, charge the headset as soon as possible.
- Charging takes approximately 2 hours.
- When charging is complete, the blue LED remains on.
- Connect the Type-C charging cable to the headset charging port and a USB power source, such as a USB wall charger, car charger, computer USB port, or power bank.

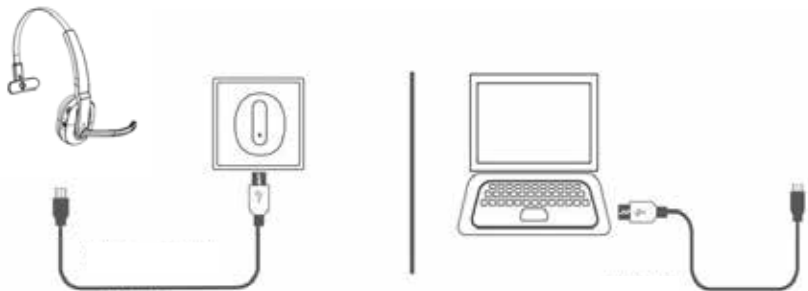

Type-C Charging Cable / Charging with a USB Charger / Charging with a Computer

Note: Actual battery life and charging time may vary depending on usage, volume level, environmental conditions, and connected devices.

- Charge the AA2181 headset at least once every 3 months, even when it is not in use.
- The AA2181 headset can be used while charging.

VOICE PROMPTS

Status	Voice Prompt
Power On	"Power on"
Power Off	"Power off"
Pairing Mode	"Pairing"
Connected	"Connected"
Disconnected	"Disconnected"
Low Battery	"Low battery. Please charge." Repeats every 3 minutes.
Microphone Muted	"Mute on"
Microphone Unmuted	"Mute off"

TROUBLESHOOTING

What should I do if the headset fails to reconnect?

When the headset is turned on, it will automatically attempt to reconnect to the last paired device. If the headset goes out of range, it will automatically reconnect when it returns within range within 10 minutes. If no connection is established within 10 minutes, the headset will turn off automatically. If the headset does not reconnect after being turned on, enable on your device and reconnect manually.

How do I clear the pairing records?

When the headset is powered on and not in a call, press and hold the Multi-function button and Volume - button simultaneously for 5 seconds to clear the pairing records. After the pairing records are cleared, the headset will no longer connect to previously paired devices automatically. Clear the pairing records if the headset cannot connect to your device.

What devices can be used to charge the headset?

Use a USB power source with a DC 5 V output and a charging current of at least 500 mA, such as a USB charger, power bank, or computer USB port.

What should I do if the headset fails to turn on or connect?

Press and hold the Multi-function button for 13 seconds to reset and restart the headset. If the issue continues after restarting, contact customer service or the manufacturer for technical support.

When does the AA2181 turn off automatically?

The headset will turn off automatically in the following situations:

- No device is connected for more than 10 minutes.
- The battery voltage falls below 3.7 V.
- The headset remains disconnected for more than 10 minutes after moving out of range.

SPECIFICATION

Headset Specifications

Version	6.0
Chipset	BT8926B2
Operating Frequency	2.400–2.4835 GHz
Profiles	AVRCP, A2DP, HFP, HSP
Audio Codecs	AAC, SBC
Range	Up to 10 m
Battery Type	3.7 V, 400 mAh lithium polymer battery
Charging Time	Approx. 2 hours
Music Playback Time	Approx. 75 hours at 70% volume
Talk Time	Approx. 40 hours at 70% volume
Standby Time	Approx. 120 hours
Charging Input	DC 5V 1A
Operating Temperature	–10°C to 55°C
Headset Dimensions	39.61 × 149.95 × 163.82 mm
Net Weight	Approx. 72 g

Dongle Specifications

Version	5.0
Chipset	BT8818
Operating Frequency	2.400–2.4835 GHz
Profiles	A2DP, HFP, AVRCP
Audio Codec	SBC
Class	Class II
Range	Up to 10 m
Audio Input	Computer
Power Input	USB
Operating Voltage	4.5–5.5 V
Dongle Dimensions	25.9 × 14.58 × 8.5 mm
Dongle Net Weight	Approx. 2.5 g

WARRANTY INFORMATION

Our product is guaranteed to be free from manufacturing defects for a period of 12 Months.

If your product becomes defective during this period, Electus Distribution will repair, replace, or refund where a product is faulty; or not fit for intended purpose.

This warranty will not cover modified product; misuse or abuse of the product contrary to user instructions or packaging label; change of mind and normal wear and tear.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law.

You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

To claim warranty, please contact the place of purchase. You will need to show receipt or other proof of purchase. Additional information may be required to process your claim.

Any expenses relating to the return of your product to the store will normally have to be paid by you.

The benefits to the customer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods or services to which this warranty relates.

This warranty is provided by: Electus Distribution
Address 46 Eastern Creek Drive, Eastern Creek NSW 2766
Ph. 1300 738 555