


ROCKER SWITCH  
SK0995

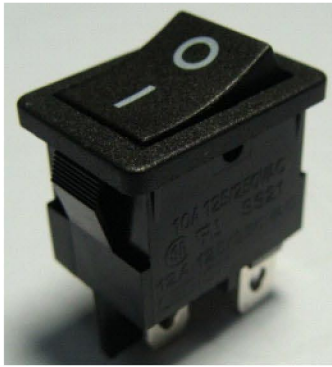

SPECIFICATION

Rating: 10A 125/250VAC(UL)

12A 125/250VAC(CSA)

16(4)A 250V~T85/55(ENEC10,VDE,NEMKO,CQC)



INITIAL CONTACT RESISTANCE: 20mΩ Max

OPERATION FORCE: 500±200gf

INSULATION RESISTANCE: 100mΩ MIN 500VDC

WITHSTAND VOLTAGE: 1000VAC FOR 1MINUTE

ENDURANCE: 10,000CYCLES



PANEL CUTOUT DIMENSION

PANEL THICKNESS	X	Y
0.75-1.25mm	19.2 <sup>+0.1</sup> <sub>-0.1</sub> mm	12.9 <sup>+0.1</sup> <sub>-0.1</sub> mm
1.25-2.0mm	19.4 <sup>+0.1</sup> <sub>-0.1</sub> mm	12.9 <sup>+0.1</sup> <sub>-0.1</sub> mm
2.0-3.0mm	19.6 <sup>+0.1</sup> <sub>-0.1</sub> mm	12.9 <sup>+0.1</sup> <sub>-0.1</sub> mm

