

CONCORD



8K60 HDMI 2 Way Splitter

Instruction Manual

AC5007

SAFETY INSTRUCTIONS

Before using this product, please carefully read the following safety instructions to ensure its proper use and keep this manual for future reference:

- To prevent electric shock, do not attempt to open the product.
- Only qualified personnel should perform any repairs or maintenance.
- Always place the product on a stable, flat surface to prevent it from falling.
- Do not expose the product to water, moisture, or high-humidity environments to avoid the risk of damage.
- To prevent damage from direct sunlight or high temperatures, do not expose the product to such environments.
- Do not place the product near heat sources like radiators, heat registers, stoves, or other heat-producing apparatus.
- Do not place any objects on top of the product to avoid damage.
- Use only the attachments and accessories specified by the manufacturer.
- During lightning storms or prolonged periods of disuse, unplug the power supply to prevent damage.

INTRODUCTION

The HDMI™ 8K splitter 1x2 lets you share two HDMI™ displays or projectors with an HDMI-enabled audio / video source device. With support for Ultra HD (8K@60Hz) the HDMI™ splitter ensures astonishing picture quality, four times the resolution of UHD 4K@60 Hz. The 8K splitter is also backward compatible with previous HDMI™ revisions, supporting 4K/1080p / 720p HDMI™ video resolution devices. Even if you don't require 8K video today, the HDMI™ 8K Splitter 1x2 ensures you'll be ready to take advantage of tomorrow's display technology. It features three different EDID modes auto/copy/downscaler for meet needs of different display occasion.

BOX CONTENTS

- 8K60 HDMI 2 Way Splitter
- User Manual
- USB-A to USB-C Power Cable
- Mains Power Supply

FEATURES


- Support three different EDID modes auto/copy/downscaler
- When turn to the auto EDID function, it can get the lower resolution and audio format of the both output for the input device to output the signal to fit both outputs
- When turn to the copy EDID function, it can copy the output1 resolution and audio format for the input device to output the signal, if the other output device supported resolution is lower than the output1 connected device, it will downscaler the resolution and keep the same audio format, HDR format and deep color with the output1, or it will output same signal to both outputs
- When turn to the downscaler function, it can downscale the input 8K resolution to 4K or 1080p by the UHD (4K) or FHD (1080p) Display for fixed connect to the output2 port and 8K Resolution to the 8K Displays Simultaneously for fixed connect to the output1 port.
- Support full 3D video format
- Support high definition resolution 8K@60Hz 4:4:4, 4K@120Hz and 1080P@240Hz
- Support 1000MHz/10Gbps per channel bandwidth (48Gbps all channels)
- Support 12bit per channel (36bit all channels) deep color
- Support HDCP 2.3, and back compatible with the HDCP2.2 and HDCP1.4
- Support High Dynamic Range (HDR) video pass-through, such as HDR10/ HDR10+/Dolby vision etc.
- Support Consumer Electronics Control function
- Support uncompressed audio such as LPCM
- Support compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)

NOTE: If you would like to output 8K@60Hz,4K@120Hz and 1080P@240Hz via the switcher in your displays, please make sure your source devices, your cable and your monitors can all support the resolution and refresh rate you need to output before

NOTE: You need connect standard HDMI-compatible 2.1 cable to enjoy 8K visual effects

NOTE: If in downscaler mode the supported resolution only can up to 8K@60 4:2:0 for the main chip performance limited

PRODUCT DIAGRAM

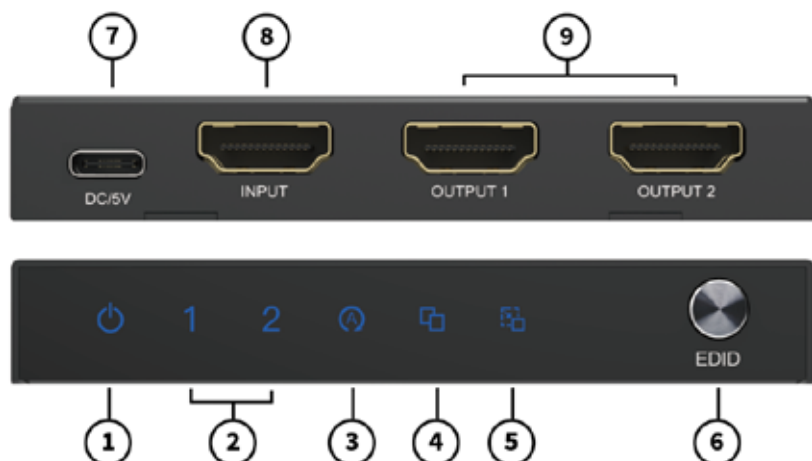

1. **Power LED**
2. **1-2:** HDMI Output 1-2 LED Indicator
3. **Auto Mode LED Indicator:**
ON is In Normal Auto EDID Mode which gets the Lower Resolution and Audio Format of the Both Output for the Input Device to Output the Signal to Fit Both Outputs
4. **Copy Mode LED Indicator**
ON is In Copy EDID Mode which copy the Output1 Resolution and Audio Format for the Input Device to Output the Signal
5. **Downscaler Mode LED Indicator**
ON is In Downscaler EDID Mode which can downscale the Input 8K Resolution to 4K or 1080p by the UHD (4K) or FHD (1080p) Display for fixed connect to the output2 port and 8K Resolution to the 8K Displays Simultaneously for fixed connect to the output1 port.
6. **EDID:** Three EDID select button for downscaler, auto and copy
7. **DC/5V:** USB-C DC 5V Input
8. **INPUT:** HDMI Input port
9. **OUTPUT 1-2:** HDMI Output 1-2 port

CONNECTION DIAGRAM



TROUBLESHOOTING

Power light is off and product is not working. How can I fix this?

First, please check the following items:

1. Ensure that your device's HDMI input device properly connected and power it on.
2. Check the HDMI port is selected correctly properly connected as using.

My display flickers when I use the switcher.

This may be caused by one or more of the following:

1. Make sure the HDMI cable and splitter are securely connected.
2. Ensure the HDMI cable is standard HDMI 2.1 cable and the length is under the splitter limited length 2 meters HDMI in and out at 8K/60Hz 4:4:4, 4K@60Hz can reach 4M in and 4m out.
3. Change to the another port to have a try of the display
4. Change to the another EDID mode to check the display normal or not.

The switcher auto switch function can't work normally.

No, The product can two 8K displays at the same time synchronously at the "auto" and "copy" mode. it need the both displays support the same 8K resolution. If at the downscaler mode,the output1 will output 8K@60Hz 4:2:0,and the output2 will output the 4K or 1080p resolution which fit the connected display's resolution.

SPECIFICATIONS

| | |
|----------------------------------|--|
| Input Ports | HDMI x 1 |
| Output Ports | HDMI x 2 |
| Vertical Frequency Range | 50/60Hz |
| Video Amplifier Bandwidth | 10Gbps/1000MHz per channel(40Gbps all channels) |
| Interlaced(50&60Hz) | 480i,576i,1080i |
| Progressive(50&60Hz) | 480p,576p,720p,1080p,4K@24/30Hz,4K@50/60/120Hz, 8K@24/30/50/60Hz |
| Operating Temperature | 0°C to 70°C |
| Storage Humidity | 5% to 90% RH non-condensation |
| Power Supply | 5V/2A (Included) |
| Power Consumption (Max) | 10W |
| Dimension(LxWxH) | 90 x 44 x 14mm |
| Net Weight | 90g |
| Material | Metal |

NOTE: Specifications are subject to change without notice.

WARRANTY INFORMATION

Our product is guaranteed to be free from manufacturing defects for a period of 12 Months.

If your product becomes defective during this period, Electus Distribution will repair, replace, or refund where a product is faulty; or not fit for intended purpose.

This warranty will not cover modified product; misuse or abuse of the product contrary to user instructions or packaging label; change of mind and normal wear and tear.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

To claim warranty, please contact the place of purchase. You will need to show receipt or other proof of purchase. Additional information may be required to process your claim.

Any expenses relating to the return of your product to the store will normally have to be paid by you.

The benefits to the customer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods or services to which this warranty relates.

This warranty is provided by:

Electus Distribution

Address 46 Eastern Creek Drive, Eastern Creek NSW 2766

Ph. 1300 738 555