

Rechargeable Portable PA Amplifier


AM-4075

Specifications:

Speaker Output:	15W
Speaker Size:	6 inch
Transmission Range:	30m
Transmission Frequency:	524.5MHz
Frequency Response:	50Hz - 16kHz
Battery Use Time:	3 hours average
Transmitter Power:	2 x AA (required)
PA Power Input:	240VAC / 12VDC (power supply required)
Dimensions:	305(H) x 182(W) x 125(D)mm



User Manual

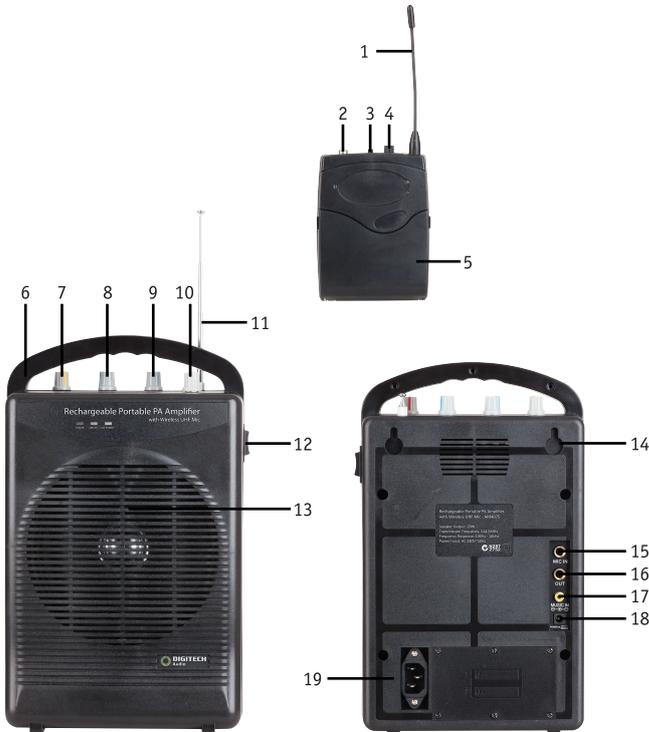

- | | |
|-----------------------------|---------------------------|
| 1 Antenna | 10 Master Volume Control |
| 2 Microphone Input | 11 Telescopic Antenna |
| 3 Power Switch | 12 Power/Charge Switch |
| 4 Volume Control | 13 Speaker |
| 5 Battery Compartment | 14 Mounting Holes |
| 6 Handle | 15 Wired Microphone Input |
| 7 Echo Control | 16 Audio Output |
| 8 Tone Control | 17 Line Mono Input |
| 9 Microphone Volume Control | 18 12VDC Power Input |
| | 19 240VAC Power Input |

Preparation

- TRANSMITTER: Place 2 x AA battery in to the transmitter. Ensure to follow the polarity marks. Then insert the head set in to the input of the transmitter, use the slide switch to turn on. There is a knob on the top of the transmitter which can control the volume of the microphone.
- SPEAKER: Connect unit to power using the supplied cable for charging or power on the unit. Use the switch located on the side of the unit to turn the unit on, off or in to charge mode.

Speaker

- The speaker has control for Echo, Tone, Microphone and Master volume. The knobs on the top of the speaker are used to control these levels.
- The speaker has a wired microphone input, connect the a microphone.
- The speaker has Audio output sockets, so you can output the sound the speaker produces to a Stereo or Hi-Fi system.
- The speaker has mono Line input for any audio source.

NOTES:

- Average transmission distance is 30m
- Red light will illuminate while in charge and once charge is complete, the lights will turn off
- Never charge the unit longer than 10 hours
- Never attempt to modify or open any part included with this kit