

TROUBLESHOOTING

1.No sound

- 1.1.The indicator lights are not being on: Please charge the receiver or change the batteries of hand-held MIC;
- 1.2.Please try to pair the wireless frequency manually.

2.With distinct howling

- 2.1.Please do not point the microphone toward the speaker and the distance between microphone & speaker should be about 3M;
- 2.2.Please turn down the volume to avoid howling in a small room.

SPECIFICATIONS

Microphone Type:	Omni-Directional
UHF Frequency:	520-526MHZ
Transmission Distance:	Up to 40m
Receiver Output:	6.5mm
Frequency response:	30Hz-20KHz
Sensitivity:	-54dB(+/-3dB)
Working Time:	Up to 9 Hours(Microphone) Up to 5 Hours(Receiver)
Charging Time:	3-4 Hours
Batteries:	2*AA(Microphone) Li-Ion 3.7V,550mAh(Receiver)
Dimensions:	250(L)*54(Dia)mm(Microphone) 105(L)*36(W)*19(H)(Receiver)

DISTRIBUTED BY:

TechBrands by Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere NSW 2116 Australia
Ph: 1300 738 555 Int'l: +61 2 8832 3200 Fax: 1300 738 500
www.techbrands.com
Made in China



Portable UHF Microphone Headset System

User Manual

AM-4134

WARNING

1. Please don't put the product and accessories nearby fire or other hot environments.
2. Please don't put the product and accessories near water or damp places.
3. Please don't open or tear down the battery compartment. It may cause an explosion if the battery is replaced improperly. Avoid putting the battery in water, fire or near a hot environment.
4. This product needs to use the supplied power adapter (DC5V, 500mA) to charge. Once fully charged, you should remember to unplug the power cord or power socket.
5. If you don't need to use the unit, hold down the power switch more than 3 seconds to power off.
6. Please turn off the product in flammable and combustible areas.

FEATURES

1. Adopts UHF wireless technology --- long wireless transmission distance;
2. Adopts SHIDU acoustic amplification electroacoustic system;
3. Supports one wireless hand-held microphones to work at the same time;
4. Built-in polymer battery with high capacity --- safety & long life time;
5. Suits for any audio devices with 6.5MM MIC in function to realize wireless amplification.

UHF wireless MIC operation:

1. Switch ON / OFF
Long press "w" to switch on and there will be UHF frequency point by default shows on the screen.

Please insert the wireless receiver into the speaker to amplify voice.

Long press "w" to switch off and the screen will go out.

2. Pair the UHF wireless MIC manually
(This operation is suits for: no sound from the MIC)

2.1. Switch on the wireless hand-held MIC and twist off the shell; then press "▲" & "▼" at the same time for 3s, screen will shows "M"
2.2. Switch on the receiver and press "w" wireless pairing key for 3s, then it will enter into pairing status with blue indicator light flashing; Pairing is successful with screen of hand-held MIC and blue indicator light on the receiver being on all the time.
2.3. After paired successfully, please insert the wireless receiver into the MIC port of speaker to amplify (amplify voice, Karaoke, etc.)


3. Battery indication of UHF wireless MIC
In working status, it has sufficient battery, power with "■" indication showed on screen; it's low battery with "■" indication showed on screen and please change the battery timely.

Note:
Please open the battery cover properly and put the batteries. (Please note the positive & negative anode.)

Please take out the batteries if don't use within a long time.

- Caution:**
1. Screaming. Keep the speaker far away from the microphone; keep the distance between audio device and MIC longer than 60cm.
 2. In a small room, please turn down the volume to avoid screaming.
 3. Please recharge the device timely if low battery. The device must be fully recharged every 2 months when they aren't used.
 4. Original accessories are suggested if they need to be replaced.
 5. Non-professional technician is not allowed to dismantle or repair the product; please contact a local agent if there is any question or service requirement.
 6. The receiver & wireless MIC should be kept in normal temperature, fire and other hot environment should be avoided.
 7. The receiver & wireless MIC should be kept in dry and ventilated environments. Rain and water should be avoided.

Function Illustration: How to operate the wireless receiver:

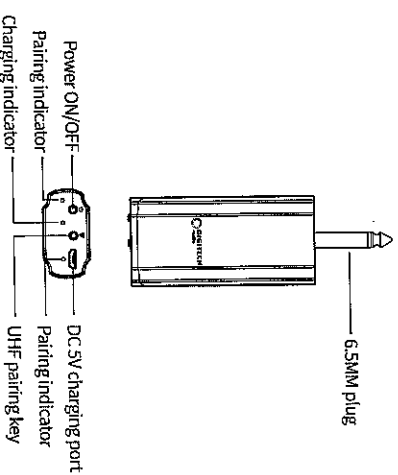

1. Power ON / OFF
Press "w" for 3s and it's powered on with green indicator light being on all the time. Press "w" 3s again and it's powered off with green indicator light going out.

2. Pairing

2.1. Switch on the wireless hand-held MIC and twist off the shell; then press "▲" & "▼" at the same time for 3s, screen will shows "M"
2.2. Switch on the receiver and press "w" wireless pairing key for 3s, then it will enter into pairing status with blue indicator light flashing; Pairing is successful with screen of hand-held MIC and blue indicator light on the receiver being on all the time.
2.3. After paired successfully, please insert the wireless receiver into the MIC port of speaker to amplify (amplify voice, Karaoke, etc.)

3. DC 5V charging port

Please switch off the receiver before charging. Use the charger with DC 5V output connects with Micro-USB cable to charge the receiver. The red indicator light will be on all the time when charging and it will go out after fully charged.
Please connect the packed USB charging cable with the USB port of DC 5V (1A ~ 1.5A) charger.

Note:

- 3.1. Normally, charging time is 3~4 hours;
- 3.2. We suggest fully recharge the receiver before you using it at the first time;
- 3.3. Please unplug the charger as soon as it is fully charged.