



Bottom view

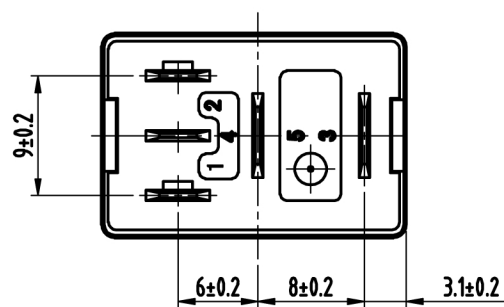

Wiring Diagram



Nominal Voltage	24 Vd. c.
Coil Resistance	$385 \pm 10\% \Omega$
Parallel Resistor	2700 $\Omega$
Pick-up Voltage	$< 14.4$ Vd. c. ( $20^\circ\text{C}$ )
Drop-out Voltage	$> 2.4$ Vd. c. ( $20^\circ\text{C}$ )
Contact Material	$\text{AgSnO}_2\text{In}_2\text{O}_3$
Contact voltage drop	$< 100$ mV (13.5 Vd. c., 10 A)
Contact Rating	NO/NC 30/20A, 27Vd. c. (Res. load)
Electrical life	$1 \times 10^5$
Mechanical life	$1 \times 10^7$
Insulation Resistance	$> 100$ M $\Omega$ , 500 Vd. c.
Dielectric Strength	500 Va. c., 1 min
Ambient temperature	$-40^\circ\text{C} \sim 125^\circ\text{C}$
Cover color	Black
Termination	Plug-in

Type MC3	Date	2007·07·18	PROJECTION 	TITLE <b>SY4047</b>	
	Design	zhuweisi			
	Check	chenminxiao	SCALE 2:1		
Size	A3	Approve	huzhongrui		