

UHF Wireless Microphone



Model:
AM4184



Please read and save all instructions to ensure safe and effective use of this product.

Instruction Manual

System Features:

- UHF Band Microphone System
- Operation Range: Up to 160' + ft.
- LED Digital Display Readout Screens
- Simple Setup & Hassle-Free Operation
- AF & RF Audio Transmission Signal Strength Indicators
- Independent & Adjustable Channel Volume Controls
- Selectable Frequency Range: Up to (8) Channels
- 1/4" Audio Output Jack
- XLR Balanced Output Jack



What's in the Box:

- Receiver Base
- Beltpack Transmitter
- Headset Microphone
- Lavalier Microphone
- Power Cable
- (2)xAA Batteries
- Audio Receiver Adaptor 6.3mm to 3.5mm

Receiver Specs:

- Signal/Noise Ratio: -105dB
- Border Upon Channel Rejection: >70dB
- T.H.D.: < 1%
- Audio Output Level: 0-300 mV
- Dimensions 6.8 x 5.3 x 1.7 in
- Power Supply: DC 5V (Type-C USB Power Adapter)

Transmitter Specs:

- RF Output: >10 dBm
- Modulation Type: FM
- Max Deviation: ± 40 KHz
- Spurious Emission: > 55 dBc
- Nominal Current Drain: < 40mA
- Battery Powered, Requires (2) x 'AA' Batteries -Each

Please read this manual carefully before use and strictly follow the instructions for operation and storage. Keep it for future reference.

The wireless system offers reliable performance, portability, and easy operation, suitable for home, school, training rooms, and outdoor performances. Utilizing advanced intelligent digital technology and highly integrated circuit design, it ensures strong stability, intelligence, and high efficiency.


FEATURES:

1. UHF frequency for enhanced anti-interference ability and stable transmission distance.
2. Transmitter with frequency modulation function to accommodate simultaneous use of multiple frequencies.
3. Receiver features automatic frequency lock design, simplifying operation.
4. Mini receiver design with a 6.35mm standard audio plug for convenient plug-and-play.
5. Receiver includes rechargeable function, circuit protection technology, and a detachable, large-capacity lithium battery. It can also be connected to a power bank for extended offline use.
6. Easy to operate, user-friendly, providing a satisfying experience.

RECEIVER FUNCTION DESCRIPTION


1. 6.35mm audio plug
2. Power switch
3. Power indicator, charging indicator
4. DC 5V charging port
5. RF signal indicator
6. Antenna
7. 18650 lithium battery negative electrode*
8. 18650 lithium battery compartment
9. 18650 lithium battery positive electrode*

Note: Be sure to confirm the positive/negative orientation of the battery before installation to avoid damage to the receiver. Please fully charge the lithium battery before use.

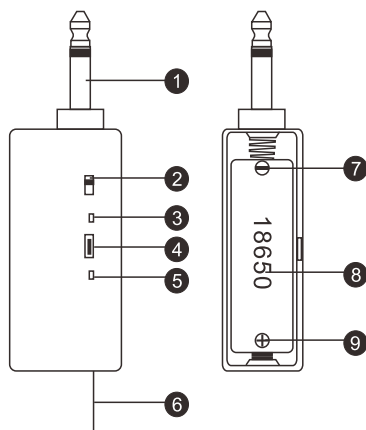

BODYPACK TRANSMITTER

1. Antenna
2. Volume Adjust and ON/OFF button
3. Microphone Connector
4. CH Button DOWN
5. CH Button UP
6. LED Display
7. Battery compartment Double AA batteries (AA 1.5VX2)
8. Headset microphone (Lavalier microphone)

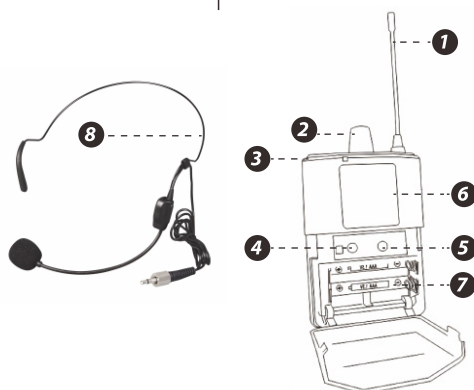

OPERATION

Tips: Under normal circumstances, the product has been completed at the factory and can be used normally after opening the box, no need to adjust the frequency. If you need to adjust the frequency, please press "▲" or "▼" CH button in transmitter.

How to Lock the Bodypack Transmitter and Receiver

1. Turn **ON** the receiver.
2. Press and hold the "▲" CH button and turn ON the power switch button to "**ON**" at the same time until the LED display flashes for 4 seconds, then release the "▲" button.
3. The receiver will be locked with the transmitter automatically.
4. Short press the transmitter "▼" CH button to confirm the connection between the transmitter and the receiver. At this time, the transmitter display stops flashing, and the receiver RF signal indicator is always ON, indicating that the receiver and the transmitter are locked successfully.

WARRANTY INFORMATION

Our product is guaranteed to be free from manufacturing defects for a period of 12 Months.

If your product becomes defective during this period, Electus Distribution will repair, replace, or refund where a product is faulty; or not fit for intended purpose.

This warranty will not cover modified product; misuse or abuse of the product contrary to user instructions or packaging label; change of mind and normal wear and tear.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

To claim warranty, please contact the place of purchase. You will need to show receipt or other proof of purchase. Additional information may be required to process your claim.

Any expenses relating to the return of your product to the store will normally have to be paid by you.

The benefits to the customer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods or services to which this warranty relates.

This warranty is provided by:

Electus Distribution

Address 46 Eastern Creek Drive, Eastern Creek NSW 2766

Ph. 1300 738 555