QM3742

NEXTECH



Wired Reversing Camera with 7" LCD

Instruction Manual

MONITOR:



1	Dimmer Sensor	5	Power Button	9	R/C Window
	Window	6	Channel 1	10	AV-IN
2	Down Button	7	Channel 2	11	Bracket Knob
3	Menu Button	8	Channel 3		
4	Up Button				

CAMERA:

- QC3536: 12V Infrared Reversing Camera with Mounting Bracket
- CCD, 120° Viewing Angle
- High Resolution Camera



MONITOR SPECIFICATIONS:


Display:	7"	
Aspect Ratio:	16:9	
Luminance:	300cd/m ²	
Resolution:	800 x 480 RGB	
Audio & Video:	3 ways video input, 2 ways audio input, 1 AV input from the front panel	
System:	PAL/NTSC (Automatic)	
Voltage:	12-24V DC	
Language:	English, Chinese	
OSD Menu:	Display menu, Brightness, Colour and Contrast adjustments	
Built-in Speaker:	Yes	
Bracket Accessories:	U type bracket	
Sunshade:	Included and removable	

CAMERA SPECIFICATIONS:

Sensor:	SHARP 1/4 CCD	
Resolution:	420 TV Line	
Illumination:	0.5Lux IR night vision	
Viewing Angle:	120°	
Images:	Mirror & Original image	
System:	PAL/NTSC	
Waterproof Class:	IP68, Aluminium alloy shell	
Anti-shock Class:	4G	
Power Supply:	12V-24V DC	
Maximum Current:	<250mA	
Connector:	4 pin/RCA	
Working Temperature:	-30°C to 70°C	
Dimensions:	86.5(W) x 77(H) x 75(D)mm	


CONNECTION:


4 Pin (7")

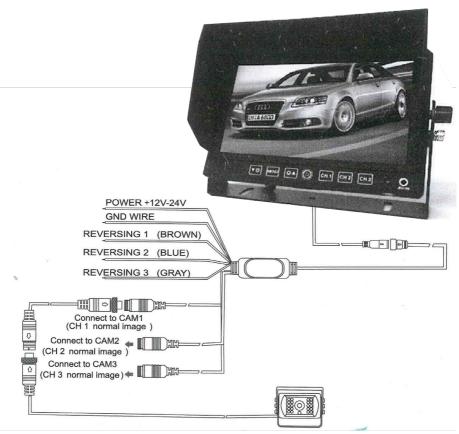


MONITOR STANDARD INSTALLATION:


1. Remove the screws from the side. Place the U-bracket where desired and lock with screws as shown in the pictures.







2. Place the monitor onto the U-bracket and tighten with screws.





3. Once the installation is completed, the monitor can be tilted 30° up or down.



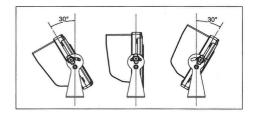

BOX CONTENTS:

1.Hexagon wrench *1	2.User manual *1
	ree name
3.Power cable*1	4 .4pin with adaptor leads *1
5 .AV-IN Cable*1	6.Sun shade *1
7.Bracket Accessories*1	

NOTES:

Distributed by: Electus Distribution Pty. Ltd. 320 Victoria Rd, Rydalmere NSW 2116 Australia

www.electusdistribution.com.au

Made in China