


PIN OUT:

DB9F	4P4C		
1+8	1	YELLOW	
2	2	RED	
3	3	BLACK	
5	4	BLUE	

4+6 (IN DB)

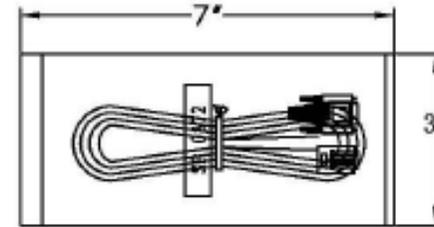

**MATERIAL LIST:**

NO.	P/NAME	DESCRIPTION	Q'TY
1	CABLE	NO-UL 28AWG*4C FLAT CABLE OD: 2.5*5.0 ± 0.10 BLACK (B792)	1
2	CONN.	DB9P FEMALE INSULATION BLUE	1
3	CONN.	RJ11 4P4C PLUG PIN=G/F	1
4	PVC	LD PE	3g
5	PVC	45P BLACK (B792) PVC	20g
6	SCREW	#4-40 E4*30.5 BLACK (B792) SCREW	2
7	PACKING	06*3"*7"	

**INSPECTION:**

1. Verify and check that all materials used are correct.
2. Verify that the lengths /or measurements and solderability are acceptable and correct as per sample or drawing.
3. Verify that the finished assembly is free from any damages.
4. Conduct inspection and test all cable assemblies.



Soanar Head Office  
Level 1, 39 Hewish Road, Croydon  
Melbourne, Victoria 3136

Soanar - NSW  
320 Victoria Road  
Rydalmere, NSW 2116

Description  
1/190201 Assy Cble DB09F to RJ4

Compiled by  
SFS

Issue Date  
16/06/2011

Issue No.  
00

No. of Pages  
1 OF 1

Revisions:  
INITIAL DRAFT ONLY

This drawing is for quoting purposes only and may subject to change by the Manufacturer and/or the customer

Part Number  
CAB12335

SCALE  
NTS