



10W Rechargeable LED Work Light

User Manual


SL-2858



Box Contents:

- 1 x 10W Rechargeable LED Work Light
- 1 x USB Charging Cable

Product Diagram:

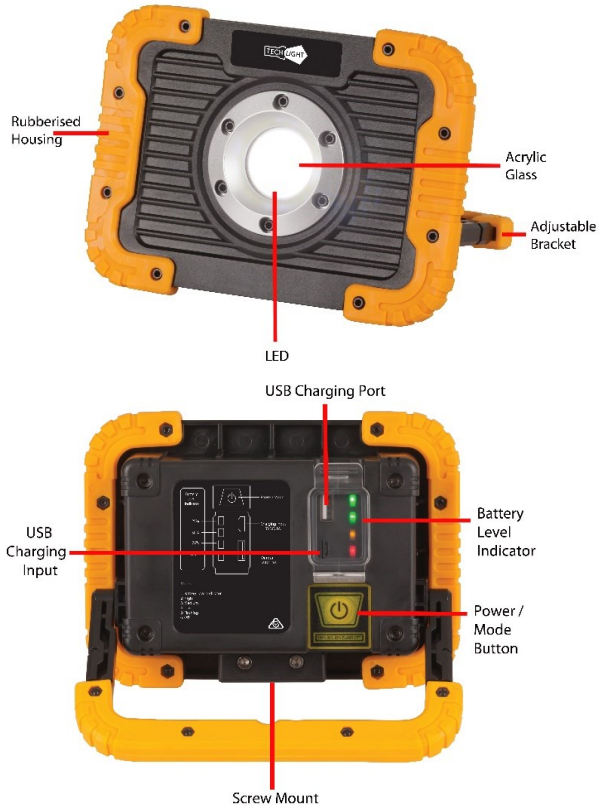

Charging:

1. Connect the USB cable provided to the USB charging input on the back of the work light.
2. Connect the USB plug to a USB mains power adaptor (not included) or a USB charging port on a computer.
3. Charging will take between 5 and 10 hours depending on if you're using a 5VDC, 1A power supply or a computer USB port which is only 500mA.
4. The battery level indicator will have all 4 LEDs displayed when fully charged, you can now disconnect the USB charging cable.

Modes:

Press the power/mode button to use each of the modes on the work light.

- | | |
|----------------------------|-------------|
| 1. Battery Level Indicator | 4. Low |
| 2. High | 5. Flashing |
| 3. Medium | 6. Off |

Safety:

1. Place the LED work light in a well ventilated area and keep a distance of at least 0.5m if placed near a wall.
2. Do not open the equipment or touch any of its internal parts.
3. Do not expose the charging input socket or cable to water or any other liquids.

Specifications:

LED: 10W COB

LED Colour: Cool White

Lumens: 1000

Burn Time: 3hrs (High)

6hrs (Medium)

9hrs (Low)

3hrs (Flashing)

Charging Time: 5hrs @ 1A

Charging Input: 5VDC, 1A

Battery: Li-Ion 3.7V, 4400mAh

USB Charging Port: 5VDC, 1A

IP Rating: IP54

Protection: Charge & Discharge

Dimensions: 172(W) x 127(H) x 46(D)mm

Distributed by:
TechBrands by Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere
NSW 2116 Australia
Ph: 1300 738 555
Int'l: +61 2 8832 3200
Fax: 1300 738 500
www.techbrands.com