
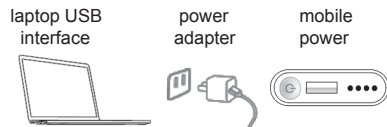



②Charging instructions




③Parameter

Bead quantity: 20pcs 3000K warm white,
20pcs 6500K cold white
CCT: stepless dimming(switch among
3000K-4000K-6000K)
Power: 2.5W
Warranty: 2 years
luminous flux: 200LM
Battery Type: 3.7V 2000mAh Lithium
Battery
Charging Time: 2 hours get 90% power,
3 hours get 100%
Run Time: 4-10(high-light level-50%
level)
Charge indicator: under charging turn to
red color, finished charging turn to green
color
Interface spec: DC3.5V
Waterproof grade: IP20
Material: Iron+ABS plug


Notices:
1. Do not take apart and change interior
parts by yourself
2. Do not look straight under strong light
state in case of eye damage
3. Do not put lamp under high temperature
and moist environment
4. Do not spray any liquid to lamp and put
it together with flammable material
5. Do not charge for too long, cut off power
when you leave.

④Operating Guide

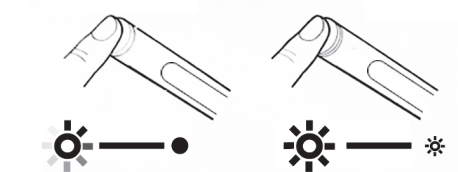

Switch Position: one end with switch sign
on the plastic plug

Short touch:
First touch: 40pcs beads light up with 4000K
(natural white)
Second touch: 20pcs beads light up with
6500K(cold white)
Third touch: 20pcs beads light up with 3000K
(warm white)
Fourth touch: goes into SOS flashing mode
Fifth touch: back to ready mode until next
touch for the next cycle
Long press: under lighted state, take a long
press will achieve stepless dimming. If you
take a short touch, the brightness still keep
the same level of last one

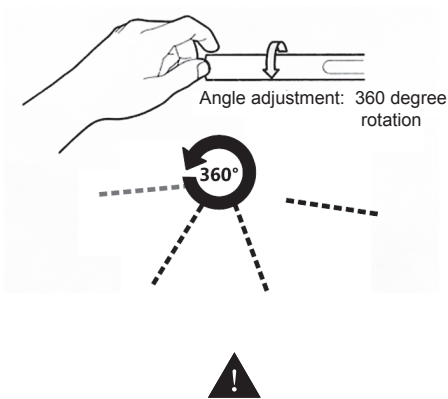

Notices:
1.For wall mounted, try to put baseholder
in the middle of the lamp
2.For ceiling mounted, try to put baseholder
close to battery part as it's heavier than the
other side so as to keep gravity balance
3.Avoid violent shaking in case of falling
caused by gravity imbalance

⑤Installation

A. Magnet




Please ensure adsorbed iron material have
enough density, otherwise, the lamp might
fall caused by short weight; If the adsorption
surface is curved, the lamp might fall as the
incomplete absorb surface result in weakness
suction.

C. Screw



Pay attention to
screw in place.
Please prepare your own cross screwdriver
and tighten it up in the right position.

B.3M double-side tape



Adjustable light direction
Please ensure pasted surface keep smooth,
dry, free of oil and dirt in case of falling.
Stick one side to baseholder and press hard
for 2minutes, tear off the other side and paste
it where you want and give another 2 minutes
hard press.

⑥safety tips

1. Do not charge with output voltage > 5V, otherwise, the
main control IC might be destroyed, which will lead to circuit
board protection functions fails and damage battery.
2. Do not charge with current > 2A.
3. If charge with light on state, ensure keep bightness level
≤90% to avoid full load operation effect product function, and
try not charge > 2 hours with light on state.
4. Do not charge for long time, please cut off power if charged.
5. Any interior parts are not allowed to be taken apart, fixed and
replaced; do not put lamp under high temperature and moist
environment and put it together with flammable material

Distributed by:
TechBrands by Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere
NSW 2116 Australia
Ph: 1300 738 555
Int'l: +61 2 8832 3200
Fax: 1300 738 500
www.techbrands.com
Made in China



Portable Multipurpose
Cabinet Camping Light
SL3519
User Manual