

240605



TEL: +0086-0755-23987110

Http: www.twotrees3d.com

E-mail: service@twotrees3d.com

Facebook: <https://www.facebook.com/twotrees3d>

Address: Room 402, Building 11, No.9 Qilin Road, Nankeng Community,
Bantian Street, Longgang District, Shenzhen, Guangdong, China, 518000



WARNING INJURE HAND



NOTICE DUST PREVENTION



ARNING DANGER



PRODUCT MANUAL

Vacuum Cleaner For CNC Router (Dust Monster M1)



Compatible Models: TTC450 / TTC450 Pro




Note: The picture is for reference only, the actual product shall prevail


List of accessories




Dust box X1




Transparent magnetic suction nozzle head X1



Flat Nozzles X1




Corrugated tube 1.2MM X1



Filter cartridge X2



2.5 Hexagonal wrench X1




Vacuum cleaner-specific data cable X1




Nylon ties X10


List of accessories




Dust bag X2




Brush head 50MM X1




Brush head 25MM X1



Sleeve Adapters X2



Adapter X1



M4X16 Semicircular head screws X4

Step1



1. Place the 500 watt spindle in the fixture, align the end of the spindle with the hole in the top cover of the clear magnetic suction nozzle head and secure it with a semi-circular head M4X16 screw.

Use:

Transparent magnetic suction nozzle head top cover X1

M4X16 Semicircular head screws X4

2.5 Hexagonal wrench X1

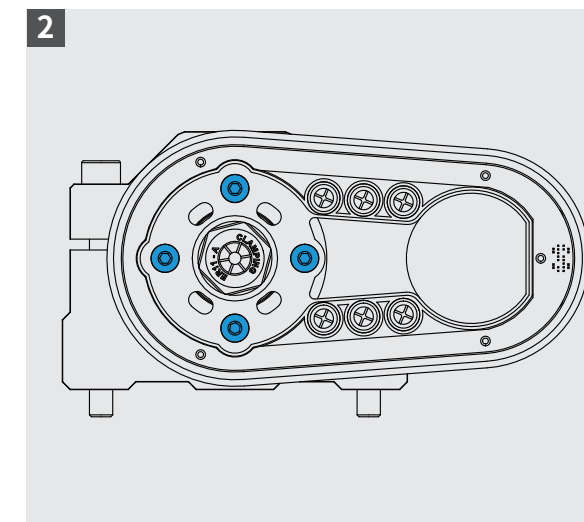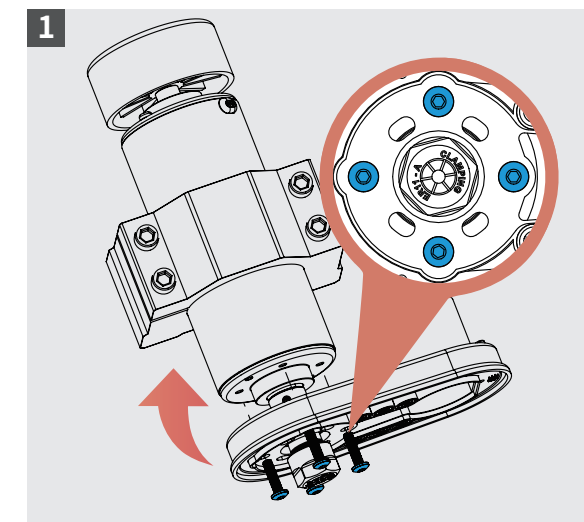

Step2


1. Remove the 775 spindle, align the spindle end with the hole in the top cover of the clear magnetic suction nozzle head, and secure it with the M4X16 semi-circular head screw.

Use:

Transparent magnetic suction nozzle head top cover X1

M4X16 Semicircular head screws X2

2.5 Hexagonal wrench X1

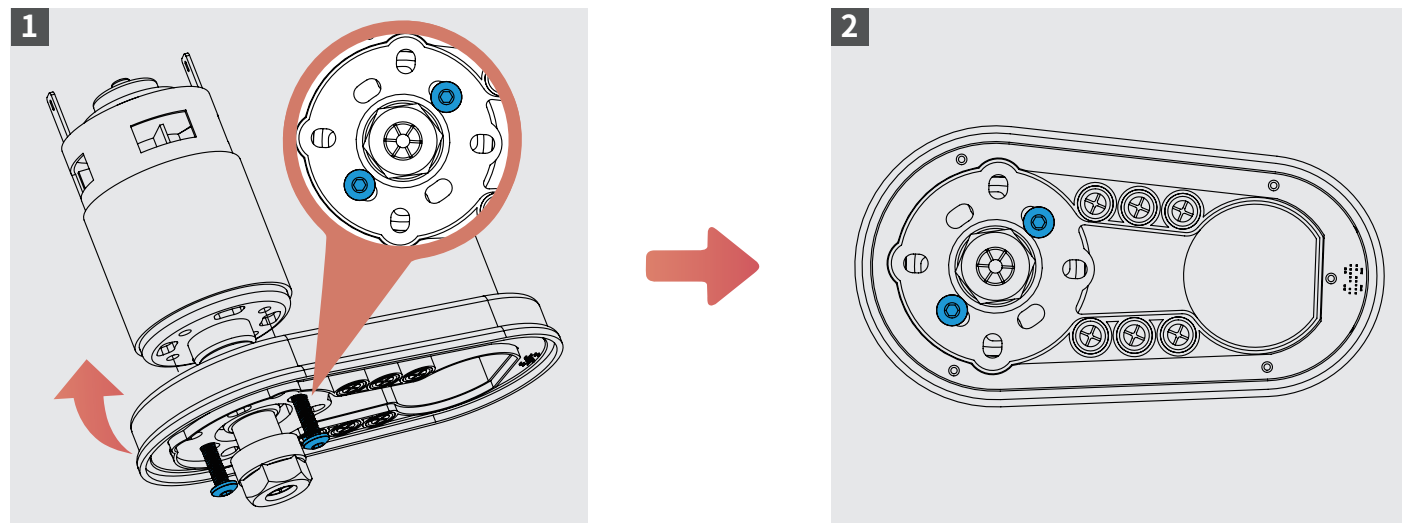


Step3

1. The lower cover of the transparent vacuum head fits the upper cover of the transparent vacuum head.
2. Align the sleeve adapter with the holes on the transparent vacuum nozzle.

Use:

Transparent magnetic dust head bottom cover X1

Sleeve Adapters X1

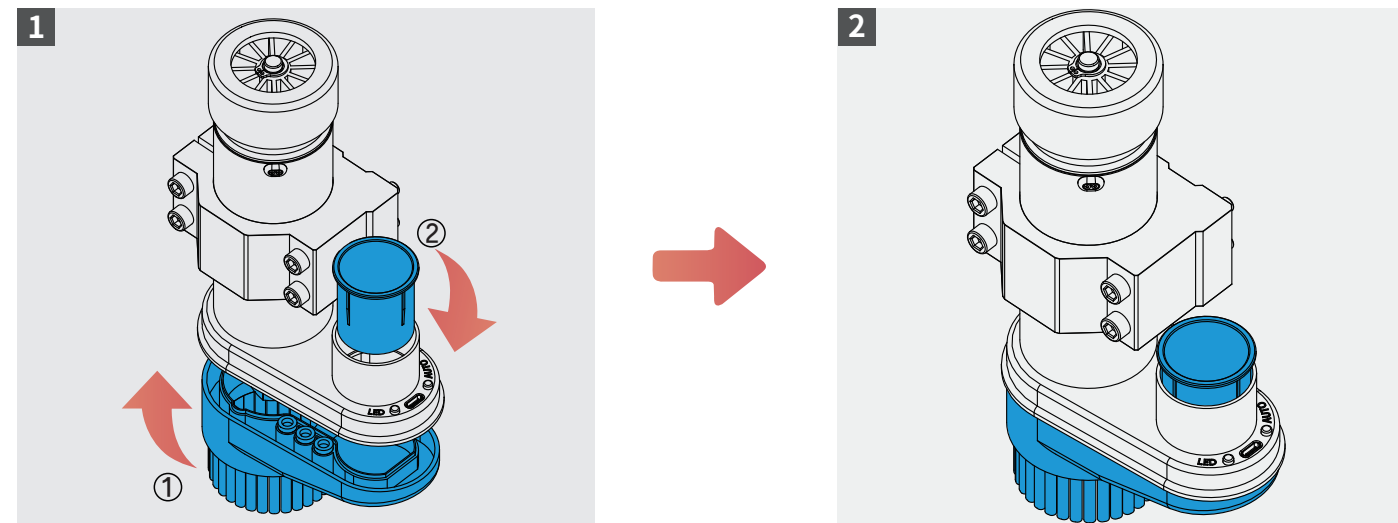


Step4

1. Align the corrugated tube with the holes on the top cover of the transparent magnetic vacuum cleaner head, then align the vacuum cleaner's dedicated data cable with the Type-C port.

Use:

Corrugated tube 1.2MM X1

Vacuum cleaner-specific data cable X1

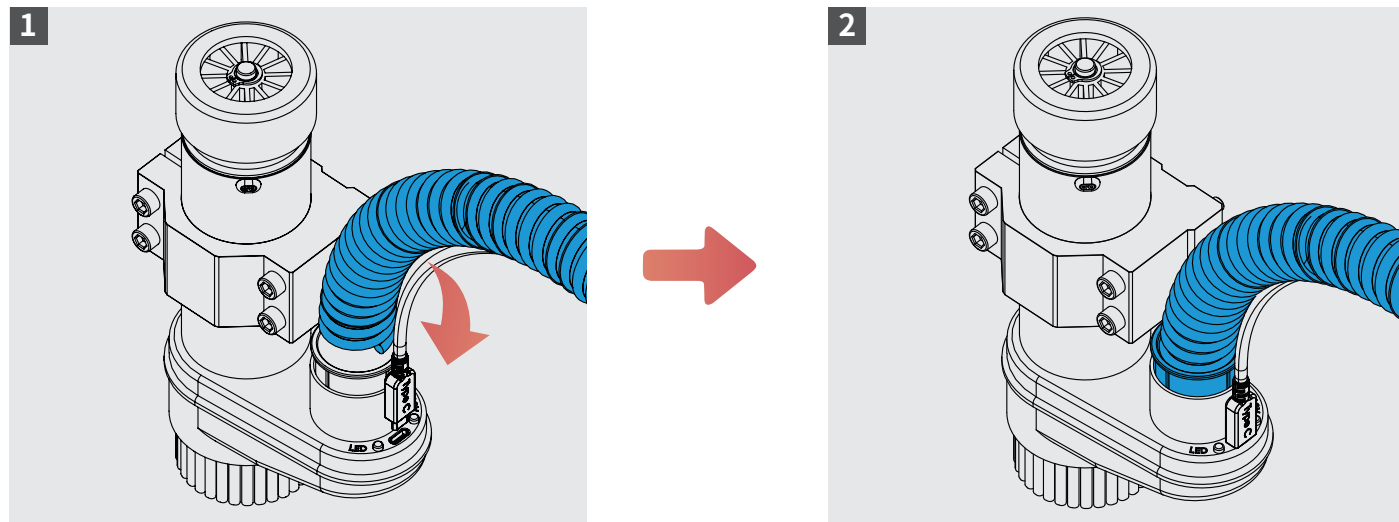

Step5


1. Once the dust bag is expanded, align the holes in the dust bag with the corresponding holes in the bucket lid.
2. Sleeve aligns with hole in bucket lid

Use:

Dust box X1

Dust bag X1


Sleeve Adapters X1

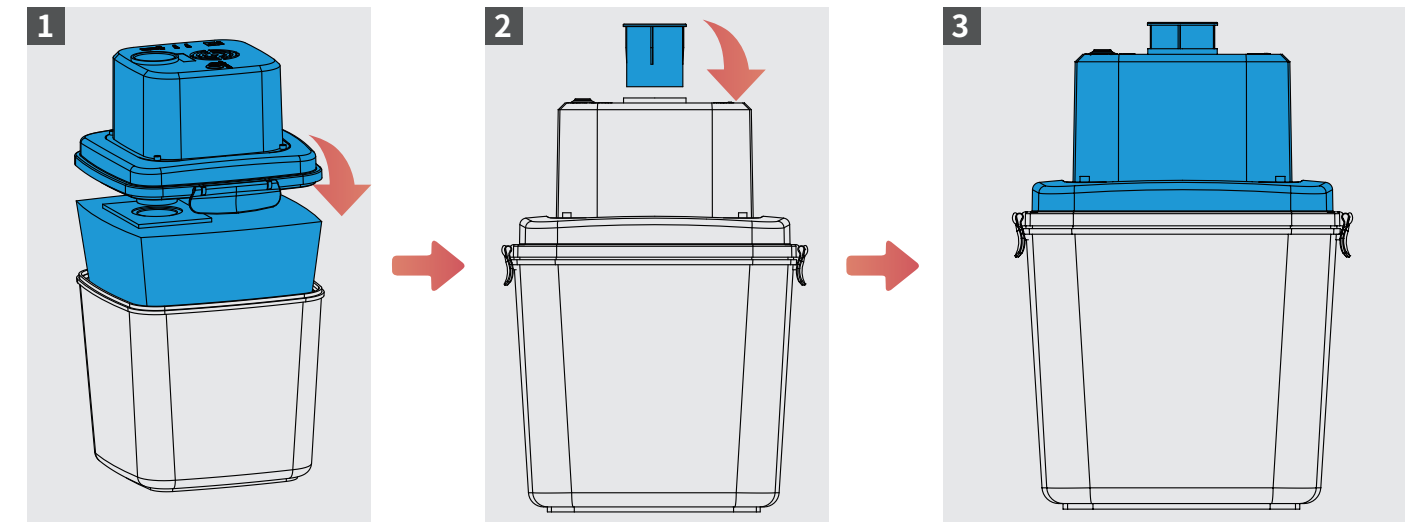

Step6

1. First install the bellows, Next, install the USB cable

Use:
Corrugated tube 1.2MM X1
Vacuum cleaner-specific data cable X1

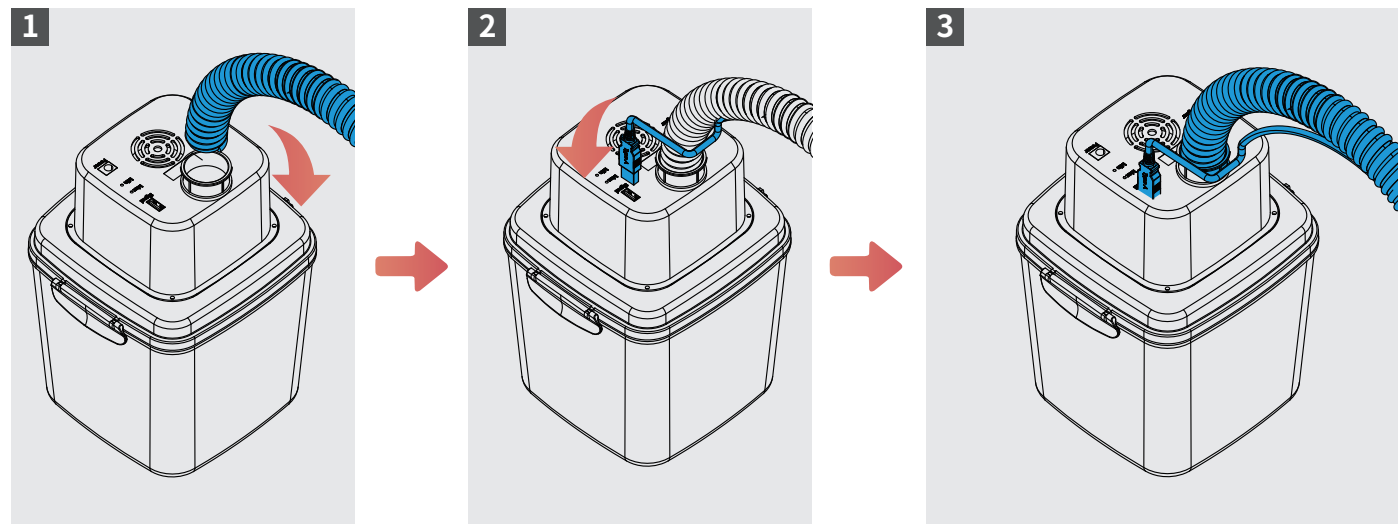


Step7

1. After installing all the sequences, simply connect the power supply and press and hold the auto start-stop

A gentle reminder:

1. If the switch on the top of the shell is pressed, the automatic start and stop function will be disabled.
2. The auto-start function has been disabled, Please unplug the power cord and plug it back in.
3. Press the transparent magnetic suction head to start and stop automatically.

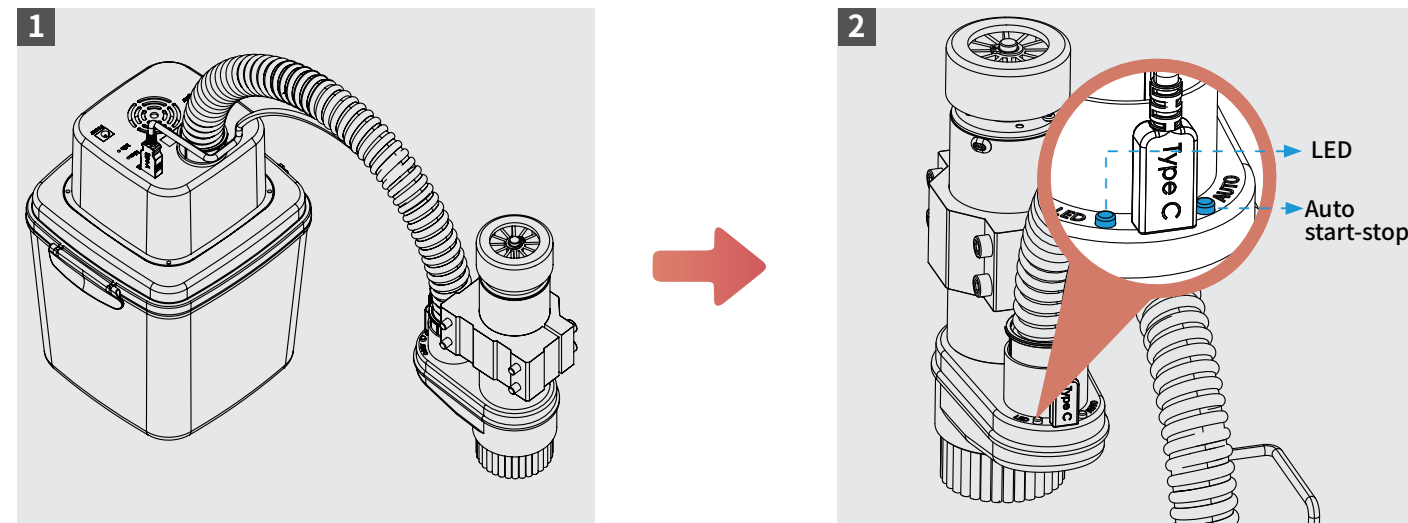


Precautions

1. The motor is equipped with overheating protection and will stop working automatically when the temperature is too high.
2. If the dust collection bag is full of dust and air cannot be drawn in, the motor will also overheat and stop working.
3. Therefore, the dust bag needs to be cleaned regularly to ensure that the motor works properly.

Die Liste des Zubehörs




Staubbehälter X1




Durchsichtige magnetische
Staubsaugerdüse X1



Flachdüse X1




Wellrohr 1.2MM X1




Filterpatrone X2



Innensechskantschlüssel 2.5 X1




Staubsauger-spezifisches
Datenkabel X1




Nylon-Kabelbinder X10


Die Liste des Zubehörs




Staubbeutel X2




Bürstenkopf 50MM X1




Bürstenkopf 25MM X1



Hülsenadapter X2



Adapter X1



Halbrundkopfschraube M4X16 X4

Schritt1



1. Die 500W-Hauptspindel im Spannfutter fixieren, so dass das Ende der Hauptspindel mit dem Loch der transparenten Vakuum-Saugkopfabdeckung ausgerichtet ist, und mit Halbrundkopfschrauben M4X16 befestigen

Verwendung:

Abdeckung für transparente magnetische Staubsaugerdüse X1

Halbrundkopfschraube M4X16 X4

Innensechskantschlüssel X1

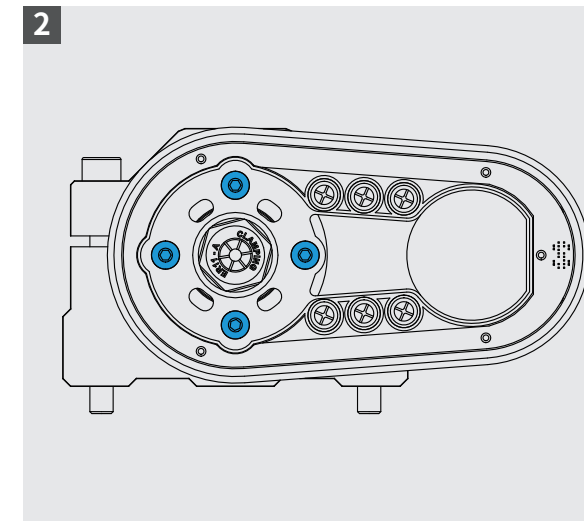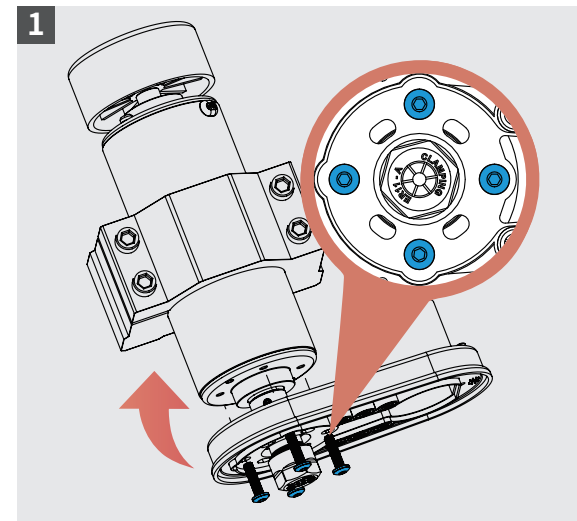

Schritt2


1. Entfernen Sie die 775 Hauptspindel, richten Sie das Ende der Hauptspindel auf die Löcher des transparenten Vakuumsaugkopfes aus und befestigen Sie sie mit Halbrundkopfschrauben M4X16.

Verwendung:

Abdeckung für transparente magnetische Staubsaugerdüse X1

Halbrundkopfschraube M4X16 X2

Innensechskantschlüssel X1

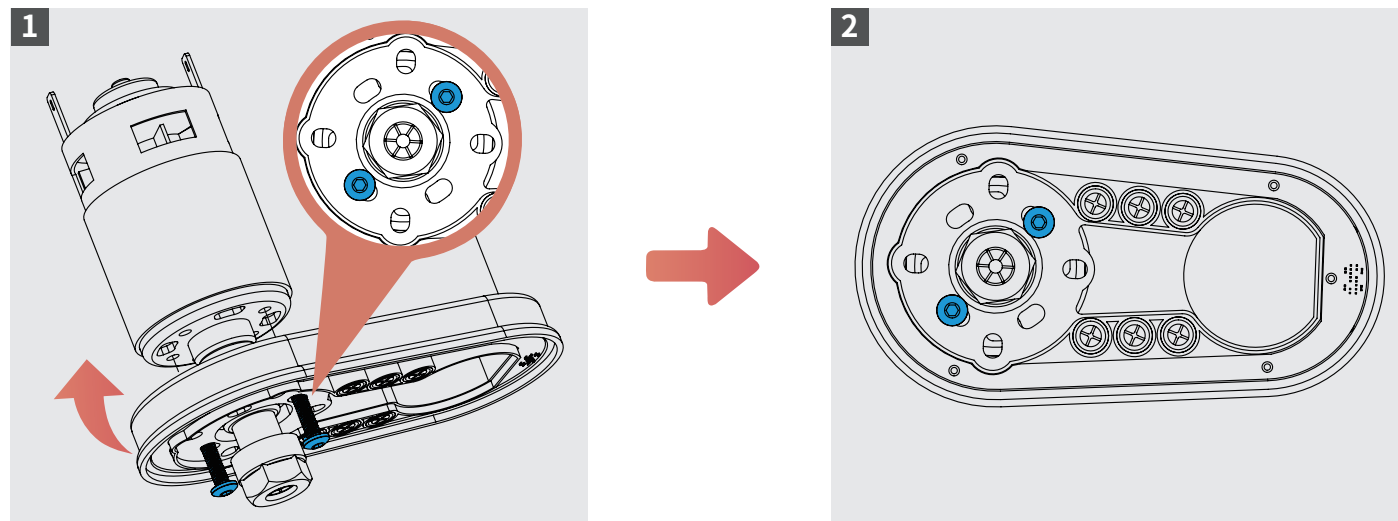


Schritt3

1. Die untere Abdeckung des transparenten Vakuumsaugkopfes passt zum oberen Deckel des transparenten Vakuumsaugkopfes.
2. Richten Sie den Hülsenadapter auf die Löcher des transparenten Vakuumsaugkopfes aus.

Verwendung:

Bodenabdeckung des transparenten magnetischen Staubschutzkopfes X1


Hülsenadapter X1

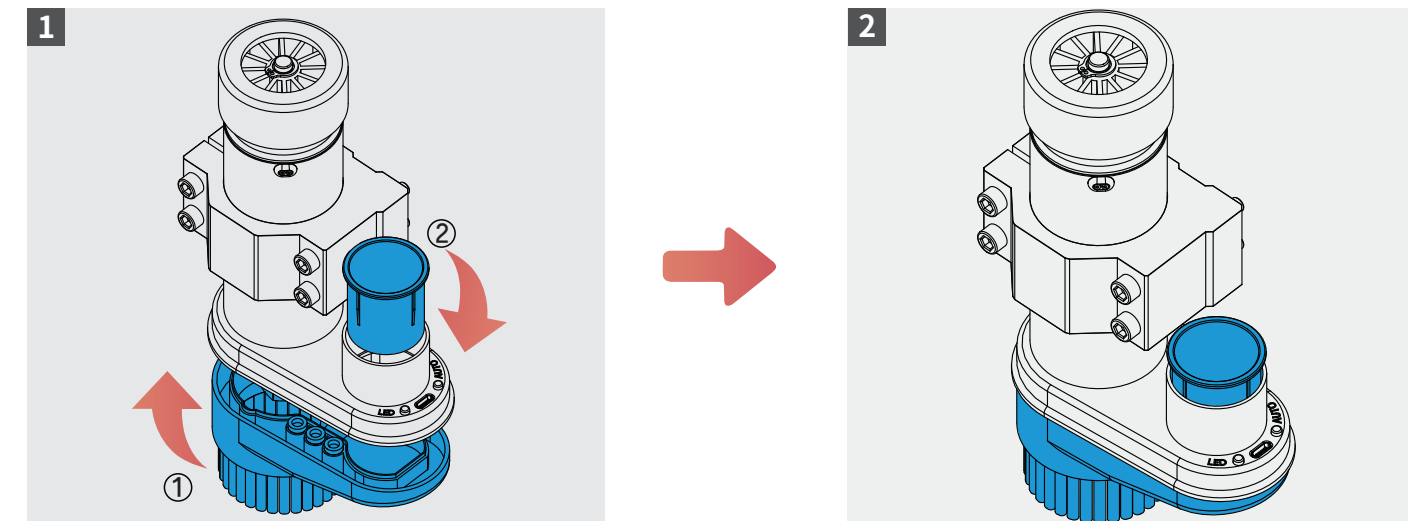

Schritt4

1. Richten Sie das Wellrohr auf die Löcher des oberen Deckels des transparenten magnetischen Staubsaugerkopfes aus und richten Sie dann das spezielle Datenkabel des Staubsaugers auf den Type-C-Anschluss aus.


Verwendung:
Wellrohr 1.2MM X1
Staubsauger-spezifisches Datenkabel X1

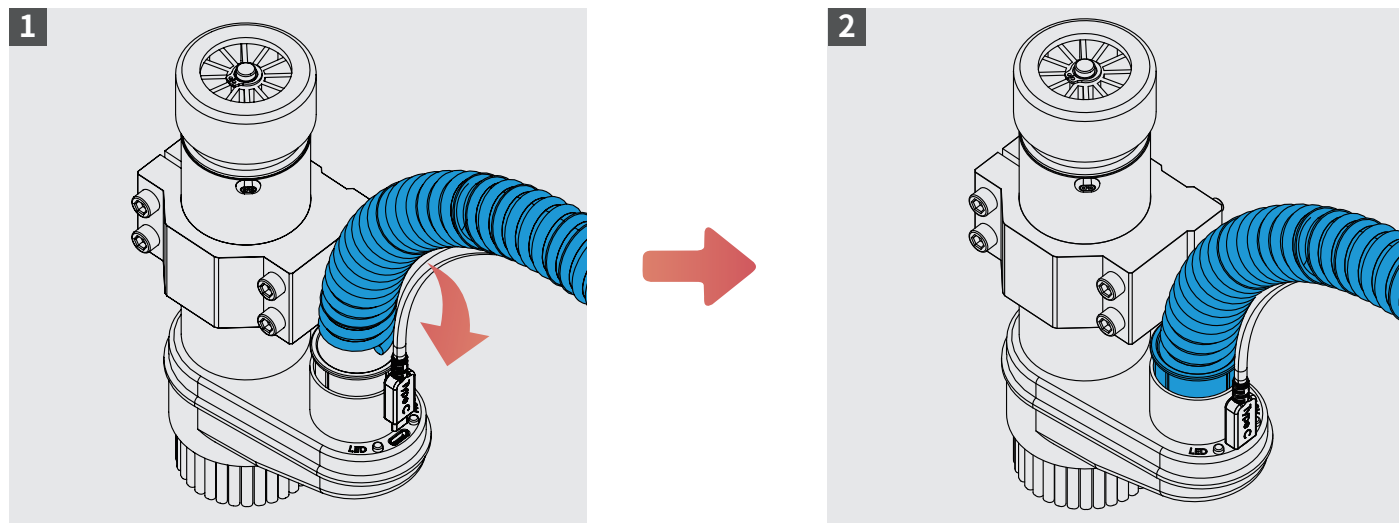

Schritt5

1. Nachdem sich der Staubbeutel ausgedehnt hat, richten Sie die Löcher des Staubbeutels mit den entsprechenden Löchern auf dem Eimerdeckel aus
2. Hülse passt zum Loch im Eimerdeckel


Verwendung:
Staubbehälter X1
Staubbeutel X1
Hülsenadapter X1

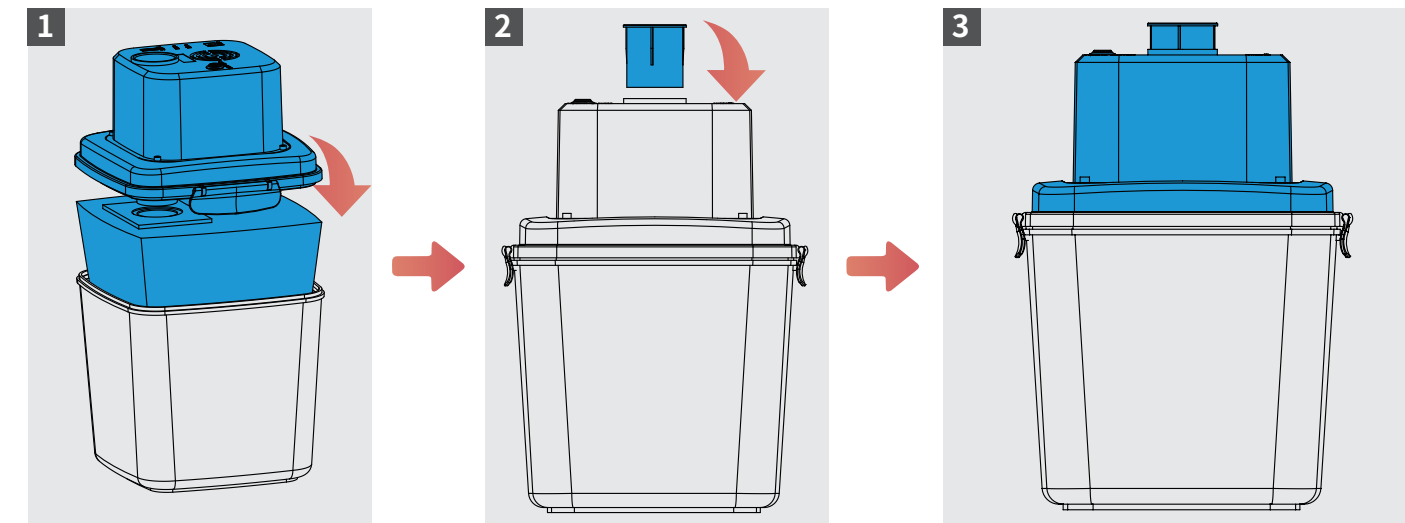

Schritt6

1. Installieren Sie zunächst den Faltenbalg, Installieren Sie nun das USB-Kabel

Verwendung:
Wellrohr 1.2MM X1
Staubsauger-spezifisches Datenkabel X1

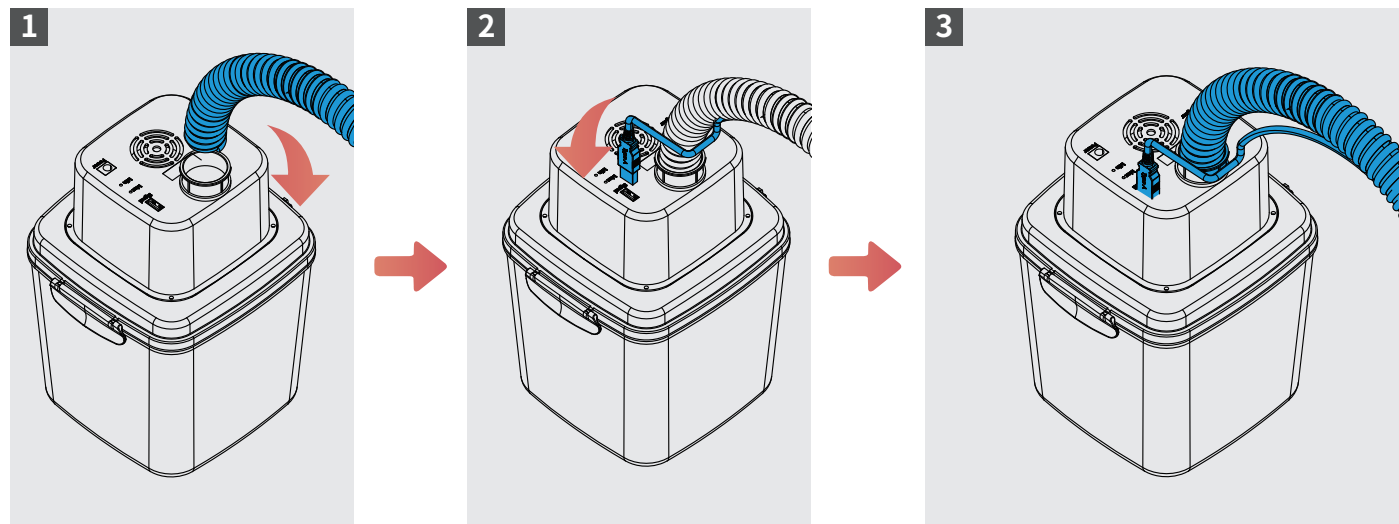


Schritt7

1. Sobald alle Sequenzen installiert sind, schließen Sie einfach die Stromversorgung an und drücken und halten Sie die Start-Stopp-Automatik

freundliche Erinnerung :

1. Wenn der Schalter oben am Gehäuse gedrückt wird, wird die automatische Start- und Stoppfunktion deaktiviert.
2. Die automatische Startfunktion ist ausgefallen. Bitte ziehen Sie das Stromkabel ab und stecken Sie es erneut ein.
3. Drücken Sie den transparenten magnetischen Saugkopf, um automatisch zu starten und zu stoppen.

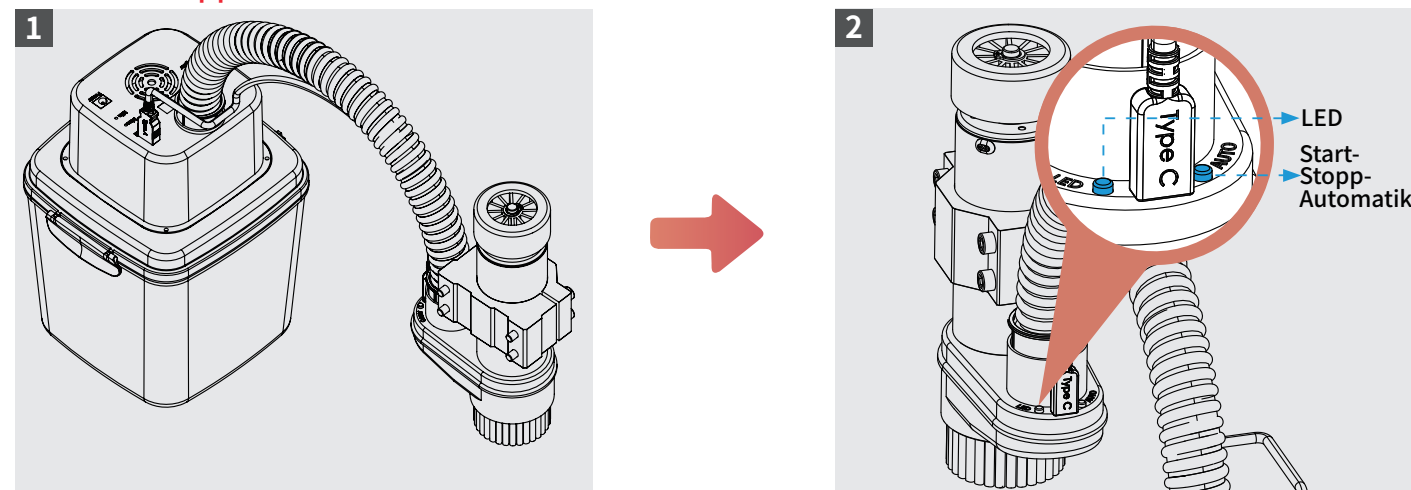

Hinweise

1. Der Motor ist mit einer Überhitzungsschutzfunktion ausgestattet und wird automatisch abgeschaltet, wenn die Temperatur zu hoch ist.
2. Wenn der Staubbeutel mit Staub gefüllt ist und keine Luft mehr ansaugen kann, wird der Motor ebenfalls überhitzen und die Arbeit einstellen.
3. Daher ist es erforderlich, den Staubbeutel regelmäßig zu reinigen, um den ordnungsgemäßen Betrieb des Motors zu gewährleisten.