




For Ages 6+

KJ-8970

# Electronic Project Snap-on Kit



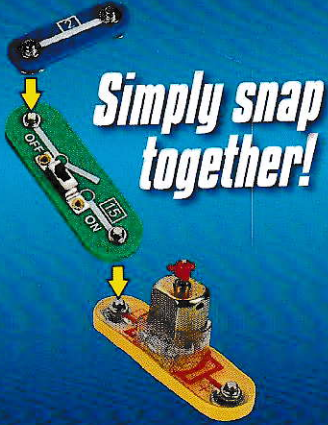

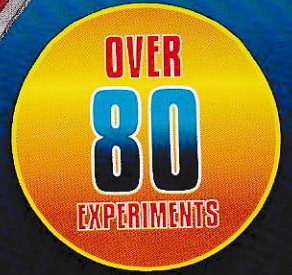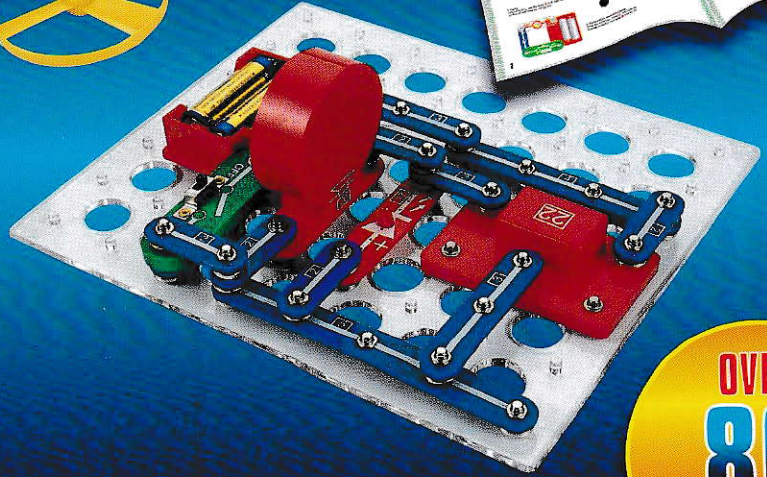













**Simply snap  
together!**




- Learn whilst building over 80 electronic experiments
- No tools or soldering required - quick and easy assembly
- Components simply snap together
- Includes full colour instruction manual

# Parts List

| Number | Description                    | Item  | Quantity | Number | Description                   | Item  | Quantity |
|--------|--------------------------------|---|----------|--------|-------------------------------|---|----------|
| 1      | One-Snap Connector             |  | 2        | 20     | Speaker                       |  | 1        |
| 2      | Two-Snap Connector             |  | 6        | 22     | Alarm IC (Integrated Circuit) |  | 1        |
| 3      | Three-Snap Connector           |  | 3        |        |                               |   |          |
| 4      | Four-Snap Connector            |  | 1        | 24     | Motor                         |  | 1        |
| 5      | Five-Snap Connector            |  | 1        |        | Magnet                        |  | 1        |
| 13     | Dry reed Switch                |  | 1        |        | Yellow Fan                    |  | 1        |
| 14     | Press switch                   |  | 1        |        |                               |   |          |
| 15     | Slide Switch                   |  | 1        |        |                               |   |          |
| 17     | Red LED (light emitting diode) |  | 1        |        |                               |   |          |
| 18     | 2.5V lamp                      |  | 1        |        |                               |   |          |
| 19     | Battery Unit                   |  | 2        |        |                               |   |          |

| PAGE     | EXPERIMENT  | PAGE     | EXPERIMENT  |
|----------|---|----------|---|
|          | 43 Sound of fire engine                                       |          | 67 Low sound of fire engine with light                      |
|          | 44 Sound of ambulance   |          | 68 Low sound of ambulance with light                        |
|          | 45 Sound of game machine                                      |          | 69 Low sound of game machine with light                     |
|          | 46 Sound of vibration   |          | 70 Low sound of vibration with light                        |
| Page 19: | 47 Magnet-controlled sound of police car                      | Page 23: | 71 Magnet-controlled low sound of police car with light     |
|          | 48 Magnet-controlled sound of machine gun                     |          | 72 Magnet-controlled low sound of machine gun with light    |
|          | 49 Magnet-controlled sound of fire engine                     |          | 73 Magnet-controlled low sound of fire engine with light    |
|          | 50 Magnet-controlled Sound of ambulance                       |          | 74 Magnet-controlled low sound of ambulance with light      |
|          | 51 Magnet-controlled sound of game machine                    |          | 75 Magnet-controlled low sound of game machine with light   |
|          | 52 Magnet-controlled sound of vibration                       |          | 76 Magnet-controlled low sound of vibration with light      |
| Page 20: | 53 Red-light alarming sound of police car                     | Page 24: | 77 Middle sound of police car with light                    |
|          | 54 Red-light alarming sound of machine gun                    |          | 78 Middle sound of machine gun with light                   |
|          | 55 Red-light alarming sound of fire engine                    |          | 79 Middle sound of fire engine with light                   |
|          | 56 Red-light alarming sound of ambulance                      |          | 80 Middle sound of ambulance with light                     |
|          | 57 Red-light alarming sound of game machine                   | Page 25: | 81 Magnet-controlled middle sound of police car with light  |
|          | 58 Magnet-controlled red-light alarming sound of vibration    |          | 82 Magnet-controlled middle sound of machine gun with light |
| Page 21: | 59 Magnet-controlled red-light alarming sound of police car   |          | 83 Magnet-controlled middle sound of fire engine with light |
|          | 60 Magnet-controlled red-light alarming sound of machine gun  | Page 26: | 84 Magnet-controlled middle sound of ambulance with light   |
|          | 61 Magnet-controlled red-light alarming sound of fire engine  |          | 85 Speedy flash lamp  |
|          | 62 Magnet-controlled red-light alarming sound of ambulance    |          | 86 Magnet-controlled speedy flash lamp                      |
|          | 63 Magnet-controlled red-light alarming sound of game machine |          | 87 Slow flash lamp  |
|          | 64 Magnet-controlled red-light alarming sound of vibration    |          | 88 Magnet-controlled slow-speed flash lamp                  |
| Page 22: | 65 Low sound of police car with light                         |          |   |
|          | 66 Low sound of machine gun with light                        |          |   |

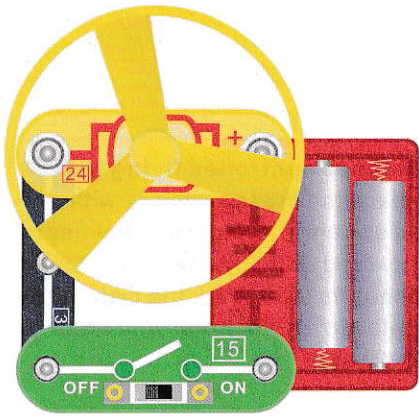


#### 4. Electric fan

Place the yellow fan on the motor, close the slide switch **15** and the fan will spin round.


#### 5. Magnet-controlled electric fan


Place the yellow fan on the motor, bring a magnet close to the dry reed switch **13**, the fan will spin round. Take the magnet away from dry reed switch **13** and the fan will stop rotating.

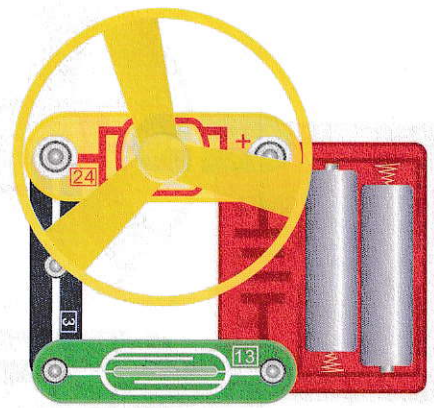

#### 6. Press switch controlled electric fan

Place the yellow fan on the motor, press the press switch **14**, the fan will rotate. Release the press switch **14**, the fan will stop rotating.

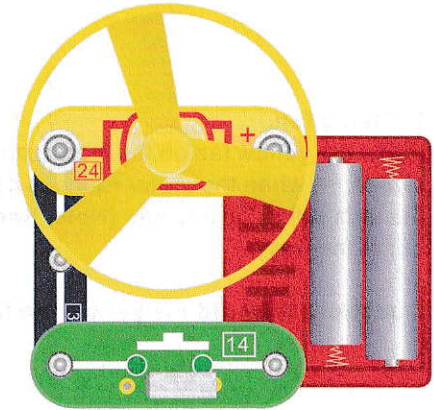


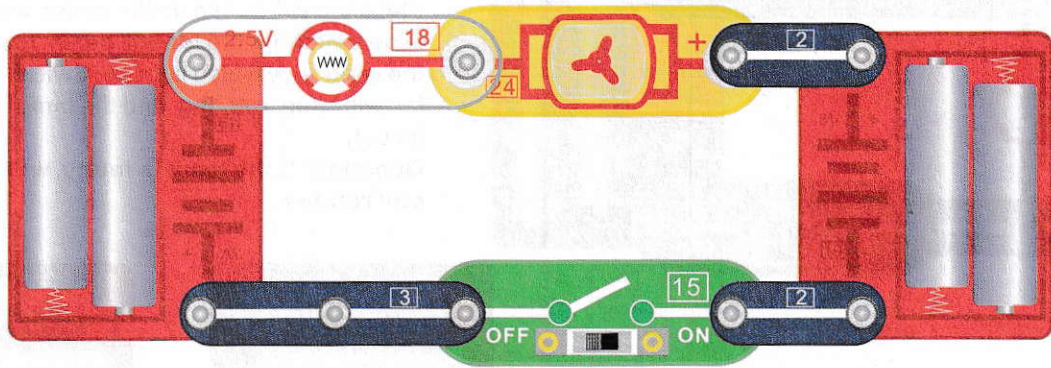

**10. An electric motor and a lamp connected in series.**


Place the yellow fan on the motor, close the slide switch **15**, the fan will begin to rotate and the lamp **18** will also light up. Switch off and the fan will stop rotating and the lamp **18** will also go out.

**Question: If the lamp is faulty, will the fan still rotate?**

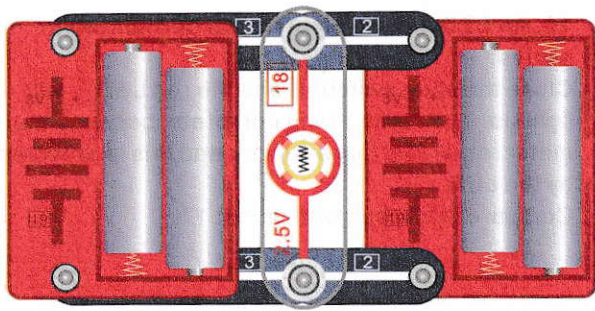

### 13. Batteries connected in parallel.

Using two similar batteries, connect the two positive poles together and the two negative poles together. In this parallel arrangement, the voltage will remain the same but it will lengthen the battery's service life.

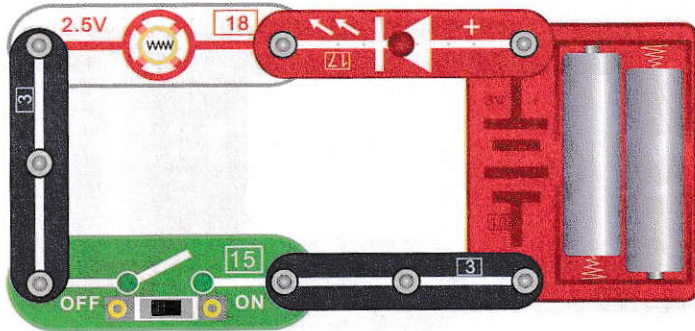

### 14. Using an LED (light emitting diode) LED's require a resistor wired in series to prevent it burning out, you can see this on the underside of the LED.


Close the slide switch **15**, the red LED **17** will light up.

### 15. Magnet-controlled LED

Replace the slide switch **15** with dry reed switch **13**.


Bring a magnet near to the dry reed switch **13**, the red LED **17** will light up, take the magnet away, the red LED **17** will go out.

**Question:** Can you think of a use for this circuit?

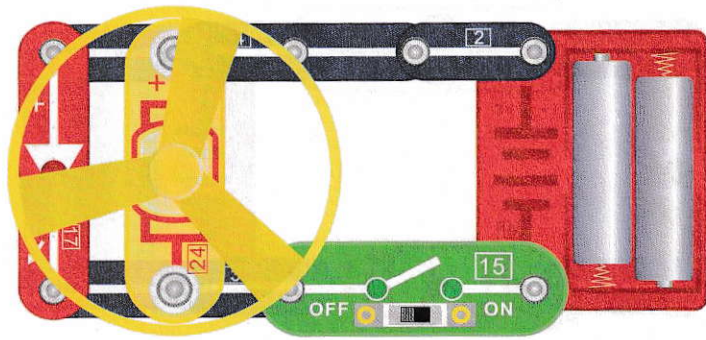


**18. An LED and an electric fan connected in parallel.**  
Close the slide switch **15**, the red LED **17** will light up and the fan will begin to rotate.

**Question:** If the LED is faulty, will the fan still rotate?

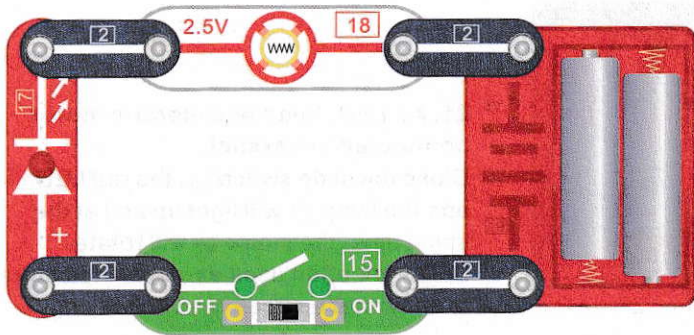

**19. One-way conductivity of LED.**

Close the slide switch **15**, you will see that the red LED **17** will all not light up, this is because the LED will only allow the current flow from positive to negative and not from negative to positive. To test this, turn the LED round.

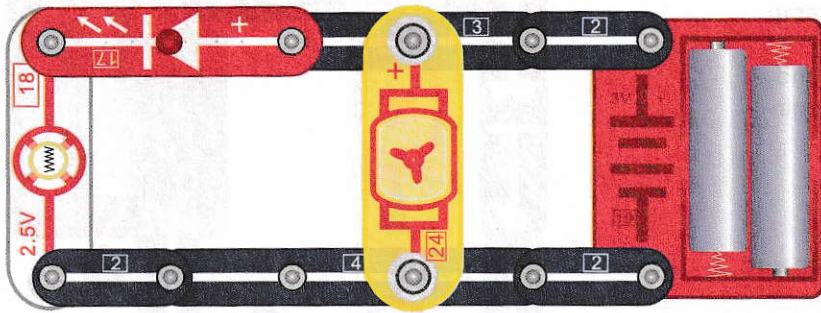


### 22. Series-parallel connection of LED, lamp and electric motor(1)


After connecting circuit , motor **24** begin to rotate, the red LED **17** will light up , but the lamp **18** won't light up ,this is because the lamp and LED are connected in series, current passing through the lamp is too small. After series connecting LED, the lamp also connects to motor in parallel, this calls connecting in series-parallel .

### 23. Series-parallel connection of LED, lamp and electric motor(2)

After connecting circuit, the lamp **18** and red LED **17** will light up , but the motor **24** won't work , the principle as above.

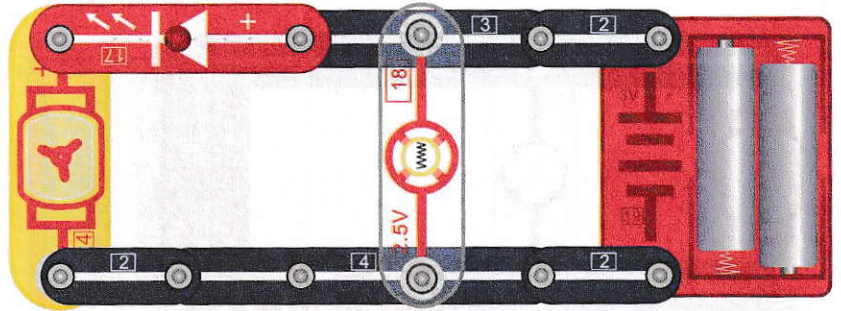



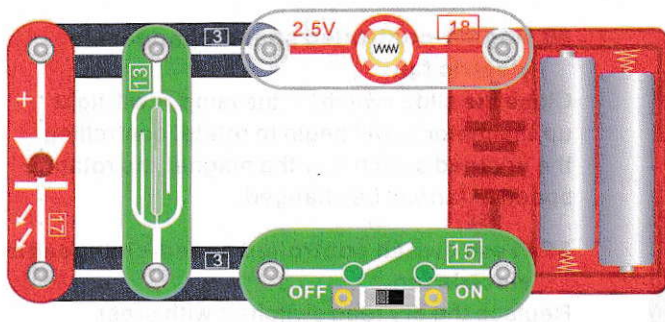

### 26. Switched Lamp and LED.


Close the slide switch **15**, only the red LED **17** will light up, put a magnet near to dry reed switch **13**, the red LED **17** will go out and the lamp **18** will light up.

### 27. Electric fan and LED worked by turns

Replace the lamp **18** with motor **24**, operation as above.


### 28. Switched lamp and motor.

Close the slide switch **15**, the lamp **18** will light up and the motor **24** will begin to rotate. Press the press switch **14**, the motor will stop and the brightness of the lamp **18** will increase. Note, if the motor fails to restart when the switch is released, switch off switch **15**.

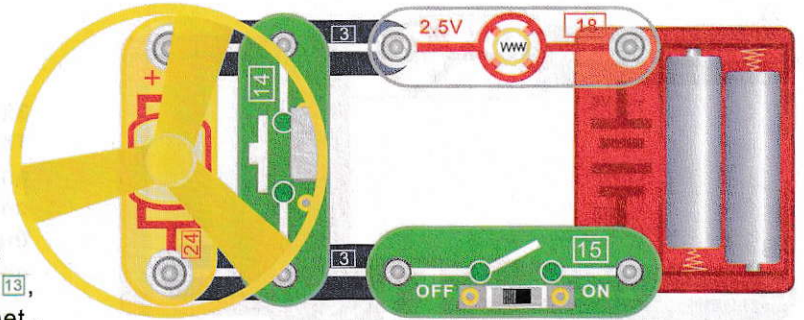

### 29. Magnet-controlled light-changeable lamp

Replace the press switch **14** with dry reed switch **13**, you can control the lightness of lamp by a magnet.

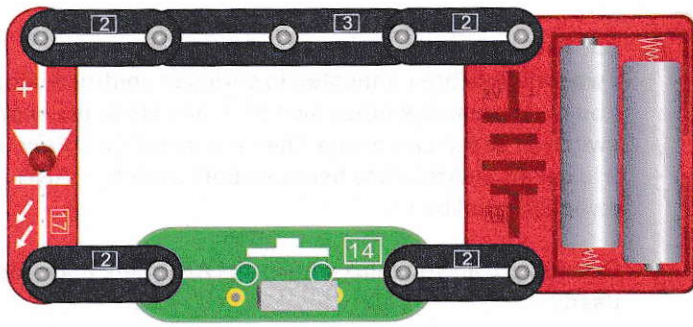



**33. Simple and easy signalling practice.** Press the press switch 14 rhythmically; the red LED 17 will flash, so it can be used for sending messages in Morse code or make up your own code!

**34. Changing the direction of rotation of an electric motor.**


Press the press switch 14, the fan will be rotated anticlockwise. Release the press switch 14, put a magnet near to the dry reed switch 13, the fan will rotate in clockwise direction.

(Safety Note: Do not have both switches on at the same time, or you will damage the batteries.)

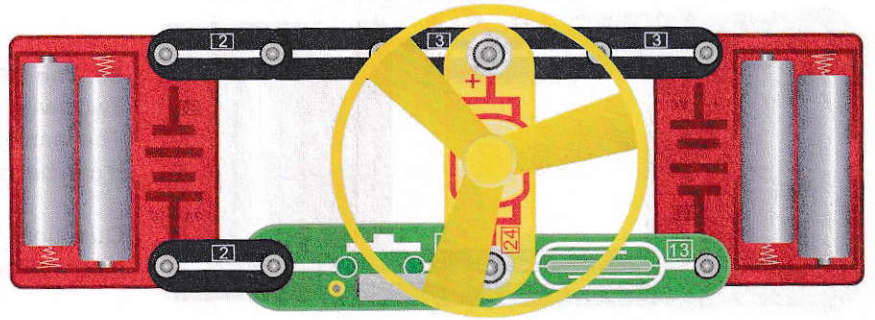


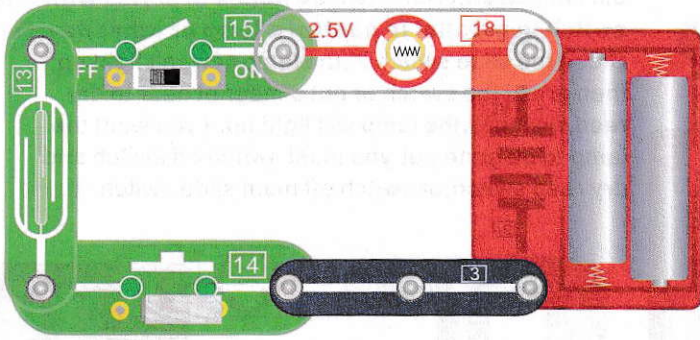

**37. Three series connected switches to control a lamp**  
 After connecting circuit, you must close the slide switch 15, press the press switch 14 and put a magnet near to dry reed switch 13, the lamp 18 will light up.

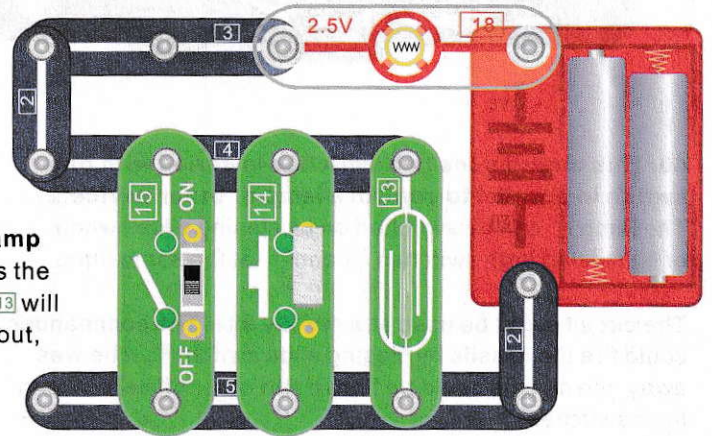

**38. Three parallel connected switches to control a lamp**  
 After connecting circuit, close the slide switch 15 or press the press switch 14 or put a magnet near to dry reed switch 13 will make the lamp 18 lit up, if you want the lamp to be gone out, you must switch off all these three switches.

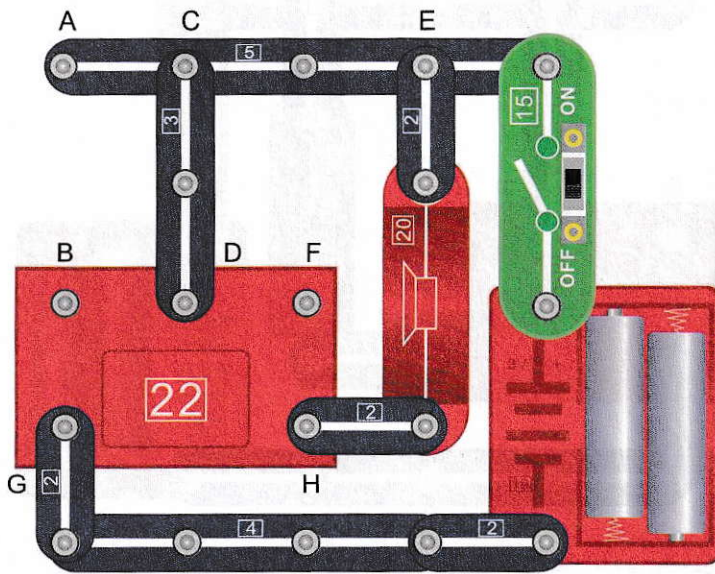

**41. Sound of police car**

Close the slide switch **15**, the speaker **20** will give out sound of police car.

**42. Sound of machine gun**

Connect terminal CD and EF, close the slide switch **15**, the speaker **20** will give out sound of machine gun.

**43. Sound of fire engine**

Connect terminal AB and CD, close the slide switch **15**, the speaker **20** will give out sound of fire engine.

**44. Sound of ambulance**


Connect terminal CD and BG, close the slide switch **15**, the speaker **20** will give out sound of ambulance.

**45. Sound of gaming machine.**

Connect terminals A & B, close the slide switch **15**, the speaker **20** will make the sound of a gaming machine.

**46. Sound of vibration**

Connect terminal AB and FH, close the slide switch **15**, the speaker **20** will give out sound of vibration.

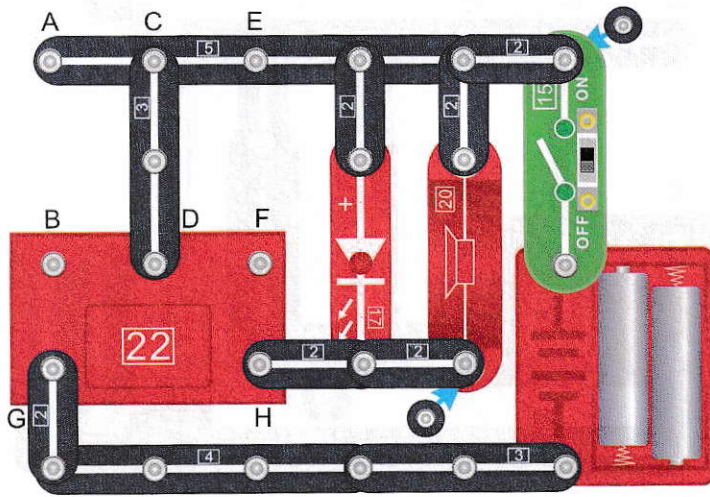

**53. Red-light alarming sound of police car**

Close the slide switch **15**, the speaker **20** will give out sound of police car, the red LED **17** will give out red light at the same time to play true effect.

**54. Red-light alarming sound of machine gun.**

Connect terminal CD and EF, close the slide switch **15**, the speaker **20** will give out sound of machine gun, the red LED **17** will give out red light at the same time to play true effect.

**55. Red-light alarming sound of fire engine**

Connect terminal AB and CD, close the slide switch **15**, the speaker **20** will give out sound of fire engine, the red LED **17** will give out red light at the same time to play true effect.

**56. Red-light alarming sound of ambulance**


Connect terminal CD and BG, close the slide switch **15**, the speaker **20** will give out sound of ambulance, the red LED **17** will give out red light at the same time to play true effect.

**57. Red-light alarming sound of game machine**

Single connect terminal AB, close the slide switch **15**, the speaker **20** will give out sound of machine gun, the red LED **17** will give out red light at the same time to play true effect.

**58. Magnet-controlled red-light alarming sound of vibration**

Connect terminal AB and FH, close the slide switch **15**, the speaker **20** will give out sound of vibration, the red LED **17** will give out red light at the same time to play true effect.

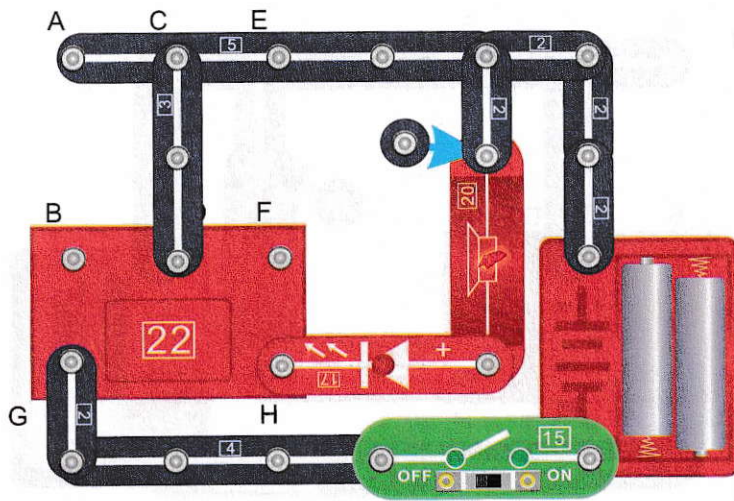

**65. Low sound of police car with light**

Close the slide switch 15, the speaker 20 will give out low sound of police car, the red LED 17 will light up at the same time .

**66. Low sound of machine gun with light**

Connect terminal CD and EF, close the slide switch 15, the speaker 20 will give out low sound of machine gun, the red LED 17 will light up at the same time.

**67. Low sound of fire engine with light**

Connect terminal AB and CD, close the slide switch 15, the speaker 20 will give out low sound of fire engine, the red LED 17 will light up at the same time.

**68. Low sound of ambulance with light**


Connect terminal CD and BG, close the slide switch 15, the speaker 20 will give out low sound of ambulance, the red LED 17 will light up at the same time.

**69. Low sound of game machine with light**

Single connect terminal AB, close the slide switch 15, the speaker 20 will give out low sound of game machine, the red LED 17 will light up at the same time.

**70. Low sound of vibration with light**

Connect terminal AB and FH, close the slide switch 15, the speaker 20 will give out low sound of vibration, the red LED 17 will light up at the same time.

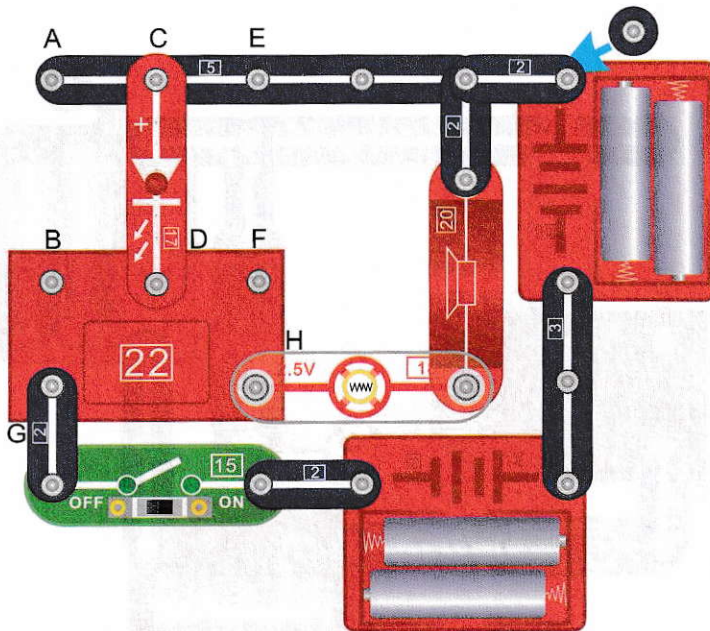


**77. Middle sound of police car with light**  
Close the slide switch **15**, the speaker **20** will give out sound of middle sound of police car, the red LED **17** will light up at the same time and the lamp **18** will also light up.

**78. Middle sound of machine gun with light**  
Connect terminal CD and EF, close the slide switch **15**, the speaker **20** will give out sound of middle sound of machine gun, the red LED **17** will light up at the same time and the lamp **18** will also light up.

**79. Middle sound of fire engine with light**  
Connect terminal AB and CD, close the slide switch **15**, the speaker **20** will give out sound of middle sound of fire engine, the red LED **17** will light up at the same time and the lamp **18** will also light up.

**80. Middle sound of ambulance with light**  
Connect terminal CD and BG, close the slide switch **15**, the speaker **20** will give out sound of middle sound of ambulance, the red LED **17** will light up at the same time and the lamp **18** will also light up.

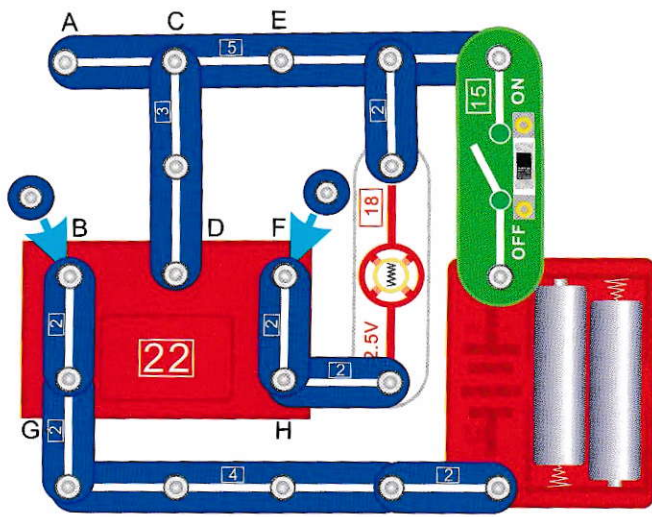

**85.Speedy flash lamp**

Close the slide switch<sup>15</sup>,the lamp<sup>18</sup> will flash quickly.

**86.Magnet-controlled speedy flash lamp**

Replace the slide switch<sup>15</sup> with dry reed switch<sup>13</sup>,put a magnet near to dry reed switch, the lamp<sup>18</sup> will flash quickly.

**87.Slow flash lamp**

Unconnect the wire of terminal BG and FH, connect terminal BF,close the slide switch<sup>15</sup>, the lamp<sup>18</sup> will flash slowly .

**88.Magnet-controlled slow-speed flash lamp**

Unconnect the wire of terminal BG and FH, connect terminal BF, replace the slide switch<sup>15</sup> with dry reed switch<sup>13</sup>,put a magnet near to dry reed switch, the lamp<sup>18</sup> will flash slowly.




# PREFACE

The Electronic Brain Box MINI88 is designed to teach the principles of electronics and is for use in the home or the classroom. It could be used to Key Stage 1 and 2 electronics.

Students find the experiments stimulating and absorbing. It provides many hours of fun whilst learning the skills and concepts of electricity and electronics so necessary in today's environment. The process of actually building the circuits provides a real understanding of how circuits work..


All the parts are designed for quick and easy assembly, components being connected together with press-studs.

Older children will increase their knowledge and understanding of electronics by designing their own circuits.

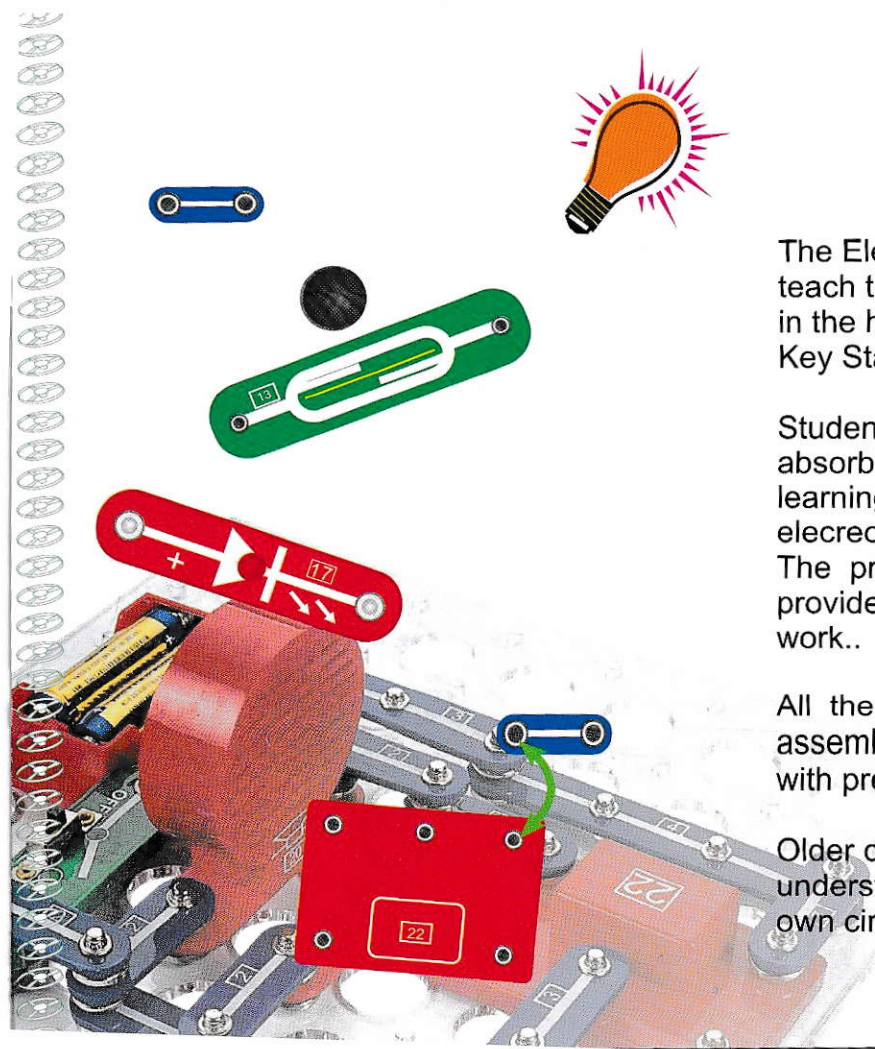


# Contents...

| PAGE     | EXPERIMENT  | PAGE     | EXPERIMENT   |
|----------|---|----------|--|
| Page 1:  | 1 Lamp  | Page 11: | 23 Series-parallel connection of LED ,lamp and electric motor(2)   |
|          | 2 Magnet-controlled lamp  |          | 24 Series-parallel connection of LED ,lamp and electric motor(3)   |
|          | 3 Press switch controlled lamp  |          | 25 Series-parallel connection of LED ,lamp and electric motor(4)   |
| Page 2:  | 4 Electric fan  | Page 12: | 26 Switched Lamp and LED   |
|          | 5 Magnet-controlled electric fan  |          | 27 Electric fan and LED worked by turns  |
|          | 6 Press Switch controlled electric fan  |          | 28 Switched lamp and motor   |
| Page 3:  | 7 Flying fan  | Page 13: | 29 Magnet-controlled light-changeable lamp   |
|          | 8 Magnet-controlled flying fan  |          | 30 Magnet-controlled speed-changeable electric fan   |
|          | 9 Clockwise and anticlockwise rotation of an electric motor   |          | 31 Press Switch controlled speed-changeable electric fan   |
| Page 4:  | 10 An electric motor and a lamp connected in series   | Page 14: | 32 Circuit tester  |
| Page 5:  | 11 An electric motor and a lamp connected in parallel   |          | 33 Simple and easy signalling practice   |
| Page 6:  | 12 Batteries connected in series  |          | 34 Changing the direction of rotation of an electric motor   |
|          | 13 Batteries connected in parallel  | Page 15: | 35 The AND gate  |
| Page 7:  | 14 Using an LED(light emitting diode)LED s require a resistor wired in series to prevent it burning out, you can see this on the underside of the LED | Page 16: | 36 The OR gate   |
|          | 15 Magnet-controlled LED  |          | 37 Three series connected switches to control a lamp   |
|          | 16 An LED and an electric fan connected in series   |          | 38 Three parallel connected switches to control a lamp   |
| Page 8:  | 17 An LED and an lamp connected in parallel   | Page 17: | 39 This circuit uses two switches in series with one switch in parallel to control a lamp or other device(1) |
|          | 18 An LED and an electric fan connected in parallel   |          | 40 This circuit uses two switches in series with one switch in parallel to control a lamp or other device(2) |
| Page 9:  | 19 One-way conductivity of LED  | Page 18: | 41 Sound of police car   |
|          | 20 Series connection of LED ,lamp and electric motor  |          | 42 Sound of machine gun  |
| Page 10: | 21 An LED, lamp and electric motor connected in parallel  |          |  |
|          | 22 Series-parallel connection of LED ,lamp and electric motor(1)  |          |  |

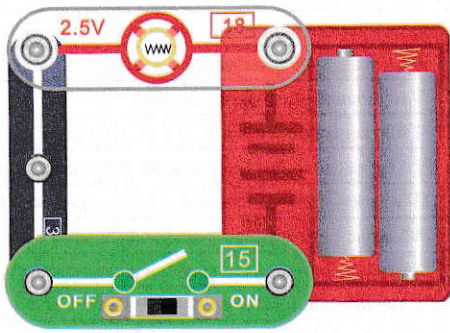


### 1. Lamp

Close slide switch **15** and the lamp **18** will light up. Switch off and lamp **18** will go out.

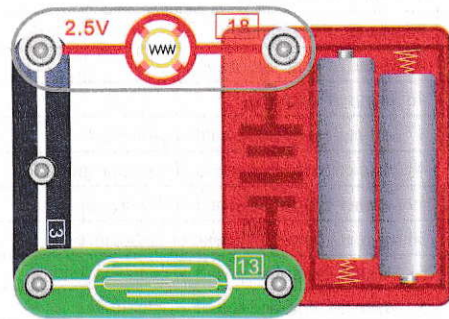


### 2. Magnet-controlled lamp

Put a magnet near to dry reed switch **13**, lamp **18** will light up. Put the magnet away from dry reed switch **13**, lamp **18** will go out.

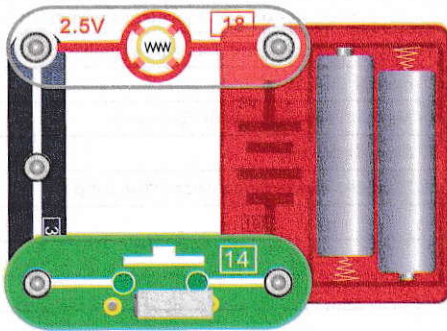

### 3. Press switch controlled lamp

Press the press switch **14**, lamp **18** will light up. Release the press switch **14**, lamp **18** will go out.

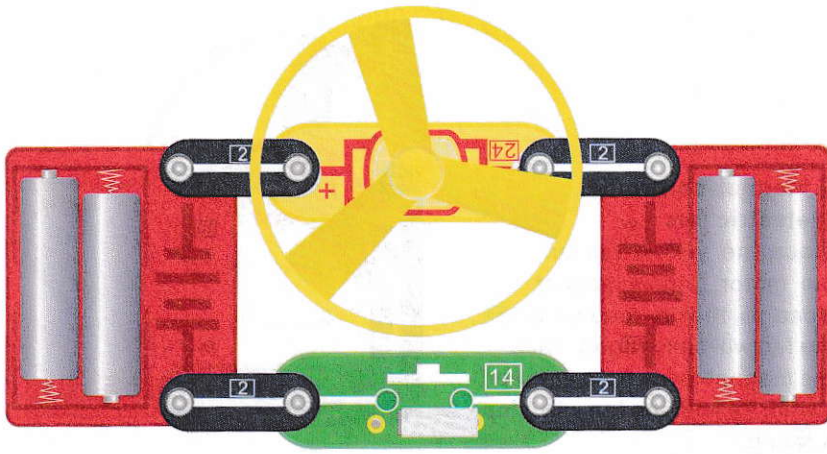

**8. Magnet-controlled flying fan.**

Replace the press switch **14** with dry reed switch **13**, bring a magnet near to dry reed switch **13**, when the motor reaches its top speed, the dish will fly up into air. (Note: Keep your head out of the way!)


**7. Flying fan.**

Place the yellow fan on the motor, press the press switch **14**, when the motor reaches its top speed, the dish will fly up into air. (Note: Keep your head out of the way!)

**Question: Why did the yellow fan fly into the air ?**

**9. Clockwise and anticlockwise rotation of an electric motor**

Replace the dry reed switch **13** with the press switch **14**. Remove the electric motor **24**, turn it round and replace it, press the press switch **14**, you will see that the rotation of electric motor is reversed, the dish will not fly into air but becomes an electric fan blowing air upwards.

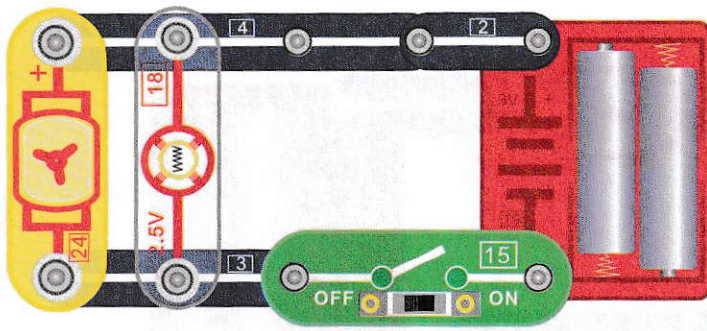


**11. An electric motor and a lamp connected in parallel.**


Place the yellow fan on the motor, close the slide switch **15**, the fan will begin to rotate and the lamp **18** will also light up. Switch off, and the fan will stop rotating and the lamp **18** will also go out.

**Question: If the lamp is faulty, will the fan still rotate?**

**12. Batteries connected in series.**

Connect the positive terminal of one battery to negative terminal of another battery with a wire. This way, the batteries are connected in series and the total voltage is the sum of the two battery's voltage. Both batteries have a voltage of 3 Volts, so the total voltage is 6 Volts.

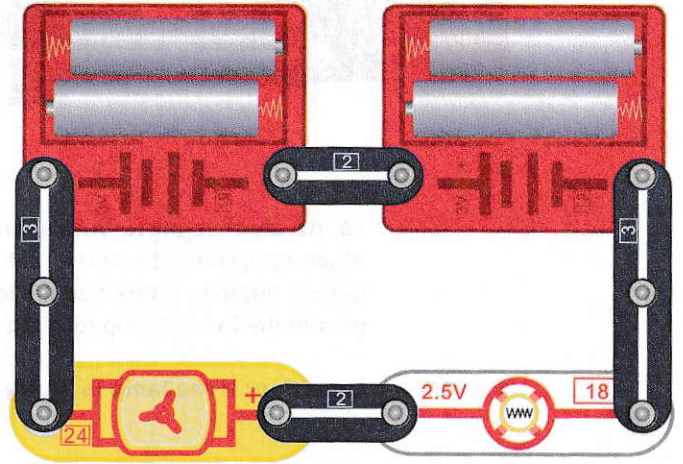

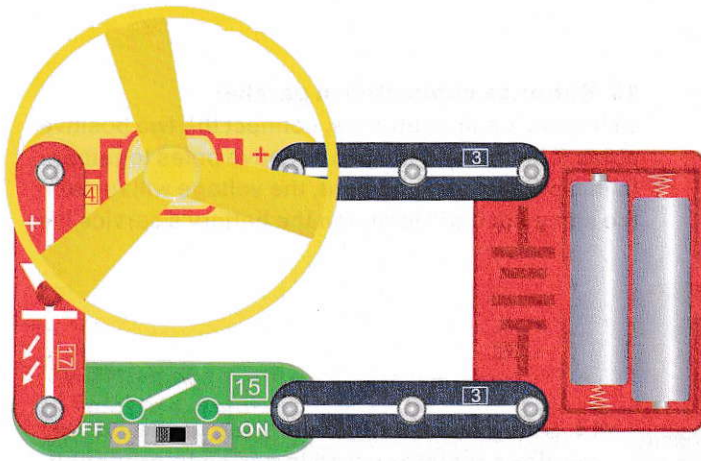

**16. An LED and an electric fan connected in series.**


Close the slide switch 15 and the red LED 17 will light up. The motor 24 will not rotate, because the motor requires a large current and this is prevented by the LED.

Compare this result with circuit 17.

**17. An LED and a lamp connected in parallel.**

Close the slide switch 15, the red LED 17 and lamp will 18 light up at the same time.

If you wish to have all the components working at the same time, then wire them in parallel and not in series.

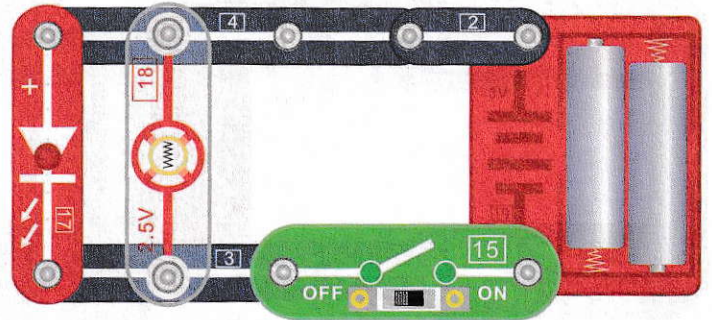

7



LED's are often used as visual indicators to show that a circuit is switched on.



9


**24. Series-parallel connection of LED, lamp and electric motor(3).**

Press the press switch [14], the red LED [17] and lamp [18] will light up, the motor [24] will also begin to rotate.

**25. Series-parallel connection of LED, lamp and electric motor(4)**

After connecting circuit, only the red LED [17] will light up, the motor [24] and lamp [18] won't work normally.

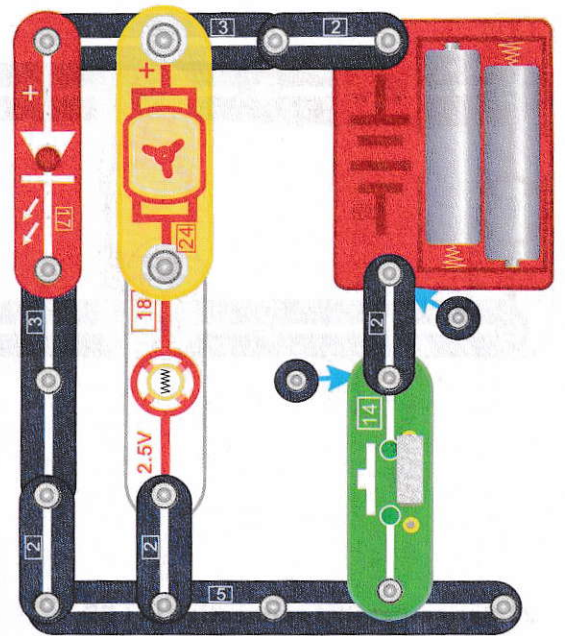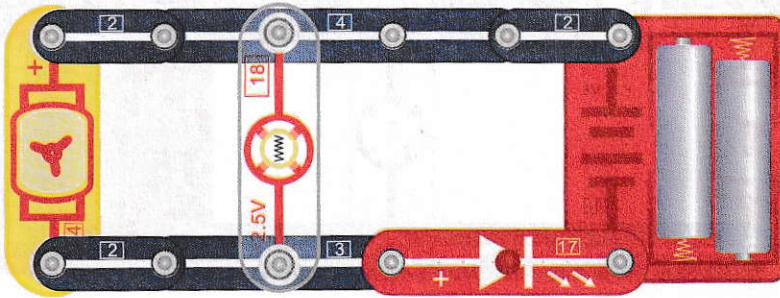

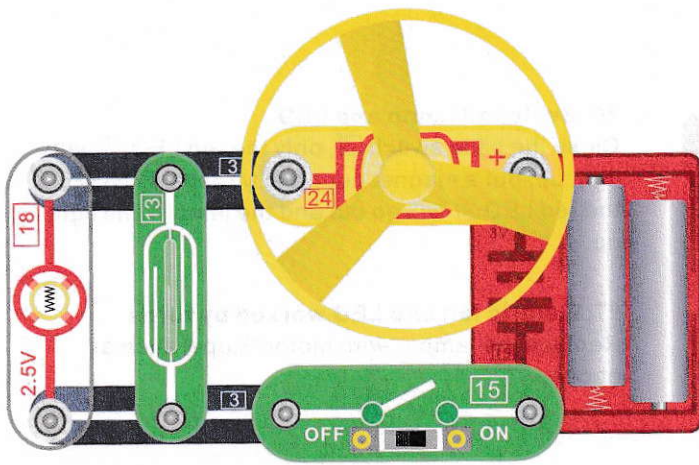


### 30. Magnet-controlled speed-changeable electric fan

Close the slide switch 15, the lamp 18 will light up, the motor 24 will begin to rotate, controlling the dry reed switch 13 with magnet, the rotating speed of fan will be changed.

### 31. Press switch controlled speed-changeable electric fan


Replace the dry reed switch 13 with press switch 14, press the switch, the rotating speed of fan will be changed.

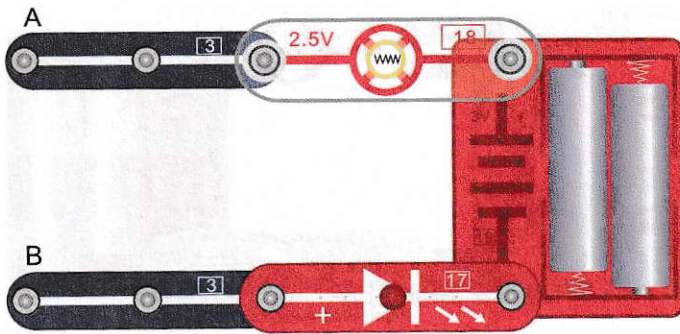

### 32. Circuit tester.

The tester can check out whether a coil of wire has any breaks in it or not. Put the two ends of the coil on terminals A and B, if the red LED 17 lights up, the wire is unbroken, if the red LED 17 doesn't light up, the wire has a break in it.




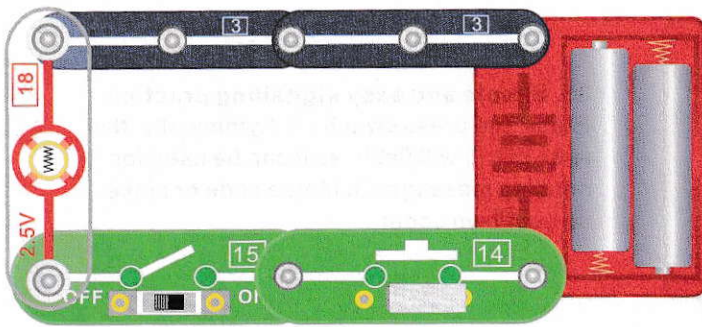

### 35. The AND gate.

Two switches are connected in series to control a lamp. You must press the push switch **14** and close the slide switch **15** at the same time, then the lamp **18** will light up. It is called an AND gate because both switch **14** AND switch **15** must be on.


Question: Can you think where this AND gate might be used?

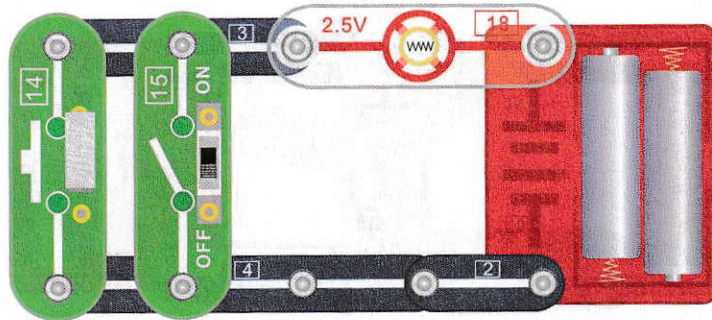

### 36. The OR gate.

Two switches in parallel are used to control a lamp. The lamp can be switched on by either of the switches. It can be switched on by switch **14** OR switch **15**.


Question: Can you think of a use for the OR gate? You may well have one in your house!

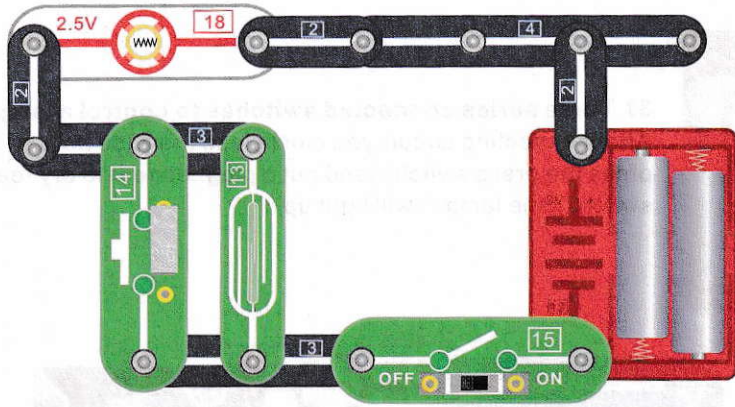

**40. This circuit uses two switches in series with one switch in parallel to control a lamp or other device(2).** The lamp 18 can be switched on by closing slide switch 15, or by closing both switches 13 and 14 at the same time.

The circuit might be used at a missile site. The commander could fire the missile by closing slide switch 15. If he was away, the missile could be fired if two other officers closed their switches.

**39. This circuit uses two switches in series with one switch in parallel to control a lamp or other device(1).** Close the slide switch 15, the lamp 18 won't light up, then press the switch or put a magnet near to dry reed switch 13, the lamp will light up, if you want the lamp to be gone out, you must switch off switch and dry reed switch, or switch off main slide switch 15.

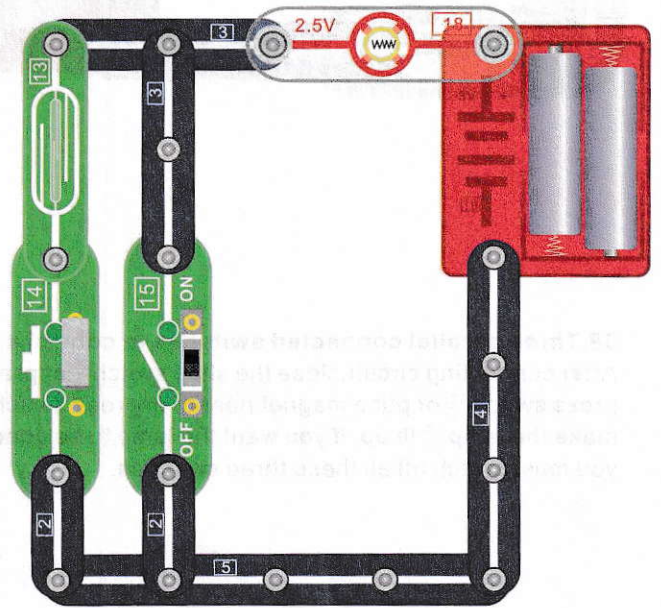

**47. Magnet-controlled sound of police car**

Put a magnet near to dry reed switch **13**, the speaker **20** will give out sound of police car.

**48. Magnet-controlled sound of machine gun**

Connect terminal CD and EF, put a magnet near to dry reed switch **13**, the speaker **20** will give out sound of machine gun .

**49. Magnet-controlled sound of fire engine**


Connect terminal AB and CD, put a magnet near to dry reed switch **13**, the speaker **20** will give out sound of fire engine .

**50 Magnet-controlled Sound of ambulance**

Connect terminal CD and BG, put a magnet near to dry reed switch **13**, the speaker **20** will give out sound of ambulance .

**51. Magnet-controlled sound of game machine**

Single connect terminal AB, put a magnet near to dry reed switch **13**, the speaker **20** will give out sound of game machine .

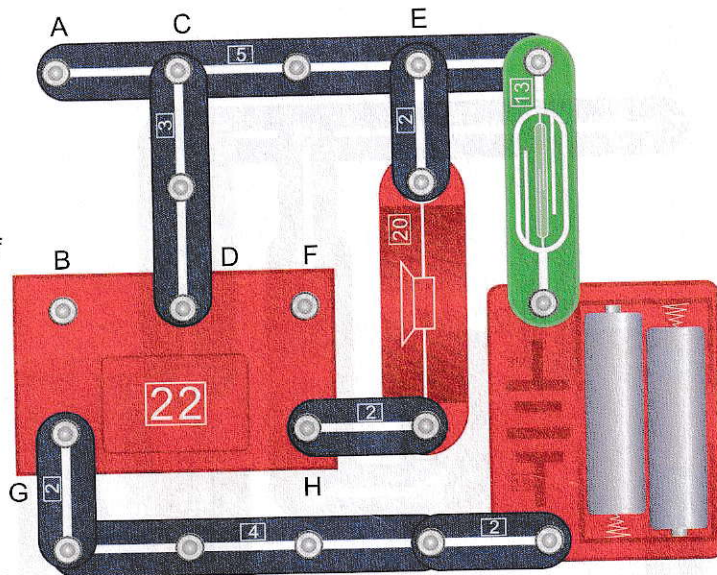

**52. Magnet-controlled sound of vibration**

Connect terminal AB and FH, put a magnet near to dry reed switch **13**, the speaker **20** will give out sound of vibration .

**59. Magnet-controlled red-light alarming sound of police car**

put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out sound of police car, the red LED<sup>17</sup> will give out red light at the same time to play true effect.

**60. Magnet-controlled red-light alarming sound of machine gun.**

Connect terminal CD and EF, put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out sound of machine gun, the red LED<sup>17</sup> will give out red light at the same time to play true effect.

**61. Magnet-controlled red-light alarming sound of fire engine**


Connect terminal AB and CD, put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out sound of fire engine, the red LED<sup>17</sup> will give out red light at the same time to play true effect.

**62. Magnet-controlled red-light alarming sound of ambulance**

Connect terminal CD and BG, put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out sound of ambulance, the red LED<sup>17</sup> will give out red light at the same time to play true effect.

**63. Magnet-controlled red-light alarming sound of game machine**

Single connect terminal AB, put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out sound of game machine, the red LED<sup>17</sup> will give out red light at the same time to play true effect .

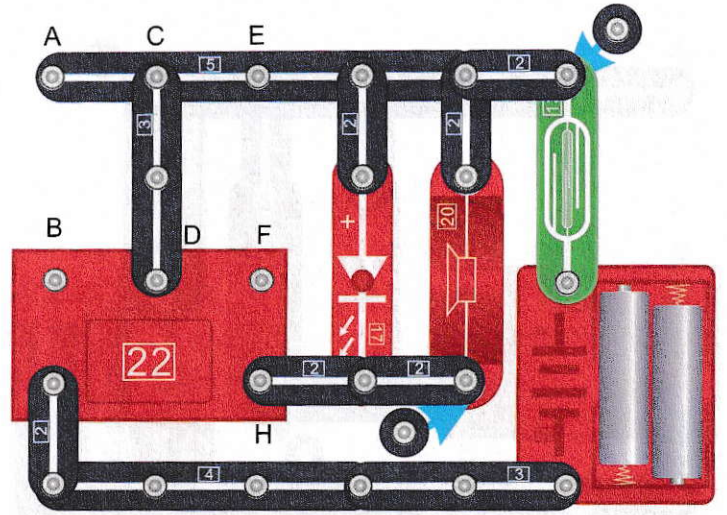

**64. Magnet-controlled red-light alarming sound of vibration**

Connect terminal AB and FH , put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out sound of vibration, the red LED<sup>17</sup> will give out red light at the same time to play true effect .

**71. Magnet-controlled low sound of police car with light**

Put a magnet near to dry reed switch 13, the speaker 20 will give out low sound of police car, the red LED 17 will light up at the same time.

**72. Magnet-controlled low sound of machine gun with light**

Connect terminal CD and EF, put a magnet near to dry reed switch 13, the speaker 20 will give out low sound of machine gun, the red LED 17 will light up at the same time.

**73. Magnet-controlled low sound of fire engine with light**


Connect terminal AB and CD, put a magnet near to dry reed switch 13, the speaker 20 will give out low sound of fire engine, the red LED 17 will light up at the same time.

**74. Magnet-controlled low sound of ambulance with light**

Connect terminal CD and BG, put a magnet near to dry reed switch 13, the speaker 20 will give out low sound of ambulance, the red LED 17 will light up at the same time.

**75. Magnet-controlled low sound of game machine with light**

Single connect terminal AB, put a magnet near to dry reed switch 13, the speaker 20 will give out low sound of game machine, the red LED 17 will light up at the same time.

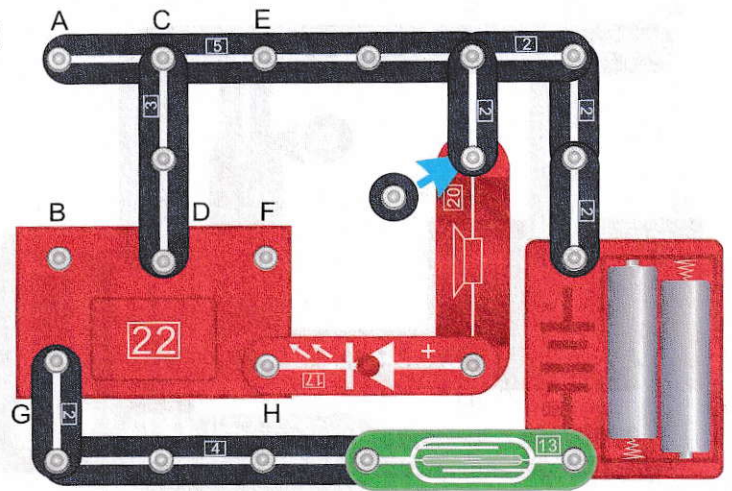

**76. Magnet-controlled low sound of vibration with light**

Connect terminal AB and FH, put a magnet near to dry reed switch 13, the speaker 20 will give out low sound of vibration, the red LED 17 will light up at the same time.

### 81. Magnet-controlled middle sound of police car with light

Put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out middle sound of police car , the red LED<sup>17</sup> will light up at the same time and the lamp<sup>18</sup> will also light up.

### 82. Magnet-controlled middle sound of machine gun with light


Connect terminal CD and EF, put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out middle sound of machine gun, the red LED<sup>17</sup> will light up at the same time and the lamp<sup>18</sup> will also light up .

### 83. Magnet-controlled middle sound of fire engine with light

Connect terminal AB and CD , put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out middle sound of fire engine, the red LED<sup>17</sup> will light up at the same time and the lamp<sup>18</sup> will also light up.

### 84. Magnet-controlled middle sound of ambulance with light

Connect terminal CD and BG, put a magnet near to dry reed switch<sup>13</sup>, the speaker<sup>20</sup> will give out middle sound of ambulance , the red LED<sup>17</sup> will light up at the same time and the lamp<sup>18</sup> will also light up.

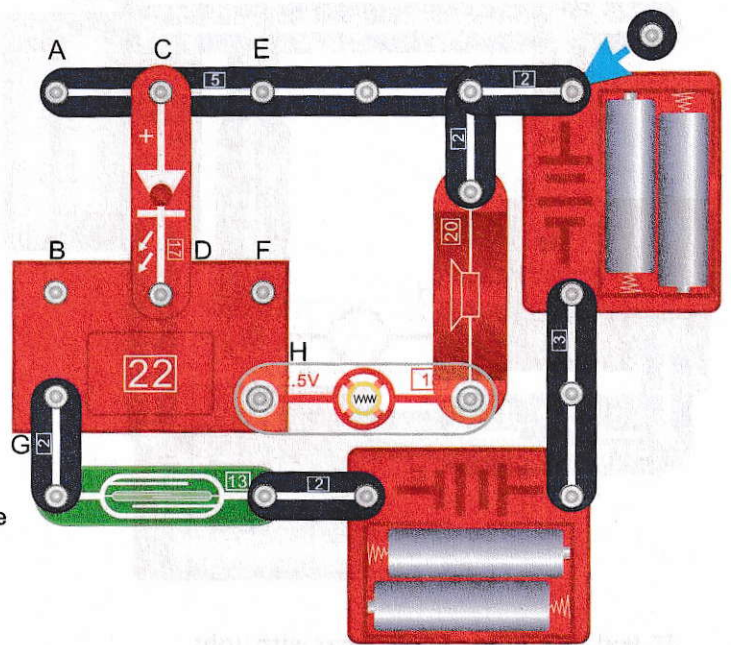

# *Electronic Project Snap-on Kit*

**WARNING!** Choking Hazard! This product contains small parts. Not recommended for children less than 6 years of age. Use with adult supervision.

**WARNING!** This product contains a motor. Do not place hands near motor while it is in operation. Use flying disc with caution.

**WARNING!** This kit contains a magnet. Magnets becoming attached to a metallic object inside the human body can a serious or fatal injury. Seek immediate medical help if the magnet is swallowed or inhaled.

**ATTENTION!** This product contains a glass light-bulb. Misuse may cause it to break, resulting in sharp pieces that could result in a cut. Use with caution.

**ATTENTION!** This set requires four AA Batteries (not included), do not connect positive and negative poles directly.

Distributed by:  
TechBrands by Electus Distribution Pty. Ltd.  
320 Victoria Rd, Rydalmere  
NSW 2116 Australia

Ph: 1300 738 555  
Int'l: +61 2 8832 3200  
Fax: 1300 738 500

[www.techbrands.com](http://www.techbrands.com)

Made in China