
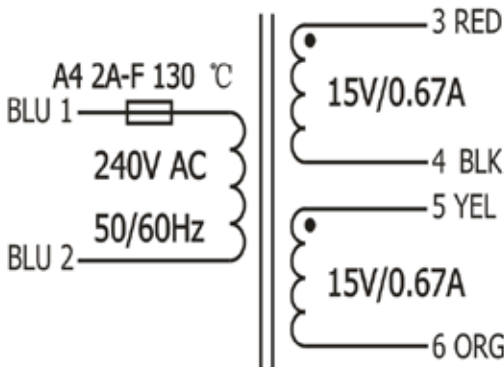


SPECIFICATION			
SCHEMATICS		INPUT PARAMETER	
		Rated Volt.	240V AC
		Rated Freq.	50/60Hz
		N/L Current	1-2Input 240V 50Hz 6mA Max.
		Leads Color	BLU- BLU
		Leads Spec.	UL1015 22AWG
		Leads Length	150 +/-10mm
		Terminal	Strip & Tin 6+/-1mm
		Sleeving	BLK PVC Tubing
		Sleeving Length	50+/-10mm
		TA	-10 to 45
OUTPUT PARAMETER			
Winding	SEC1		SEC2
Leads Color	RED-BLK		YEL-ORG
N/L Volt.±2%	17.05VAC		17.05VAC
Load Volt.±3%	15VAC		15VAC
Load Current	0.67A		0.67A
Leads Spec.	UL1015 22AWG		UL1015 22AWG
Leads Length	150+/-10mm		
Terminal	Strip & Tin 6+/-1mm		
Dielectric Strength	PRI-SEC	4KV AC 50Hz FOR 5S	
Insulation resistance	SEC-SEC	DC500V 50M! Min.	
SURGE TEST	1-2 Input 2100V Curve Similar vs standard		

EXTERNAL DIMENSION DRAWING (Unit: mm)

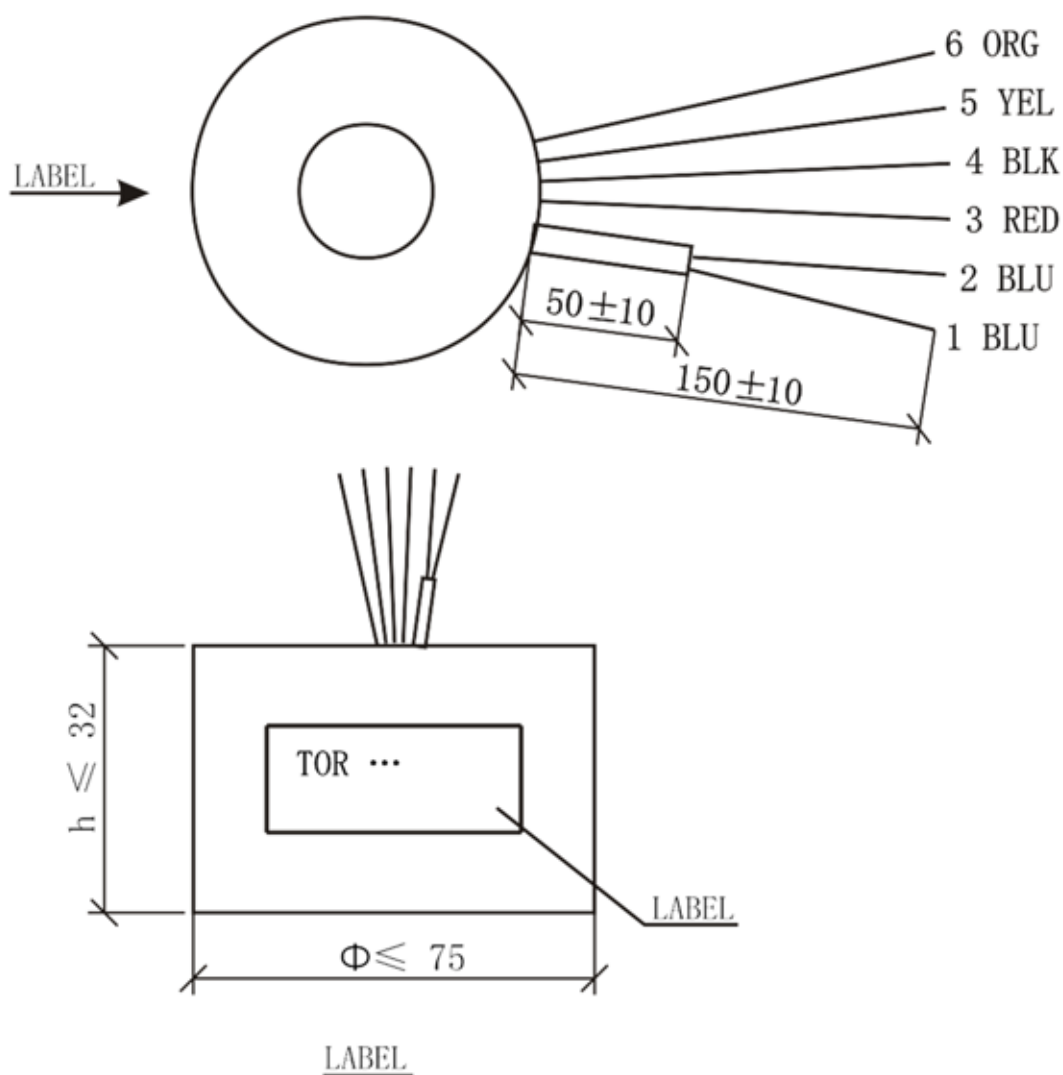

TOROIDAL TRANSFORMER

P/N:MT2086 20VA

PRI:240V AC 50Hz 130°C BLU-BLU

SEC:15V ACX2

RED-BLK+YEL-ORG

Date code:wwyy

Distributed by:
Electus Distribution Pty Ltd
46 Eastern Creek Dr,
Eastern Creek NSW 2766 Australia
1300 738 555 | electusdistribution.com.au

Made in China