


RoHS

REV.	MODIFICATION	APP.	DATE
A	NEW	WLX	2021.03.11

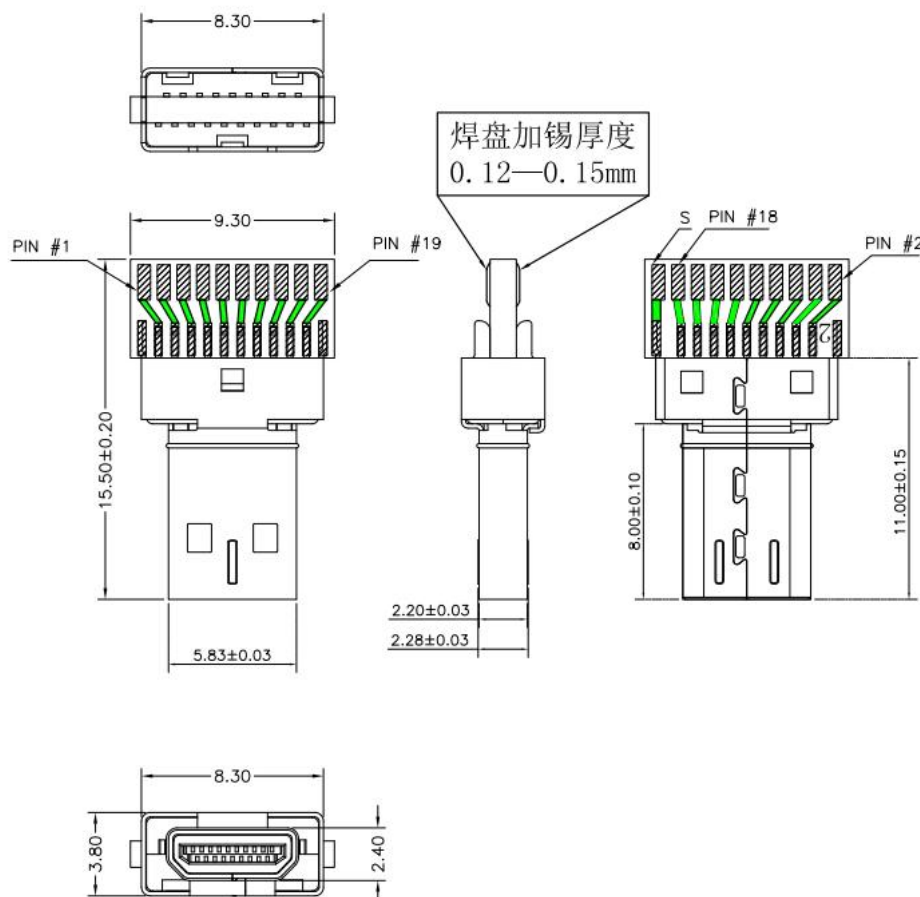

NOTE:

1. Electrical
 - 1.1. Rated Voltage: 40V AC/DC maximum
 - 1.2. Rated Current: 0.3A max.
 - 1.3. Dielectric strength: 150V AC/1 minute
 - 1.4. Insulation Resistance: 150V DC 10MΩ min.
 - 1.5. Contact Resistance: 30M Max.
2. Mechanical
 - 2.1. Insertion Force Max: 4.5kgf max.
 - 2.2. Removal Force Min: 0.5kgf min. , 2.5kgf max.
 - 2.3. Durability: 5,000 cycles at 100+150 cycles per hour
3. Plating
 - 3.1. Terminal: Contact area: gold plated over 50u" NI min.
Soldered area: 100u" mist TIN plated over 50u" NI min.
 - 3.2. Shell: G/F plated over 50u" NI min.
4. Ambient Temperature: -25°C To +85°C

Title:			
HDMI D公 带壳脚 带板 19+1			
Tolerances		App.	WULIXIAN
Linear	Angles		
x ±0.20	x.° ±5°	Chk.	QIHUJUAN
.xx ±0.15	.x.° ±2°	Dr.	LIYONG
.xxx ±0.10	.xx.° ±1°	Date.	2021.03.11
Projection	Revision.	Part no:	
	A	SSGHD-19M16-01LBS1	
Scale		Sheet	
1:1		1/1	