
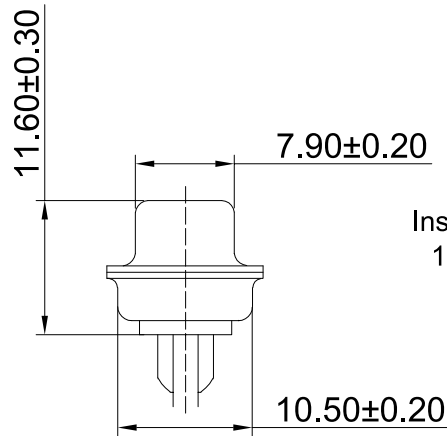
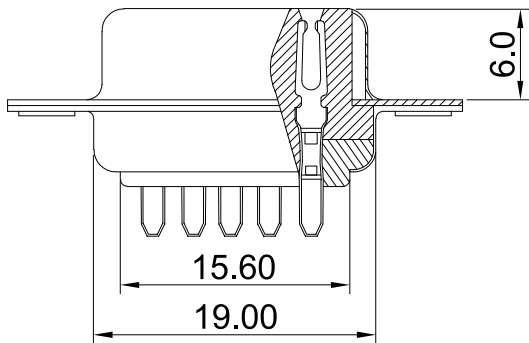


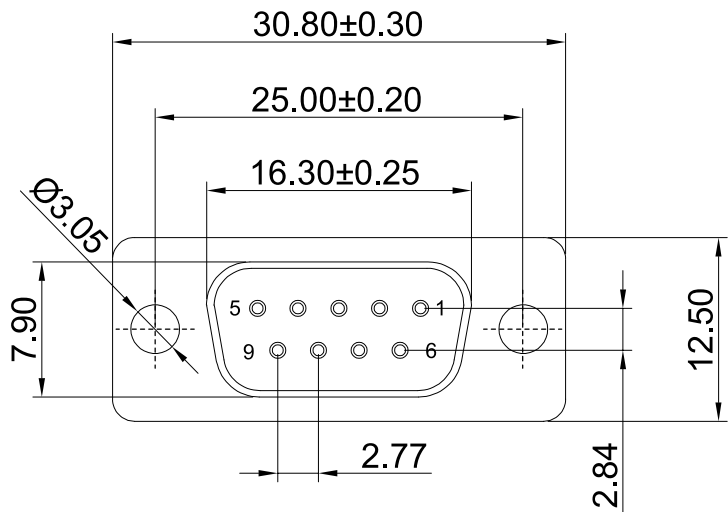

- Instruction:
- 1.Characteristic:
Rated Voltage:250VAC maximum
Rated Current:maximum 3A
Contact Impedance:30mΩ MAX.
Insulation Resistance:1000MΩ MIN.at 500V DC
Voltage Endurance Value:250V AC RMS for 1Minute
Temperature Range:-55℃-+105℃
 - 2.Material:
 - 2.1.Iron Shell:SPCC cold-rolled steel, Nickel plating on the front shell
 - 2.2.Iron Shell:SPCC cold-rolled steel, Tin plating on the back shell
 - 2.3.Rubber core: PBT Black, white, blue
 - 2.4.Terminal: H65 copper, Full tin/half copper tin
 - 3.Precautions:
 - a.Salt spray test has been conducted for 12H, and there should be no oxidation or rusting phenomenon
 - b.The finished product must not have bent or damaged needles.

RANGE LENGTH	√		
	A	B	C
L≤2	±0.05	±0.1	±0.1
2<L≤10	±0.1	±0.15	±0.2
10<L≤20	±0.15	±0.2	±0.3
20<L≤50	±0.2	±0.2.5	±0.4
50<L≤250	±0.25	±0.3	±0.5
ANGLE	±0.5°	±1.0°	±2.0°