

ELECTUSDISTRIBUTION

SWITCH CIRCUIT APPLICATION

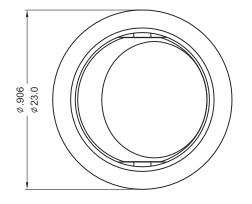



ROCKER SWITCH MODEL MR-2 SERIES

RATING:10(4)A 125/250V~ (cURus)

10(4)A 125/250V~ T125/55(ENEC15)


16À 12VDC (cURus/ENEC15) 10(4)A 250V~T125/55 (CQC)


DIELECTRIC VOLTAGE-WITHSTAND:1,000VAC FOR 1 MINUTE

INSULATION RESISTANCE:DC 500V 100MΩ (MIN.)

CONTACT RESISTANCE:20mΩ INITIAL (MAX.)

ILLUMINATED:LED 12VDC(Don't have to distinguish between the anode and cathode polarity)

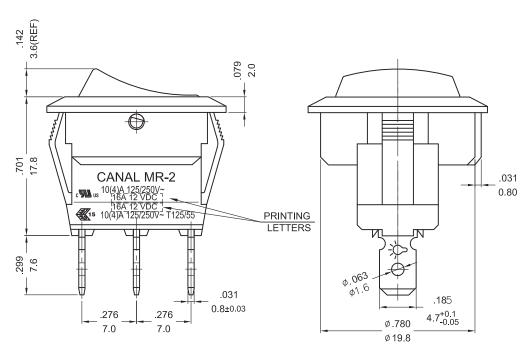

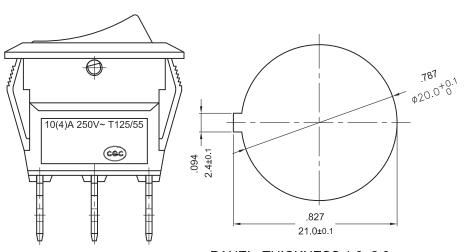

PANEL THICKNESS:1.0~2.0mm

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

Distributed by: Electus Distribution Pty Ltd, 46 Eastern Creek Dr, Eastern Creek NSW 2766 Australia 1300 738 555 | electus distribution.com.au