




Rating	21A 14VDC	Mounting Hole		Circuit Diagram
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1minute			
Operation Temperature	-20°~85°	Thickness	X	Y
Switch Function	4P SPDT ON-OFF-ON	0.75~1.25	21.2+0.1	36.6+0.1
		1.25~2	21.2+0.1	36.8+0.1
		2~3	21.2+0.1	37.0+0.1

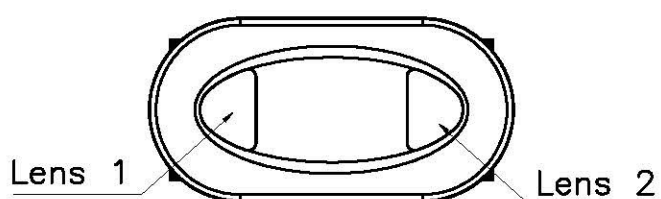

Material:






Frame: Nylon#66, Black

Actuator: Nylon#66+30%GF, Black

Lens1: Green, PC

Lens2: Red, PC

Terminal: Silver plated copper(excepted lamp terminal)

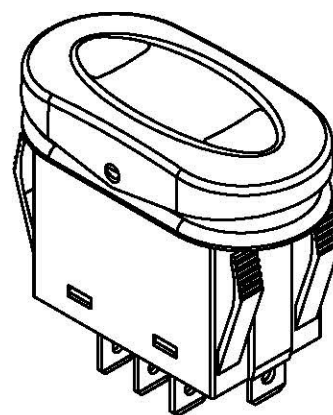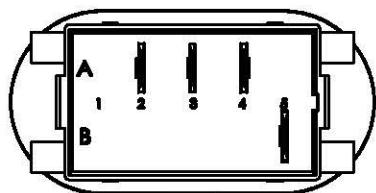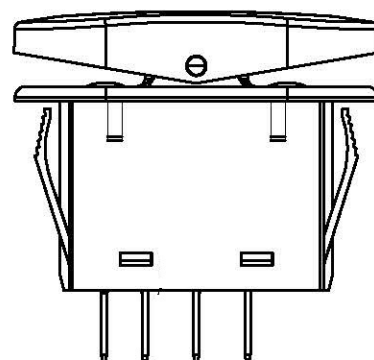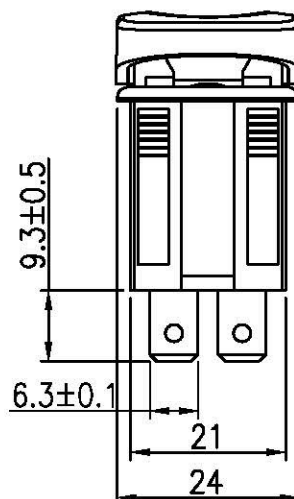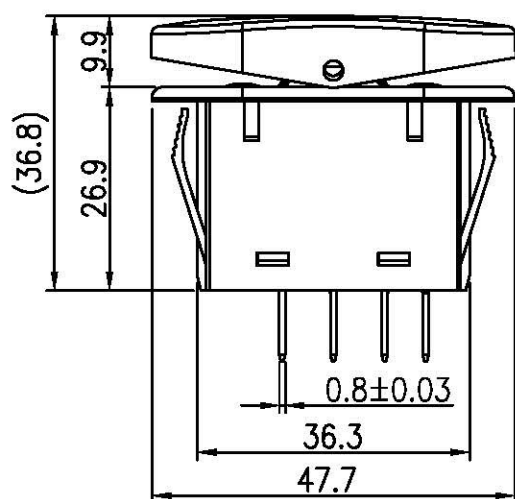

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

Model Name	ROCKER SWITCH
Model No.	SK0999
Unit	mm