



SL3735

Engine Bar Worklight




Instruction Manual

BOX CONTENTS

1x 3W LED Work Light
1x USB Charging Cable
1x Manual

PRODUCT OVERVIEW

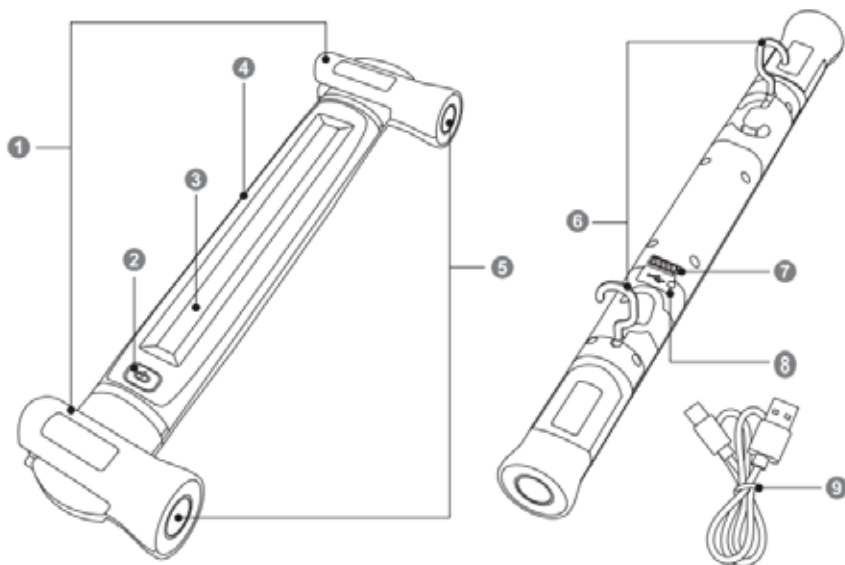


- | | |
|------------------------|------------------------------|
| 1. 180° Rotatable Base | 6. 360° Rotatable Hook |
| 2. Power Button | 7. Battery Level Indicators |
| 3. Light Source | 8. Charging Ports |
| 4. 360° Rotatable Body | 9. USB Type-C Charging Cable |
| 5. Magnet | |

WARNING!

- Ensure the work light is fully charged before using it for the first time.
- Disconnect the charger promptly once the work light is fully charged to prevent overcharging

USAGE INSTRUCTIONS

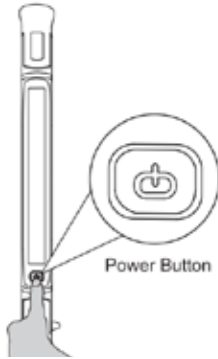

Power ON/OFF

Press the Power button to turn on the work light. To turn it off, press and hold the Power button after the work light is on.

Switch Light Mode

When the work light is on, press the Power button to cycle through the available light modes: Cool White > Warm White > Neutral White > OFF.

Charging

- Charge the work light as needed. There is no fixed charging schedule, but avoid constantly allowing the battery to fully discharge, as this may reduce its lifespan.
- Regularly inspect the charging ports for any debris, dirt, damage, or corrosion. Do not attempt to repair the ports yourself; if any issues are found, replace the work light as needed.

MAINTENANCE & STORAGE

Cleaning

- Do not clean the work light when it is charging.
- Wipe the work light with a clean, dry, soft, and lint-free cloth.
- Do not use abrasive cleaners and solvents to clean the work light.

Storage

- Fully charge the work light before storing it for more than one month.
- While in storage, recharge the work light approximately every three months to prevent deep discharge.
- Store the work light in a cool, moderately humid environment away from direct sunlight.
- Avoid leaving the work light in vehicles or confined spaces exposed to extreme heat, as this may reduce battery lifespan or pose a risk of overheating or fire. Extremely cold temperatures can also degrade performance and shorten lifespan.
- Keep the work light away from corrosive chemicals and gases.
- After removing from storage, visually inspect the work light to ensure it appears in good condition. Allow it to return to room temperature before charging.

SPECIFICATIONS

Battery: 3.7 V, 5200 mAh

Brightness Levels: 3

Lumens: 1400lms

Light Modes: Cool White, Warm White, Neutral White, OFF

Color Temperature Range: 2700 K–7000 K

Charging Port: USB Type-C (DC 5 V, 2 A)

Charging Time: 3–3.5 h

Battery Level Indicators: 100%, 75%, 50%, 25%

Protection Level: IP54

WARRANTY INFORMATION

Our product is guaranteed to be free from manufacturing defects for a period of 12 Months.

If your product becomes defective during this period, Electus Distribution will repair, replace, or refund where a product is faulty; or not fit for intended purpose.

This warranty will not cover modified product; misuse or abuse of the product contrary to user instructions or packaging label; change of mind and normal wear and tear.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

To claim warranty, please contact the place of purchase. You will need to show receipt or other proof of purchase. Additional information may be required to process your claim.

Any expenses relating to the return of your product to the store will normally have to be paid by you.

The benefits to the customer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods or services to which this warranty relates.

This warranty is provided by:

Electus Distribution

Address 46 Eastern Creek Drive, Eastern Creek NSW 2766

Ph. 1300 738 555