


■ Package Dimension:

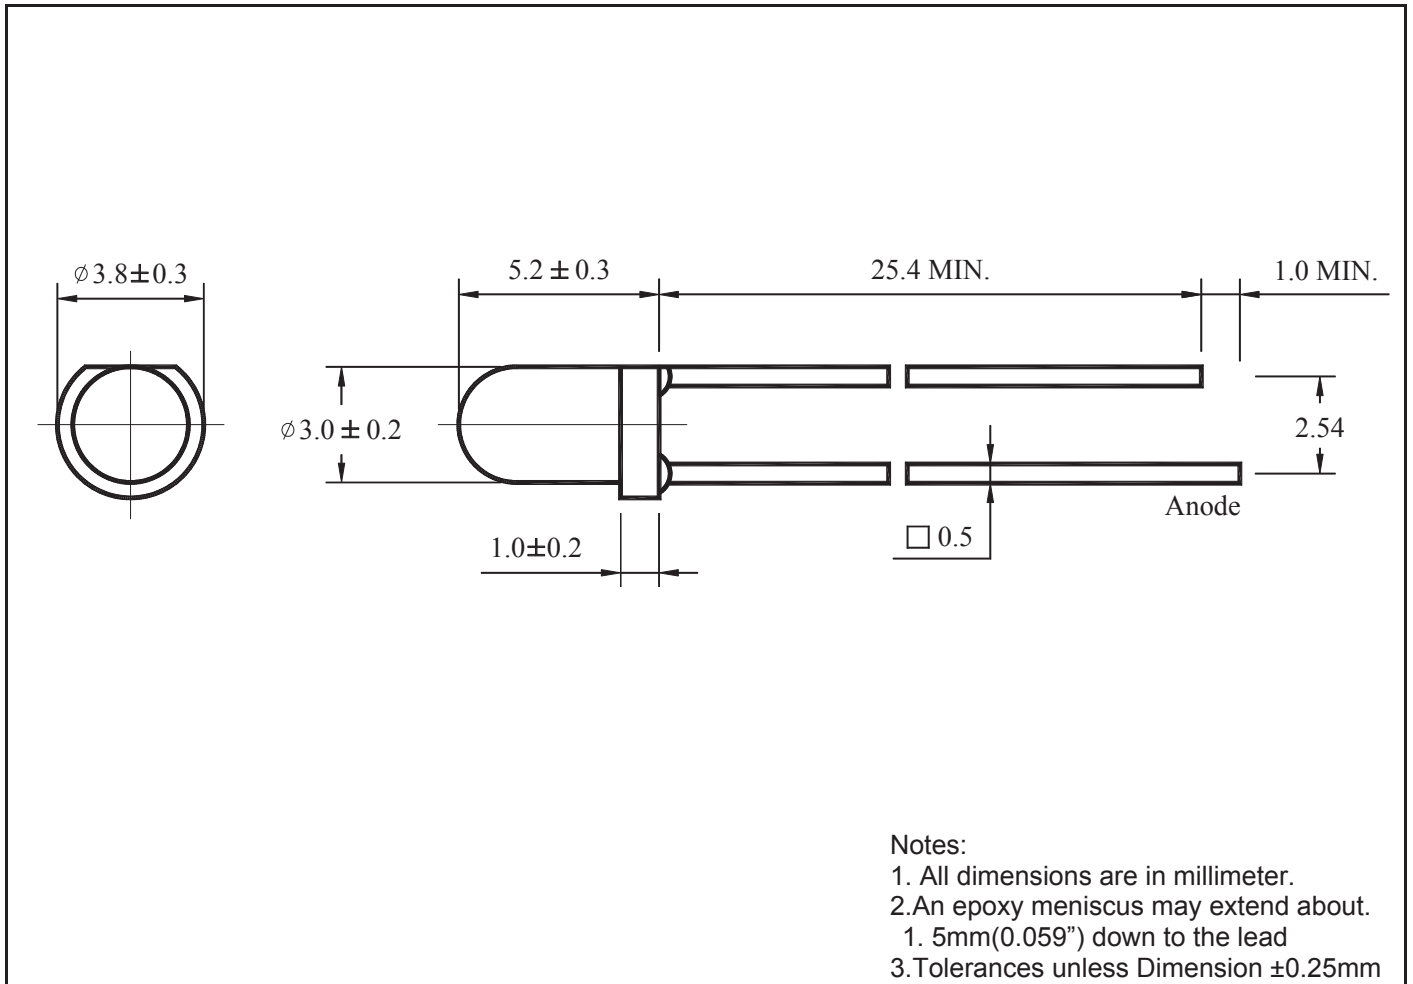

■ Features :

- Choice of various viewing angles.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different color, intensities, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

LED Parts P/N.	Chip		Lens Color
	Material	Emitted Color	
AL-314W6C-002	InGaN	White	Water Clear

■ Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating	Unit
Continuous Forward Current	I_F	30	mA
Operating Temperature	T_{opr}	-40~+85	°C
Storage Temperature	T_{stg}	-40~+100	°C
Soldering Temperature	T_{sol}	260±5	°C
Electrostatic Discharge	ESD	1000	V
Power Dissipation	P_D	120	mW
Peak Forward Current (Duty 1/10@1KHz)	I_F (Peak)	100	mA
Reverse Voltage	V_R	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I_V	10000	15000	/	mcd	$I_F=20mA$
Viewing Angle	2θ 1/2	/	20	/	deg	- - -
Chromatically Coordinates	X	/	0.31	/	/	$I_F=20mA$
	Y	/	0.32	/		
Forward Voltage	V_F	/	3.2	3.8	V	$I_F=20mA$
Reverse Current	I_R	/	/	10	μA	$V_R=5V$

■ Reliability test items and conditions :

The reliability of products shall be satisfied with items listed below.


Confidence level: 90%

LTPD: 10%


NO	ITEM	Test Conditions	Test hours/cycle	Sample Q'ty	Ac/Re
1	Solder Heat	Temp : 260°C±5°C	5 sec	22 pcs	0/1
2	Temperature Cycle	H : +100°C 15min } 5min L : -40°C 15min	50 cycles	22 pcs	0/1
3	Thermal Shock	H : +100°C 15min } 10sec L : -10°C 15min	50 cycles	22 pcs	0/1
4	High Temperature Storage	Temp : 100°C	1000 hrs	22 pcs	0/1
5	Low Temperature Storage	Temp : -40°C	1000 hrs	22 pcs	0/1
6	DC Operating Life	I _F =20mA	1000 hrs	22 pcs	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 hrs	22 pcs	0/1

■ Typical electro-optical characteristics curves :


The data typical and the value are not guaranteed.

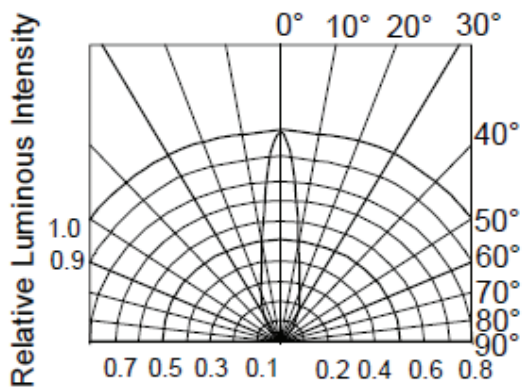


RADIATION DIAGRAM

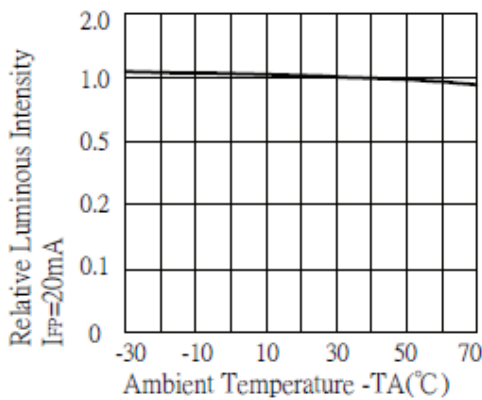


**LUMINOUS INTENSITY
Vs. AMBIENT TEMPERATURE**

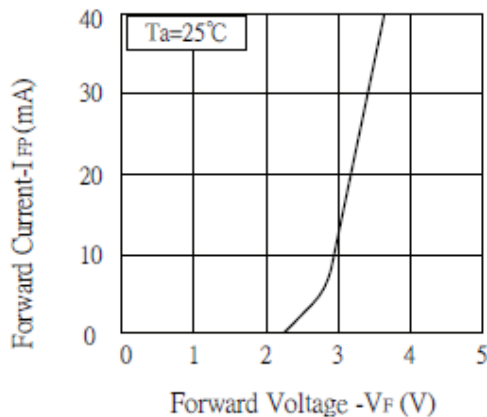


**FORWARD CURRENT
Vs. FORWARD VOLTAGE**

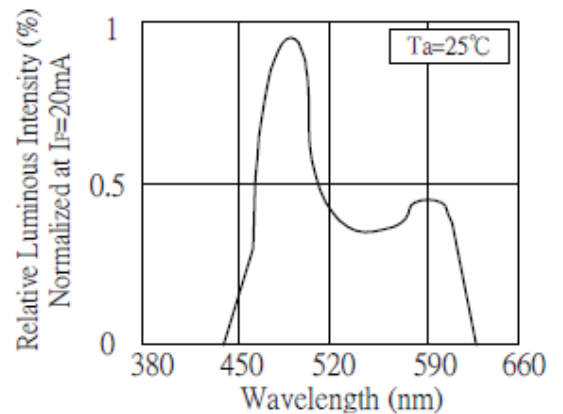

**RELATIVE LUMINOUS INTENSITY
Vs. WAVELENGTH**

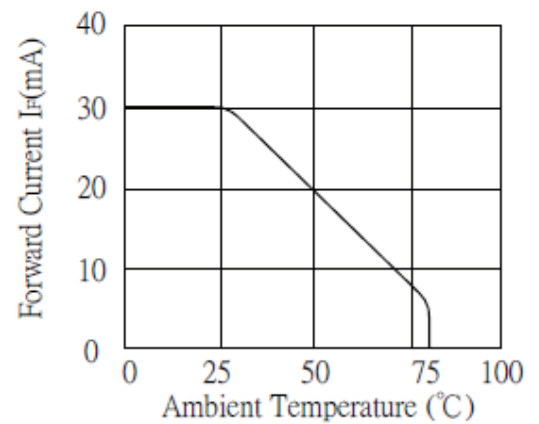

**MAX FORWARD CURRENT
Vs. AMBIENT TEMPERATURE**

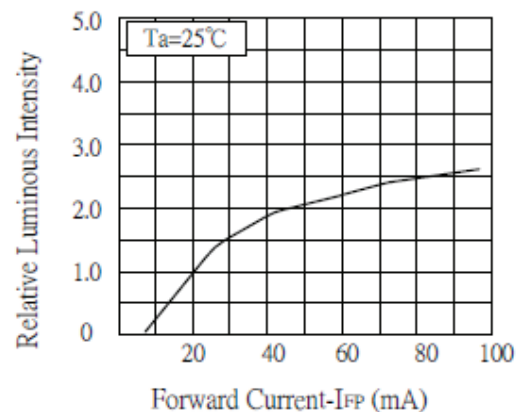

**LUMINOUS INTENSITY
Vs. FORWARD CURRENT**

Distributed by:
Electus Distribution Pty Ltd
46 Eastern Creek Dr,
Eastern Creek NSW 2766 Australia
1300 738 555 | electusdistribution.com.au

Made in China