


ZD1946 Infra Red Emmiting LED 3mm



◆PACKAGE DIMENSIONS

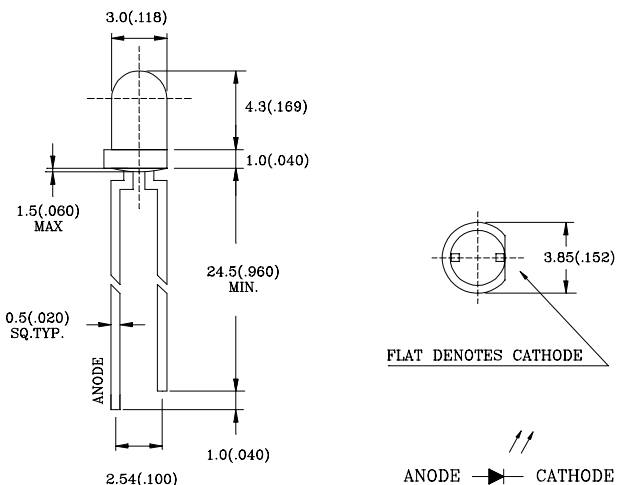

ANODE → CATHODE

◆ABSOLUTE MAXIMUN RATING: (Ta=25°C)

Part No.	P _D (mw)	V _R (V)	Topr	Tstg
ZD1946	100	5	-35°C to 85°C	-35°C to 85°C
PARAMETER	Power Dissipation	Reverse Voltage	Operating Temperature Range	Storage Temperature Range
Lead Soldering Temperature { 1.6mm (0.063 inch) From Body } 250°C ±5°C For 3 Seconds				

◆ELECTRO-OPTICAL CHARACTERISTICS: (Ta=25°C)

Part No.	V _F (V)			I _R (uA)			λ _P (nm)			2 θ 1/2 (Age)			I _e (mw/sr)		
	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
L-316EIR1C		1.2 1.4	1.6			10		940			30		6	12	
TEST CONDITION	I _F =20mA I _F =100mA			V _R = 5V			I _F = 20mA			I _F =20mA			I _F = 20mA		

BC=BLUE CLEAR

1. All dimension are in millimeter (inches).
2. Tolerance is ±0.25mm(0.01”)unless otherwise specified.