

## 展开尺寸: 400 X100mm 用光面纸



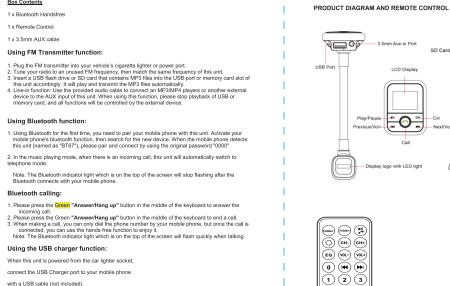

This unit will serve as a mobile phone charger.

Remote controller:



## On FM transmitter On Remote Controller Press "►/If' Button: Play the music Press \*/If' Button again: Pause playing Press and hold ">>" button: Increase Volume 3. Adjust the Volume: Press and hold "◀" Button: Decrease Volume Press "CH+" button: Increase 0.1MHz Press "CH" button first, then press "▶▶": increase the frequency Press '€': decrease the frequency Press "▶" Button: Play the next song Press "EQ" button to choose your favorite EQ 7. Switch folder: Support by remote controller only

## FEATURES:

- 5. 3.5mm line-in jack, support external audio devices.
  6. Switch to Hands-free mode automatically from music playing status when receiving calls
  7. Supports 4 loop modes. Repeat all, Randon, Repeat one, Folder,
  8. 5 EQ for optional: Natural, Rock, Pop. Classic, Jazz
  9. USS charging port for charging Fodd: Pirone, Pad and other mobile device. (output: DC 5V/2.1A).
  10. Supports 12-24V volts from the car olgarette lighter.
  11. Flexible metallic hose adapted for any type of vehicle.
  12. Flexible metallic hose adapted for any type of vehicle.
  13. With infrared remote control and easy operation

BLUETOOTH IC: CSR BC8635 Stereo (CSR 4.0)

SPECIFICATIONS:

Frequency: 87.5-108.0 MHZ

Frequency Stability: ±10ppml (0°C-+45°C) Output Frequency: 20HZ-20KHZ

Supply Voltage : 12-24V

USB Charger output: 5V/2.1A

Music Format: MP3 Format USB (Maximum support): 32GB

Micro SD (Maximum support): 32GB

Transmit Distance: >10M

Operating system: Win xp/Win vista/Win7 MP3 S/N RATIO: 60-70dbm

MP3 BITRTE: 32KPB-320KPBS