



1500 Lumens Waterproof Floating Spotlight

User Manual

ST-3327

⚠ WARNING

TO PREVENT DAMAGE TO EYESIGHT,
NEVER LOOK INTO LIGHT WHEN
LIGHT IS ON. DO NOT SHINE LIGHT
INTO THE FACE OF SOMEONE ELSE.

⚠ WARNING

READ AND FOLLOW ALL
WARNINGS AND INSTRUCTIONS IN
THIS MANUAL TO AVOID PERSONAL
INJURY OR PROPERTY DAMAGE.

OWNER'S MANUAL & OPERATING INSTRUCTIONS

IMPORTANT SAFETY WARNINGS

 **READ AND FOLLOW ALL SAFETY WARNINGS AND INSTRUCTIONS IN THE OWNER'S MANUAL BEFORE OPERATING SPOTLIGHT.**

WARNING

- Never place spotlight face down when light is on or is still hot from recent use. Doing so could burn/ignite surfaces such as seats, carpeting, etc. and cause major property damage. Always turn spotlight off when not in use.
- Always unplug charger from light and power source when not in use.
- To prevent serious damage to eyesight, never look into light when light is on. DO NOT shine light into the face of someone else.
- DO NOT touch lens of spotlight when light is on or if it was recently on. The lens will be hot and could cause serious burns.
- DO NOT allow children to handle or operate this spotlight.
- DO NOT use this product for other than its intended use.
- DO NOT charge or operate in close proximity of combustible or flammable materials.
- DO NOT charge battery in gas tight enclosures.
- DO NOT attempt to charge battery pack using both AC and DC chargers at the same time.
- DO NOT attempt to charge or operate this spotlight if cord, plug, battery, bulb or any part of the spotlight is damaged or corroded.
- DO NOT use an outdoor AC outlet to recharge battery.
- To prevent accidental electrical shock we recommend this product always be charged on a GFCI (Ground Fault Circuit Interrupter) outlet.
- Only use charging devices that are provided with the Waterproof Rechargeable LED Spotlight or its replacements.
- DO NOT disassemble or tamper with the battery.
- DO NOT dispose of battery in fire as this may result in explosion.

USE CAUTION AND COMMON SENSE WHEN OPERATING YOUR RECHARGEABLE LIGHT.


**FAILURE TO ADHERE TO THE SAFETY WARNINGS AND GUIDELINES IN THIS MANUAL
COULD RESULT IN BODILY INJURY OR PROPERTY DAMAGE.**

SAVE THIS MANUAL FOR FUTURE REFERENCE.

OPERATING INSTRUCTIONS

⚠ READ AND FOLLOW ALL SAFETY WARNINGS AND INSTRUCTIONS IN THE OWNER'S MANUAL BEFORE OPERATING SPOTLIGHT.

Inspect contents of the box to ensure all parts are included and undamaged.

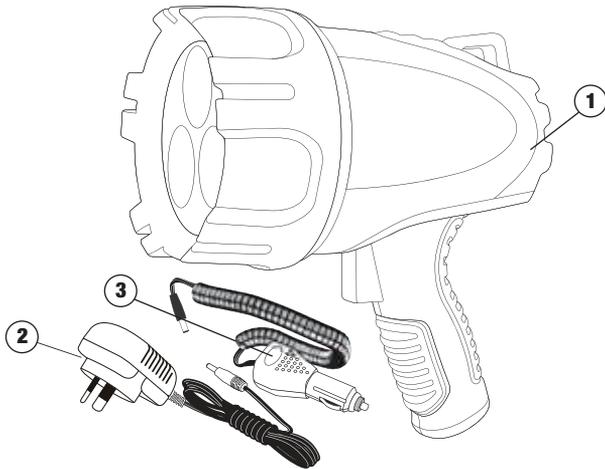

Part List:

- ① Waterproof Rechargeable LED Spotlight
 - ② 100-240 Volt AC Charger
 - ③ 12 Volt DC Charger/Adapter
- Owner's Manual

To Operate

Step 1: Follow charging instructions on Page 3 of this manual and allow battery to fully charge.


Step 2: Press trigger switch in handle once to turn spotlight ON. Press switch again to cycle through High, Low and S.O.S. settings. Press trigger switch again to turn spotlight OFF.

- A fully charged battery will provide approximately 6.5 hours of continuous light.
- Do not allow battery to completely discharge. A dim light indicates a low battery. Turn OFF spotlight and recharge battery as soon as possible.

IMPORTANT: Turn spotlight OFF before charging from AC outlet. The battery cannot charge if the spotlight is ON. Leaving spotlight ON during charging may cause damage to battery.

12-volt DC charger/adapter operates from a DC receptacle for charging battery in spotlight or continuous corded operation.

To Charge

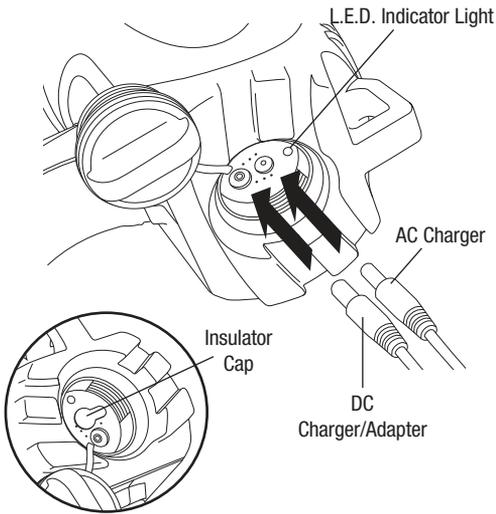

Battery Saver Mode: Automatically Reduces Brightness after 20 Minutes to Extend Battery Life.

To Charge Spotlight:

Note: Remove insulator cap and charge the spotlight before first use.

Step 1: Make sure spotlight is Off.

Step 2: Plug the AC charger or DC charger/adaptor into back of spotlight.

Note: L.E.D. Indicator light will turn on when battery is charging from both AC and DC chargers.

Always Allow Battery to Fully Charge

Step 3: For DC Charger/Adapter - Allow battery to fully charge. Green L.E.D. indicator on spotlight will automatically turn off when battery is fully charged.

Note: L.E.D. Indicator light on DC charger/adaptor stays lit while in use.

For AC Charger - Allow battery to fully charge. Red L.E.D. indicator on spotlight will automatically turn off when battery is fully charged.

Note: To prevent power drain when light is not in use for long period of time, install the orange insulator cap back before light is put in storage.

⚠ WARNING: DO NOT attempt to charge battery using both AC and DC chargers at the same time. This will damage the battery.

Step 1: Disconnect spotlight from power source.

Step 2: Unscrew cap of DC plug and pull straight away from fuse.

Step 3: Pull fuse holder and fuse out of DC plug. Observe to see if fuse is burned out.

Note: Use a 5A fuse only. Fuse is burned out when fuse element is missing or broken inside glass tube. Replace with new 5A fuse if fuse element is missing or broken.

Step 4: Pull fuse out of fuse holder. Insert new fuse into holder.

Step 5: Insert fuse holder and fuse into DC plug.

Step 6: Screw cap onto DC plug.

To Prevent Damage to Spotlight and Battery:

- Do not attempt to use spotlight while charging directly from AC outlet. Doing so may cause damage to battery and AC charger.
- DO NOT attempt to charge battery using both AC and DC chargers at the same time. This will damage the battery.

Only use charging devices that are provided with the Waterproof Rechargeable LED Spotlight or its replacements.


- **For DC Charger/Adapter** - Allow battery to fully charge. Green L.E.D. indicator on spotlight will automatically turn off when battery is fully charged.

For AC Charger - Allow battery to fully charge. Red L.E.D. indicator on spotlight will automatically turn off when battery is fully charged.

- Do not allow battery to completely discharge. A dim light indicates a low battery. Recharge battery as soon as possible after each use.
- Always keep the battery fully charged when not in use.
- For best results, fully charge battery after each use. This will prolong the overall life of the battery.

IMPORTANT: Charge battery before storing for extended periods. A completely discharged battery may not recharge properly.

To Replace DC Plug Fuse

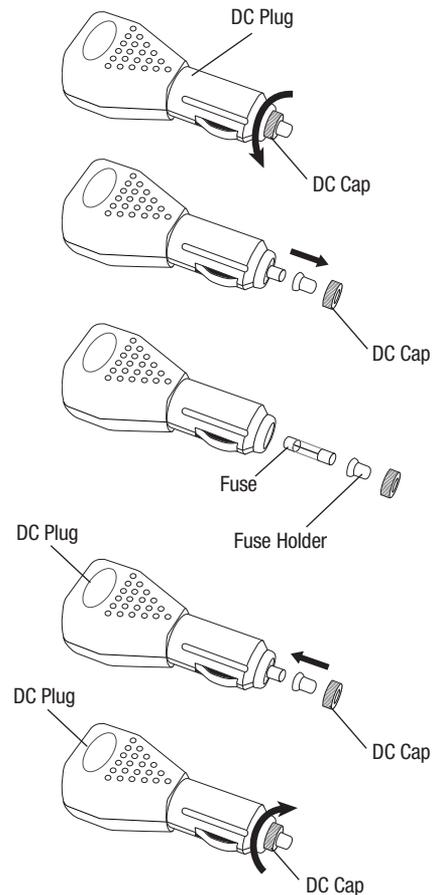

MAINTENANCE

Use only mild soap and damp cloth to clean the outer housing.



Contains lithium-ion battery.
Battery must be recycled or
disposed of properly.

Environmental Protection

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority for recycling information.



DISTRIBUTED BY:

TechBrands by Electus Distribution Pty. Ltd.

320 Victoria Rd, Rydalmere

NSW 2116 Australia

Ph: 1300 738 555

Int'l: +61 2 8832 3200

Fax: 1300 738 500

www.techbrands.com

Made in China